

Global Information Assurance Certification Paper

Copyright SANS Institute Author Retains Full Rights

This paper is taken from the GIAC directory of certified professionals. Reposting is not permited without express written permission.

Interested in learning more?

Check out the list of upcoming events offering "Hacker Tools, Techniques, and Incident Handling (Security 504)" at http://www.giac.org/registration/gcih

BASELINES AND INCIDENT HANDLING

GCIH Gold Certification

Chris Christianson, infosecsurvivor@gmail.com

Advisor: Pedro Bueno

Accepted: February 23rd 2007

Table of Contents

1.	Introduction3
2.	Importance5
3.	Baselines to Establish10
4.	How to Establish Baselines
	(Windows, *nix, Cisco)17
5.	Examples
6.	Conclusion
7.	References
8.	Appendix A: Baseline Bat

1. Introduction

Preparation is an important part of the incident handling process (SANS, n.d.); it is the only part of the process that an incident handler can do ahead of time. Preparing well can help an incident handler to identify and respond to an incident more quickly. It can also help him or her to be more efficient throughout the entire incident handling process.

While there are many things that an incident handler can do to prepare, one of the most commonly overlooked and underestimated things is the establishment of baselines. Why is the establishment of baselines so important in incident handling? What baselines should be established? How are they established? How do they aid an incident handler in the detection and monitoring phases of incident handling?

The purpose of this paper is to explain why the establishment of baselines is an important part of incident handling and how doing so can be a useful tool for an incident handler during incident handling process. Examples will be given regarding how to establish baselines on various types of systems and network equipment. Also, demonstrations will be given showing what to look for when attempting to identify, using baselines, whether an incident has occurred.

Share the the second of the se

2. Importance

What is a baseline? Merriam-Webster defines a baseline "as a line serving as a basis; *especially*: one of known measure or position used (as in surveying or navigation) to calculate or locate something. A usually initial set of critical observations or data used for comparison or a control" (Merriam-Webster, n.d.). As it applies to incident handling, a baseline is a snapshot of a system or the network-the way it normally works.

Why is the establishment of baselines so important in incident handling? Simply put, baselines can help an incident handler to determine whether or not an incident has occurred. A good incident handler needs to be able to detect incidents as quickly and efficiently as possible-something that is not always an easy task.

Often what happens in incident handling is that something is brought to a handler's attention that causes him or her to suspect that an incident has occurred. The incident handler then begins to investigate, and tries to determine if what has occurred is actually an incident. This can be a rather slow and time-consuming process. It may involve examining many kinds of different logs files, running processes, and the analysis of network traffic. Often the handler may not even know exactly what it is for which he or she is looking. This is where baselines can help.

Most of the time the first question that must be asked concerns what happened or changed. Ascertaining whether something has changed is key for an incident handler in determining where to begin looking for possible problems. Once the change(s)made have been found, the incident handler can look into who or what made the change and why. Did a user or a system administrator make the change? Was it authorized? Or was the change made by something else-perhaps by some malicious code? Baselines can show what has changed and help in answering these important questions.

For example, a user reports that something is wrong with his or her system; specifically, it is running slower than normal. How does an incident handler know whether or not that system really is slower? What if the system is running slowly? What if it is running slowly because of some malicious code? This is when having a baseline helps. If the incident handler knows what the processor, hard drive, and network utilization is normally, he or she will be better able to determine whether or not something is actually wrong. If he or she has a baseline, it will be possible to make this determination more quickly and easily.

Sometimes an incident may occur on a system and it may not even be noticeable by a user. Perhaps a tiny backdoor program is installed onto the system. The program is so small and takes so little of the system's resources that the user will probably never notice it. Yet, if a baseline has been established, an incident handler would know which programs, processes, and services are normally running on this system. That would enable the handler to detect the backdoor program.

Being a good incident handler requires the kind of attention shown by someone who is obsessed with his or her car. Such a person knows everything about the vehicle. He or she takes good care of it, knows where everything is on the vehicle, and understands how everything works. Such a person knows how the car is supposed to run. If something goes wrong with the car-if the car makes an odd sound, for instance-such a person would be aware. This kind of familiarity and attention would allow the person to detect the problem immediately. Baselines help an incident handler in the same way. Baselines help an incident handler to know where everything is at on his or her network and system. It helps the handler to understand how it all works, and how it is supposed to run. If something is not as it should be, just like that person who is obsessed with the car, the incident handler knows about it. Is that system supposed to be running an FTP server? For what is this particular program used? Why is this system sending all this traffic to that system? An incident handler who has established baselines will be able to answer these questions quickly, determine whether or not an incident has occurred, and move on with the incident handling process.

The establishment of baselines is indeed an important part of the preparation stage of the incident handling process. The preparation stage involves obvious things such as creating a plan, organizing a team, and documenting. As noted above, preparation is the only part of the entire incident handling process that can be done ahead of time. It is, in fact, what an incident handler spends most of his or her time doing. Establishing baselines can be considered part of the task of documentation.

Often documentation, especially things such as the

establishing of baselines for system and network performance, is overlooked by system administrators. These matters are considered time-consuming and tedious tasks that serve little purpose. As will be demonstrated, however, nothing could be further from the truth. With a little ingenuity, a few tricks, and a bit of effort, establishing baselines is not a difficult task.

3. Baselines to Establish

In a perfect world, a system administrator would build a system from scratch using media of established high quality. Before the system is ever put into production, he or she would take a snapshot of the system in that perfect state. There would be a list of installed programs and running services. A list of installed hardware might also be useful. Anytime anything on the system is changed, a new snapshot would be taken.

The reality, however, is that this is not a perfect world. Rarely, if ever, does a system administrator have a perfect system with which to work. What, then, is an incident handler to do in such a situation? He or she uses the "Last Known Good" configuration so to speak.

Sometimes an incident handler is going to have to assume that, at this particular point in time, the system or network is good; in other words, it is running properly. At this point, a baseline can be established.

This is not perfect, to be sure, but a system administrator has to begin somewhere. As will be discussed later, once a system administrator discovers what is running on his or her systems and networks, he or she can work backwards. Gaining insight into the network, the system administrator can then uninstall any unnecessary programs or services that aren't needed. He or she can clean up the systems and then establish newer, better baselines. From this point going forward, of course, he or she will at least know if something has changed.

With the understanding that a baseline can be established from the "Last Known Good" configuration, what kind of baselines should we establish? The following is a list of some useful baselines:

- List of installed programs and running services;
- Processor utilization, memory utilization, hard drive utilization, and network utilization; and
- Logs.

This list is by no means exhaustive; there are many other possible baselines that could be established. Which baselines a system administrator chooses to establish depends largely upon the administrator and his or her environment. The thing to be borne in mind is that it is important to establish what is running on the system and how.

The following sections discuss each of the above-named baselines in more detail.

List of Installed Programs and Running Services

It is helpful to have a list of the installed programs and services running on each system. This list should include the version numbers of programs, as well any hot fixes, that are installed. Such information is beneficial for a number of reasons. First, knowing which programs are installed and what services are running on a system will help an incident handler to understand what a system should be doing. With this information, an incident handler will also know what a system should not be doing.

Having a list of installed programs and running services will also help an incident handler to know if something has changed on the system; this can help an incident handler to determine weather or not a new, possibly unauthorized, program has been installed on the system. Should the system have program X installed on it? Was program X always previously installed? Is the system being used for program X's purpose? Is this a critical function of the system? Having a list of installed programs and running services will help an incident handler to answer these questions. When one is looking at a long list of services and programs that are running, it may be difficult to determine the exact purpose of each application and process and whether or not it has always been there. When this information is made available ahead of time, assessing the situation is much easier. Baselines ease this task, allowing the incident handler to compare what was running previously vis-à-vis what is running now.

Information about different programs and services can be found at a number of different Internet sites; simply going to www.google.com and searching for the program or service in question will usually allow an incident handler to identify quickly what it is. The following is a list of some other Web sites where incident handlers can look up information about various programs and services:

- o www.tasklist.org-A site that contains a list of
 processes;
- o www.processid.com-Another site that contains a list of
 processes;
- o www.answersthatwork.com/Tasklist_pages/tasklist.htm-Another site that contains a list of processes;
- o http://www.liutilities.com/products/wintaskspro/proces

slibrary/-Another site that contains a list of process; this site can also scan for processes.

System Utilization

It is also important to obtain baselines for system utilization. Baselines for processor, memory, and hard drive utilization can be very useful to an incident handler in detecting weather or not something has occurred on a system.

For example, if a system's processor utilization suddenly jumps to 100% and nothing has changed on the system, this could be a sign of a virus or worm. In fact, this exact symptom would be something that might be observed on a system that had been infected by the Code Red worm. One of the telltale signs of this particular worm is high processor utilization (Cisco, 2001).

The same may be said for other system utilization baselines. One of the most valuable baselines that can be established is the baseline for network utilization. Seeing a large amount of traffic going between one system and another could be an indication that the system has been infected by some malware. That was the case with the SQL Slammer worm (Gerhards, 2003).

Logs

Logs are a valuable source of information to system administrators and incident handlers alike. While not commonly thought of as being useful for baselines, indeed they are. They contain all sorts of information that can help an incident handler determine what is normal and whether anything has changed on a system. For example, perhaps an incident handler is examining system logs and notices some invalid login attempts. Are these invalid login attempts normal? Was the invalid login attempt just a case of a user mistyping his or her password? Or was there a large number of login attempts? Were there invalid login attempts to multiple accounts? Was the login attempt in the middle of the night, when the user doesn't normally work? Establishing baselines-knowing what is normal-can help an incident handler to determine weather or not an incident has occurred.

Certain events may be unusual in themselves. The following Web sites contain information about various events that may appear in logs:

www.eventid.net-Subscription-based service that

contains lists of different events; and

www.microsoft.com/technet/support/ee/ee_advanced.a
 spx-Microsoft TechNet Events and Error Message
 Center.

And the second s

4. How to Establish Baselines

(Windows, *nix, Cisco)

How does a system administrator or an incident handler go about establishing these various types of baselines on different systems? This section discusses some of the most common baselines that can be established on some popular network operating systems and devices.

Windows Systems

The following are some popular commands and utilities that can be used to get baselines of currently supported Windows Systems:

Performance Logs and Alerts

Performance Logs and Alerts can be used to monitor Windows Systems performance statistics. This program can be accessed by either of the following:

```
Start > Run > type `perfmon'
or
```

Start > Control Panel > Administrative Tools >

Performance

Performance Logs and Alerts open. By default there are three counters running: one for disk, one for memory, and one for processor utilization. However, these are not being logged to a file. In order to log these (or any other) settings to a file, these steps should be followed:

- 1. Right-click on "Counter Logs";
- 2. Select "New Log Settings";
- 3. Type a name for the "New Log Settings";
- 4. Click "OK";
- The "Properties" dialog box opens.

Baseline Properties 🛛 🕐	
General Log Files Schedule	
Current log file name:	
C:\PerfLogs\Baseline_20071206.blg	
This log begins immediately after you apply changes.	
Counters:	
\\NETADMN-FB8382F\Memory\Pages/sec \\NETADMN-FB8382F\PhysicalDisk(_Total)\Avg. Disk Queue Length	
\\NETADMN-FB8382F\Processor(_Total)\% Processor Time	
Add Objects Add Counters Remove	
Sample data every:	
Interval: 15 🛟 Units: seconds 🗸	
Run As: <default> Set Password</default>	
	1
OK Cancel Apply	

Figure 1. Properties Dialog Box

The Properties Dialog box has three tabs: "General," "Log Files," and "Schedule." To add counters, click the "Add Counters" button. The following is a list of some of the most useful counters for incident handling:

- Memory\Pages/sec;
- PhysicalDisk[_Total]\Avg. Disk Queue Length;
- Processor[_Total]\%Processor Time;
- Network Interface\Bytes Total/sec

After adding the desired counters, the log file needs to be configured. To do this, click on the "Log Files" tab. The "Log Files" settings are shown below:

	le	
 Log file type and name — Log file type: 		
Binary File	Configure	
End file names with:	yyyymmdd 💙	
Start numbering at:	5	
Example:		
C:\PerfLogs\Baseline_20	1071206.blg	
Comment:		
Overwrite existing log file		

Figure 2. Log Files Tab

While there are a number of different possible settings, probably the easiest method for naming files is to end file names with "yyyymmdd" or any of the options that allow for the use of the date. This will make finding log files later easier.

The "Schedule" tab allows the current log settings to be started and stopped, and a new log file to be created, all at the specified time. The settings shown below start a new log file everyday at 12:00 a.m.:

© SANS Institute 2007,

tart log							
🔵 Manually	(using the sho	rtout meni	u)				
💽 At: 👘	12:00:00 AM	*	on	12/ 4	/2007	~	/
on log							
op log D Manuallu	(using the sho	rtout meni	ŋ				
-							
After:	24 🔶	Units:	ho	urs		1	*
🔿 At: 🛛	5:24:07 PM	A V	on	12/ 5	/2007	~	1
When th	e log file is full.						
When a log	file closes:						
🗸 Start a ne	ew log file						
_ Run this	command:						
					Br	owse	

Another option for scheduling performance logs and alerts is to use Task Scheduler and the Logman utility. The following is the syntax for Logman:

Figure 3. Schedule Tab

logman.exe start <collection_name>

Where the "collection_name" is the name of the log settings.

These settings can also be copied from one system to another simply by saving them. They are saved as .htm/,html files. These files can be placed on Web server where they can then be accessed by other machines using the "New Log Setting From ..." option.

Simple Network Management Protocol (SNMP)

Another method for gathering processor, memory, and network utilization statistics from Windows systems (as well as *nix systems and Cisco devices) is by using the Simple Network Management Protocol (SNMP).) The SNMP allows for the exchange of information between network devices and makes it possible for system administrators to manage and monitor network performance (Cisco, 2006). The protocol is supported by a number of different network management/monitoring programs. The following Web site contains more information about the SNMP:

http://www.cisco.com/univercd/cc/td/doc/cisintwk/ito_doc/snm

p.htm

From the managed system perspective, all that needs to be done to allow system utilization statistics to be collected is to enable the SNMP and then set the SNMP community name. To configure SNMP on a Windows systems, follow the following steps (Microsoft, 2006):

1. Start > Control Panel > Administrative Tools >
Services;

2. In the right pane, double-click "SNMP Service";

3. Click the "Traps" tab;

 In the "Community Name" box, type the community name to which the system will send trap messages;

5. Click the "Add to List" button;

6. Under the "Trap Destinations" box, click the "Add" button;

7. An SNMP Service Configuration Dialog appears; enter the system to which the system will send trap messages and click "Add"; and

8. Click the "OK" button.

While SNMP is a very useful for network management, it can also be a security risk if it is not properly configured. It is very important that, when configuring the SNMP service, security settings are also set. These settings are located on the "Security" tab of the SNMP service. For more information on this, see the following link:

http://support.microsoft.com/kb/324263/

Windows Management Instrumentation Command-Line (WMIC) Tool

The Windows Management Instrumentation Command-Line (WMIC) is a command-line and scripting interface that simplifies the use of Windows Management Instrumentation (WMI) and systems managed through WMI (Microsoft Tech Net, 2008). WMI allows for the effective management of PC and server systems in an enterprise network (Microsoft, 2008). A great deal can be done with this tool, including the gathering of information for the establishment of baselines. Table 1 contains a list of some useful WMIC commands:

WMIC CC	OMMANDS AND DESCRIPTIONS
wmic.exe OS list full	Lists information about the operating
	system
wmic.exe USERACCOUNT	Lists information about user accounts
list full	
wmic.exe GROUP list	Lists information about groups

full	
wmic.exe SHARE list	Lists information about shares
full	
wmic.exe PROCESS list	Lists information about processes
full	
wmic.exe SYSDRIVERS	Lists information about drivers
list full	
wmic.exe SERVICE list	Lists information about devices
full	
wmic.exe JOB list full	Lists information about scheduled jobs
wmic.exe STARTUP list	Lists information about startup programs
full	
wmic.exe NICCONFIG list	Lists information about network
full	configuration

Table 1. WMIC Commands

This list of commands is by no means a complete list of all the information available using WMIC, but it is a good starting place for system administrators and incident handlers to get a picture of what is running on their systems. For more information on the WMIC, see the following link:

http://www.microsoft.com.nsatc.net/resources/documentat ion/windows/xp/all/proddocs/en-us/wmic.mspx?mfr=true

Other Built-in Windows Commands

There are also a number of other built-in Windows commands that are very useful for establishing baselines. Table 2 lists some of these commands.

Built-in Windows Commands			
ver	Displays the Windows version		
ipconfig /all	Displays network configuration		
netstat -ano	Displays open ports		
route print	Displays routing table		
dir %SYSTEMDRIVE% /A:H /S /ON	Displays hidden files with last-		
/T:W /N	modified date		
dir %SYSTEMDRIVE% /A:-D /S ON	Displays non-hidden files with		
/T:W /N	last-modified date		
at	Displays a list of scheduled jobs		
tasklist	Displays a list of running		
	applications (XP, 2003)		
systeminfo	Displays basic system information		
	(XP, 2003)		

Table 2. Built-in Windows Commands

Everything that has been discussed thus far is built into Windows and installed by default when Windows is installed. The next commands are part of Windows, but they are not installed by default and are considered optional installations.

Support Tools

The following utilities are part of "Windows Support Tools." Usually these utilities are located on the Windows system installation CD in the "Support" directory. They can also be downloaded from Microsoft's Web site. Table 3 lists some of these Support Tools.

	Support Tools
netdiag /v	Displays networking configuration
diruse "C:\"	Lists byte and file count for C:\\
diruse /S ``%SYSTEMROOT%"	Lists byte and file count for Windows directory
diruse /S	Lists byte and file count for Program
"%PROGRAMFILES%"	Files directory
filever %SYSTEMDRIVE% /s	Lists all files, their versions, and
/b /v	attributes

Table 3. Support Tools

In order to install all of these tools, one must install Windows Support Tools with the "Complete" option. This option also installs another very useful utility, called WinDiff, which can be used for comparing different files and will be discussed in the next section.

Port Scanner or Vulnerability Scanner (Nmap)

The next baseline to be established is that concerning the ports that are open on a system. This can be accomplished using any port scanner or vulnerability scanner, such as Nmap. This is a fast free post scanner available at insecure.org. Scheduling Nmap, or any scanner for that matter, to run once a night or week, and then sending that output to a file, is all that is needed to establish this baseline.

The following command can be used to scan Windows, *nix systems and Cisco devices, and to send the output to a file:

Nmap <IP Address> > baseline.txt

It is important to keep in mind that Nmap is a very powerful tool and it should be installed on a system that is safe and secure. Care should be taken to make sure that output from the Nmap command is limited to authorized individuals. The output generated from this command, and the other commands as well, is valuable reconnaissance information for malicious attackers.

File Integrity Checker (MD5SUM/SHA1SUM)

The last baseline that needs to be established is that of a file integrity check. This can be done using any number of

commercial programs, such as Tripwire for Windows or, for free, using MD5SUM of SHA1SUM. The following examples create checksum for most of the critical files in the Windows directory, the System32 directory, the Windows Drivers directory, and the Etc directory.

shalsum C:\Windows*.dll
shalsum C:\Windows*.exe
shalsum C\Windows\System32*.com
shalsum C:\Windows\System32*.dll
shalsum C:\Windows\System32*.exe
shalsum C:\Windows\System32\Drivers*.sys
shalsum C:\Windows\System32\Drivers\etc*.*

Automation and the Results

All of the aforementioned commands can be placed into a batch file and scheduled to run daily, weekly, monthly, or whenever necessary. The best thing about all of this is that, after they are run the first time, there will at least be some sort of a baseline with which to work. From this time onward, if there is a change made to the system, one may simply run the batch file again to establish a new baseline. The output of the all these commands or the batch file can be piped to file. For example:

baseline.bat > baseline_12-8-07.txt

These files can be copied to a network share or to an FTP server. Doing so will make the files easily available for analysis later, and will also prevent them from being deleted or otherwise tampered with. It is important to remember that, once a system has been compromised, one of the malicious attacker's goals will be to hide his or her tracks. It is, therefore, vitally important that the output generated from these commands be moved to another safe and highly secure system.

*nix Systems

The same baselines that were established on Windows systems can also be established on *nix systems. The following section briefly covers some of the useful commands.

*nix Commands			
uname -a	Displays *nix kernel version		
cat /etc/issue	Displays linux distribution and version		
	(Linux only)		
less /etc/passwd	Displays users		
grep :0: /etc/passwd	Displays user accounts with a UID = 0		

ps -aux	Displays processes
find / -uid 0 -perm -	Displays files owned by root (Linux
4000 -print	only)
find / -name "" -print	Displays files with dots and spaces
find / name " " -print	Displays files with dots and spaces
find / -name ". " -print	Displays files with dots and spaces
find /-name " " -print	Displays files with dots and spaces
ifconfig	Displays network configuration
	information
ip link grep PROMISC	Displays network running in promiscuous
	mode (Linux only)
netstat -na	Displays open ports
arp -a	Displays ARP entries
crontab -u root -l	Displays cron jobs scheduled by root
cat /etc/crontab	Displays cron jobs (Linux only)
ls /etc/cron.*	Displays cron jobs (Linux only)
rpm -qa less	Displays list of installed packages
	(Redhat, Mandrake, etc.)
dpkg -1	Displays list of installed packages
	(Debian, Ubuntu, etc.)
lsof	Displays open files

Table 4. *nix Commands

File Integrity Checker (Tripwire)

The last baseline that needs to be established is a file integrity check. This can be done using Tripwire, which is

available for free for *nix systems. After installing Tripwire and creating the Tripwire database, the following command can be used to compare files (McIntyre, 2001a; 2001b):

tripwire -m c

The following are links to several articles from *TechRepublic* explaining how to install and use Tripwire:

- http://articles.techrepublic.com.com/5100-6347-1053490.html; and
- http://articles.techrepublic.com.com/5100-6345-1053398.html.

Automation and the Results

Just as with Windows system, everything on *nix systems can be automated. This can be done by creating scripts (there are a number of different types of scripting technologies that can be used) and then scheduling the script to run using Cron.

Cisco Routers and Switches

Since Cisco routers and Switches are so prevalent, it is important that the method of establishing baselines for these devices also be covered here. Cisco's IOS is a bit different than the operation of a workstation or server; the method of establishing baselines for it is, therefore, also a bit different. The following table lists some commands that can be useful for establishing baselines:

Cisco IC	os Commands
show clock detail	Displays detailed information about the clock
show version	Displays system hardware and software status
show running-config	Displays current configuration
show startup-config	Displays startup configuration
show ip route	Displays IP routing table
show ip arp	Displays IP ARP table
show users	Displays users connected via
	terminal sessions
show logging	Displays log
show ip interface	Displays IP information for
	interfaces
show interfaces	Displays interface information
show tcp brief all	Displays TCP connection
	information
show ip sockets	Displays IP connection
	information
show ip nat translations	Displays IP NAT translation
verbose	table
show ip cache flow	Displays IP route cache flows

show ip cef	Displays Cisco Express
	Forwarding table

Table 5. Cisco IOS Commands

Since such commands are usually run during a session, capturing the output of these commands simply requires turning on the logging for that session.

System Utilization

System utilization for processor, memory, and network is best collected from Cisco devices using SNMP. Again, SNMP can be easily set up on a device (Cisco, 2007). Doing so requires setting the SNMP community name; instructions for doing so on a Cisco device may be found on the following Web site:

http://www.cisco.com/univercd/cc/td/doc/product/softwar e/ios122/122cgcr/ffun_c/fcfprt3/fcf014.htm

SNMP Management Tools

There are many commercial and open source SNMP management tools available to help System administrators and incident handlers in collecting SNMP data. Once configured, these tools can automatically gather, store, and analyze data from devices all over the network. The following are free open-source SNMP management tools:

- Nagios; and
- OpenNMS.

5. Examples

As has been discussed previously, establishing baselines can help an incident handler to determine weather an incident has occurred or not. Once established, determining whether something has changed on a system-such as a new port being opened, a new program being installed, or high network utilization-is quicker and easier. This section gives some examples of baselines in action.

Example #1

In the first example, a baseline has been established for a Windows System. Note that, in order to simplify this example, only the output from the following commands were included in baseline.bat (SANS, 2006): `wmic.exe PROCESS list brief' and `netstat -ano' (See Appendix A - baseline.bat/)

* * * * * * * * * * * * * * * * * * * *	* * * * * * * * * * * * * * * * * * * *	
* * * * * * * *		
* * * * * * * * * * * * * * * * * * * *	* BASELINE	
* * * * * * * * * * * * * * * * * * * *	* * * * *	
* * * * * * * * * * * * * * * * * * * *	* * * * * * * * * * * * * * * * * * * *	

***************** wmic.exe	PROCESS list brief	

HandleCount Name	Priority ProcessId ThreadCount	

WorkingSetS	ize			
0	System Idle Proces	s 0	0	1
28672	-			
255	System	8	4	56
245760				
21	smss.exe	11	616	3
409600				
431	csrss.exe	13	664	11
1912832				
517	winlogon.exe	13	688	23
4739072				
286	services.exe	9	732	18
4345856				
355	lsass.exe	9	744	23
6217728				e.
24	vmacthlp.exe	8	900	1
2220032				5
201	svchost.exe	8	916	19
4866048				
269	svchost.exe	8	992	10
4169728				
1419	svchost.exe	8	1084	74
28340224				
77	svchost.exe	8	1152	б
3313664				
197	svchost.exe	8	1264	14
4435968				
111	spoolsv.exe	8	1408	14
4612096				
142	pNSClient.exe	8	1604	5
5328896				
278	explorer.exe	8	1796	11
16027648				
158	snmp.exe	8	1956	5
3756032	-			
115	svchost.exe	8	2012	6
4145152				
53	VMwareService.exe	13	196	3
2973696				
25	VMwareTray.exe	8	456	1
2928640				

128	VMwareUser.exe	8	1188	2	
6033408					
149	msmsgs.exe	8	1204	4	
884736					
100	alg.exe	8	1304	6	
3579904					
28	wscntfy.exe	8	1596	1	
2023424					
136	wmiprvse.exe	8	1732	6	
5050368					
116	imapi.exe	8	2008	8	6
4034560					
34	cmd.exe	8	648	1	
2953216					
237	wuauclt.exe	8	1176	8	
17375232					Y
39	ntvdm.exe	8	2428	3	
2416640					
153	wmiprvse.exe	8	2512	7	
6402048					
161	wuauclt.exe	8	2576	5	
4079616					
117	wmic.exe	8	2652	3	
5672960					
	* * * * * * * * * * * * * * * * * * * *		-ano		
* * * * * * * *	* * * * * * * * * * * * * * * * * * * *	*			
Active C	onnections				
Proto	Local Address	Foroic	yn Address	Sta	+ 0
PID	LOCAL AUGLESS	FOLET	JII AUULESS	SLC	ice
TCP	0.0.0:135	0.0.0.	0.0	ттс	STENING
992	0.0.0.0.135	0.0.0.	0.0		DIENTING
TCP	0.0.0:445	0.0.0	0.0	ттс	STENING
4	0.0.0.0.445	0.0.0	.0.0		DIENTING
4 TCP	0.0.0:1248	0.0.0	0.0	ттс	STENING
1604	0.0.0.0.1240	0.0.0		112	T EIN TING
TCP	127.0.0.1:1029	0.0.0	0.0	т т (STENING
1304	121.0.0.1.1029	0.0.0		цт5	теллтис
1304					
TCP	172.16.5.132:139	0.0.0	0.0	T T C	STENING

Baselines	and	Incident	Handling 41
-----------	-----	----------	-------------

4		
UDP	0.0.0:161	*:*
1956		
UDP	0.0.0:445	*:*
4		
UDP	0.0.0:500	*:*
744		
UDP	0.0.0:1035	*:*
1152		, C
UDP	0.0.0.0:4500	*:*
744		
UDP	127.0.0.1:123	*:*
1084		
UDP	127.0.0.1:1900	*:*
1264		
UDP	172.16.5.132:123	*:*
1084		5
UDP	172.16.5.132:137	*:*
4		
UDP	172.16.5.132:138	*:*
4		
UDP	172.16.5.132:1900	*:*
1264		
This	is the output from the	e Nmap scan.
	-	-
~		
Starting	Nmap 4.20 (http://inse	ecure.org) at 2008-01-10 12:04

PST Interesting ports on 172.16.5.132: Not shown: 9996 closed ports PORT STATE SERVICE 135/tcp open msrpc 139/tcp open netbios-ssn 445/tcp open microsoft-ds 1248/tcp open hermes Nmap finished: 1 IP address (1 host up) scanned in 3.949 seconds

This is the output from the same baseline.bat run again

later.

* * * * * * * * * * * * *	**************************************	ELINE		
******	****			
* * * * * * * * * * * *	* * * * * * * * * * * * * * * * * * * *	* * * * * * * * * *	* * * * * * * * * * *	*****
* * * * * * * *				
* * * * * * * * * * * *	****** wmic.exe PROC	ESS list b	orief	
* * * * * * * * * * * *	* * * * * * * * * * * * *			
HandleCount	Name	Priority	ProcessId	
ThreadCount	WorkingSetSize			
0	System Idle Process	0	0	1
28672				
282	System	8	4	57
245760				
21	smss.exe	11	616	3
409600		1.2	<i>CC</i> 1	
433	csrss.exe	13	664	11
1986560	winlogen and	1 0	600	22
513	winlogon.exe	13	688	22
4734976 288	services.exe	9	732	19
∠88 4354048	Services.exe	9	132	19
347	lsass.exe	9	744	22
1601536	IBABB.EAC	2	/11	22
24	vmacthlp.exe	8	900	1
2220032	· maconity · circ	J		-
198	svchost.exe	8	916	18
4857856				-
287	svchost.exe	8	992	11
4239360				
1382	svchost.exe	8	1084	71
28053504				
77	svchost.exe	8	1152	5
3301376				
195	svchost.exe	8	1264	13
4431872				
111	spoolsv.exe 🔊	8	1408	13
4608000				
153	pNSClient.exe	8	1604	5
5353472				
285	explorer.exe	8	1796	11

16031744		_		_	
158	snmp.exe	8	1956	5	
3756032					
119	svchost.exe	8	2012	6	
4153344					
53	VMwareService.exe	13	196	3	
2973696					
25	VMwareTray.exe	8	456	1	
2928640					
128	VMwareUser.exe	8	1188	2	
6033408					
155	msmsgs.exe	8	1204	4	
1007616					
104	alq.exe	8	1304	6	
3588096	_				
28	wscntfy.exe	8	1596	1	
2023424	-				
138	wmiprvse.exe	8	1732	5	
4898816		-			
116	imapi.exe	8	2008	5	
4001792	<u>F</u> = 1 110	-		-	
34	cmd.exe	8	648	1	
2977792		J	0 10	-	
237	wuauclt.exe	8	1176	8	
17379328	waaacitteac	0	11/0	0	
39	ntvdm.exe	8	2428	3	
2416640	iie valu. exe	0	2120	5	
158	wuauclt.exe	8	2576	4	
4071424	WUUUUUUUUUU	Ŭ	2370	г	
44	tini.exe	8	3216	3	
1888256	CTHT. EVE	0	7770	J	
34	cmd.exe	8	3232	1	
34 2482176	CIIIQ. EXE	0	2626	Ŧ	
2482176 117	umia ava	8	2256	3	
	wmic.exe	0	3256	3	
5668864 138		8	3304	6	
	wmiprvse.exe	ō	3304	Ø	
5713920					
		etstat -a	no		
* * * * * * * * * * * *	* * * * * * * * * * * * * * * * * * * *				

Proto	Local Address	Foreign Address	State
PID	0 0 0 0 125		
TCP	0.0.0:135	0.0.0:0	LISTENING
992 TCP	0.0.0.0:445	0.0.0:0	TTOURNING
4	0.0.0.0.445	0.0.0.0.0	LISTENING
4 TCP	0.0.0:1248	0.0.0:0	LISTENING
1604	0.0.0.0.1248	0.0.0.0.0	LISIENING
TCP	0.0.0:7777	0.0.0:0	LISTENING
3216	0.0.0.0.1777	0.0.0.0.0	LISIENING
TCP	127.0.0.1:1029	0.0.0:0	LISTENING
1304	127.0.0.1.1029	0.0.0.0.0	LISIENING
TCP	172.16.5.132:139	0.0.0:0	LISTENING
4	1/2.10.3.132.139	0.0.0.0.0	TIPIENING
T UDP	0.0.0:161	*:*	
1956	0.0.0.0.101	•	
UDP	0.0.0.0:445	*:*	
4	0.0.0.0.445		
UDP	0.0.0.0:500	*:*	
744	0.0.0.0.000		
UDP	0.0.0:1035	*:*	
1152	0.0.0.0.1035	0	
UDP	0.0.0.0:4500	*:*	
744	0.0.0.01000		
UDP	127.0.0.1:123	*:*	
1084			
UDP	127.0.0.1:1900	*:*	
1264			
UDP	172.16.5.132:123	*:*	
1084			
UDP	172.16.5.132:137	*:*	
4			
UDP	172.16.5.132:138	*:*	
4			
UDP	172.16.5.132:1900	*:*	
1264			

This is the output from another Nmap scan.

Starting Nmap 4.20 (http://insecure.org) at 2008-01-10 12:05 PST

Interest	ing por	rts on 172.16.5.132:
Not shown	ı: 999!	5 closed ports
PORT	STATE	SERVICE
135/tcp	open	msrpc
139/tcp	open	netbios-ssn
445/tcp	open	microsoft-ds
1248/tcp	open	hermes
7777/tcp	open	unknown
1		

Nmap finished: 1 IP address (1 host up) scanned in 3.997 seconds It is worth nothing that the "wmic PROCESS list brief"

command has a new entry, tini.exe. Looking at the output of the "netstat -ano" command reveals that there is a new port opened that wasn't opened before-port 7777. That port is associated with Process ID 3216. Referring back to the output of the "wmic PROCESS list brief" command shows that Process ID 3216 belongs to tini.exe. Looking at the output of the "nmap" command also verifies that port 7777 was open.

Remember that the output from this baseline has been simplified. If a list of files and directories had been included in the output, "tini.exe" would have included on that list. Analyzing the firewall logs from the system might reveal connections to port 7777. If an antivirus program was installed, the system it would probably detect "tini.exe" as malicious software and quarantine the program; this would also appear in logs. "Tini.exe" is a small backdoor program. The following Web site contains more information about tini.exe:

http://www.ntsecurity.nu/toolbox/tini/

WinDiff

WinDiff, a utility mentioned earlier that is available in the Windows "Support Tools," is useful for comparing files and directories. The following is a screenshot of WinDiff, comparing the output from the files created in this example. Notice how WinDiff highlights the lines that are different between the two files that are being compared. This makes it much easier to identify what has changed.

© SANS Institute 2007,

e Edit View	Expand	Options Mark Help				
aseline_1	-10-08_0	1.txt : .\baseline_	1-10-08_02.txt C:\baseline	e_1-10-08_01.txt : C:\baseli	ne_1-10-08_02.txt	Outlin
ΠΠΙ	41	******	*****	netstat -ano ********	******	****
	42		1000			
	43	Active C	onnections			
	44	2.0	0 0 0 0 0			
	45	Proto	Local Address	Foreign Address	State	PID
	46	TCP	0.0.0.0:135	0.0.0.0:0	LISTENING	992
	47	TCP	0.0.0.0:445	0.0.0.0:0	LISTENING	4
	48	TCP	0.0.0.0:1248	0.0.0.0:0	LISTENING	1604
		!> TCP	0.0.0.0:7777	0.0.0.0:0	LISTENING	3216
	49	TCP	127.0.0.1:1029	0.0.0.0:0	LISTENING	1304
	50	TCP	172.16.5.132:139	0.0.0.0:0	LISTENING	4
	51	UDP	0.0.0.0:161	*:*		1956
	52	UDP	0.0.0.0:445	* *		4
	53	UDP	0.0.0.0:500	*:*		744
	54	UDP	0.0.0.0:1035	*:*		1152
	55	UDP	0.0.0.0:4500	*:*		744
	56	UDP	127.0.0.1:123	*:*		1084
	57	UDP	127.0.0.1:1900	* *		1264
нцц	58	UDP	172.16.5.132:123	* *		1084
	59	UDP	172.16.5.132:137	*:*		4
	60	UDP	172.16.5.132:138	* *		4
	61	UDP	172.16.5.132:1900	*:*		1264

Figure 4. WinDiff

Ndiff

Another option for comparing the output of Nmap scans is a program called Ndiff. According to its authors, Ndiif can be used to, "compare putatively similar files, ignoring small numeric differences" (Beebe, 2004). The following example demonstrates how to use Ndiff to compare scan output:

First, create a baseline using the following command (PenguinSoft, 2000):

nmap -m baseline.nm <IP Address>

Next, scan the system later to see if anything has changed: nmap -m 12-24-07.nm <IP Address>

Finally, compare the output of the scans using Ndiff:

ndiff baseline.nm 12-24-07.nm

The following site contains more information about using

Ndiff:

http://www.penguin-

soft.com/penguin/man/3/NDiff_Quickstart.html

Example #2

In the next example, a baseline was established of another Windows system. The following is a snapshot of the processor, memory, and network utilization of the system for a 1-hour period. It is typical of the system utilization during most times.

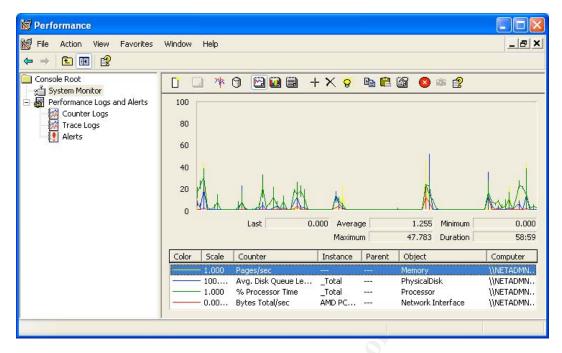


Figure 5. System Monitor Snapshot #1

This is another snapshot of the same system, later.

© SANS Institute 2007,

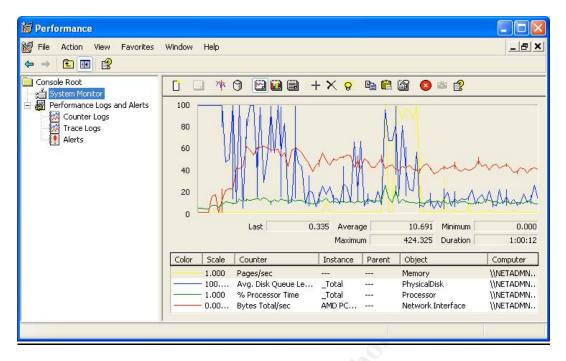


Figure 6. System Monitor Snapshot #2

Looking at Figure 6, several different things stand out. The "Average Disk Queue Length" is spasmodic, indicting a great deal of reading and writing to hard disk. The "Bytes Total/sec" is higher than normal, and it is higher than normal for a long period of time. It is important to remember that this is over the period of 1 hour. That is a lot of network traffic, compared to what would be normal for that period of time.

In this particular instance, the reason for the large

increase in traffic was that the user had installed a bittorrent client on their workstation and was downloading a large file. If other baselines had been established, they would have shown other indications of this activity, such as the bittorrent client being an installed program and a running process. New port numbers would have also appeared as open.

The point of this particular example is to show the benefits of establishing baselines for system utilization-in this case, network utilization. Doing so can help a system administrator or an incident handler to deal with a possible incident. Network utilization could also be monitored from routers and switches with the same result.

© SANS Institute 2007,

6. Conclusion

The examples given above are very simple, yet effective, demonstrations of how baselines can be used in incident handling. These baselines could have been established with any number of different tools; the examples could have been from any malware, or from of any number of different events. The results, however, would have been the same. The establishment of baselines makes an incident handler's job quicker and easier.

Without baselines, an incident handler would be left to guess, using his or her own intuition as regards whether or not the items in the examples above were normal.

It must also be acknowledged that baselines do not solve everything; they are just one part of a strategy of defense-indepth. Even after they have been established, baselines can be fooled. In the first example, what if the output of the baseline were modified to hide "tini.exe"? What if a rootkit that hid the process were installed? In the second example, what if the network traffic were throttled? What if the bytes sent and received increased only marginally? In these cases, an incident handler might not notice anything out of the ordinary.

The great thing about baselines is that, if the network

traffic was throttled, probably what would happen is that something else would disturb the baseline. Perhaps there would be an unusual process running, for instance. The bottom line is that, even though baselines do not solve everything, they do give an incident handler another tool he or she can use to identify an incident.

There are also certain things for which establishing baselines can be rather difficult-such as network traffic, which may be very sporadic. Users may browse the Internet throughout the day, downloading files and doing many other tasks that generate network traffic as they go about their daily routines. Determining what is normal and what is not in such cases can be difficult. In the example used in this paper, it was fairly obvious that sustained network traffic of that magnitude was unusual.

Much of what has been discussed in this paper is a simple matter of good network and system administration. Yet, many times these things still are not put into practice. This can be for a number of reasons, including lack of time, lack of skills, and a lack of resources. Fortunately, each of these problems can be overcome with some effort. As has been demonstrated herein, the establishment of baselines is not difficult. System and network administrators can be trained to do so. There is training available from a number of sources, including SANS, where system administrators can learn these valuable skills. Almost all vendors nowadays offer courses on administering their products. These courses usually include instruction in how to maintain and optimize system performance. Concerning resources, there are a number of free open-source solutions available. While these products may not have all of the extras of their commercial counterparts, they still are very effective for monitoring systems.

Having a change management control process in place is also important. Management should ensure that policies and procedures exist for change management, and that they are indeed being followed by staff. This will ensure that staff can quickly and easily determine what has changed on a network or system, and determine whether or not the change was authorized.

Also, the need for good documentation cannot be emphasized enough. Good documentation will help system administrators and incident handlers to determine quickly and easily important factors such as how the network is set up and configured; where a particular system is; and how this particular program is supposed to be configured in order to communicate.

Preparation is an important part of the incident handling process. Preparing well can help an incident handler to identify and respond to an incident more quickly. It can also help him or her to be more efficient throughout the entire incident handling process. As has been shown, the establishment of baselines is an important part of incident handling.

© SANS Institute 2007,

7. References

- Beebe, Nelson H. F. (2004). Ndiff: Compare putatively similar files, ignoring small numeric differences. Retrieved from the University of Utah Department of Mathematics Web site: http://www.math.utah.edu/~beebe/software/ndiff/
- Cisco. (2001). Dealing with mallocfail and high CPU utilization resulting from the "code red" worm. Retrieved from http:// www.cisco.com/warp/public/63/ts_codred_worm.shtml
- Cisco. (2006). Simple Network Management Protocol (SNMP).
 Retrieved from http://www.cisco.com/univercd/cc/td/doc/
 cisintwk/ito_doc/snmp.htm
- Cisco. (2007). Configuring SNMP support. Retrieved from http://
 www.cisco.com/univercd/cc/td/doc/product/software/ios122/12
 2cgcr/ffun_c/fcfprt3/fcf014.htm
- Gerhards, Rainer. (2003). SQL slammer lessons learned. Retrieved from the Monitorware Web site, http://www.monitorware.com/ Common/en/Articles/SQLSlammer-Learnings.php
- McIntyre, Jim. (2001a). Example 2: A sample Tripwire policy file. Retrieved from the TechRepublic Web site: http:// articles.techrepublic.com.com/5100-6347-1053490.html McIntyre, Jim (2001b). Using tripwire for filesystem integrity.

Part 2: Tripwire administration. Retrieved from the TechRepublic Web site: http://articles.techrepublic.com. com/5100-6345-1053398.html

- Merriam-Webster Online Dictionary. (n.d.) Baseline. Retrieved from http://www.m-w.com/dictionary/baseline
- Microsoft. (2006). How to: Configure Simple Network Management
 Protocol (SNMP) in Windows Server 2003. Retrieved from
 http://support.microsoft.com/kb/324263/
- Microsoft. (2008). WMI: Windows Management Instrumentation. Retrieved from http://www.microsoft.com/whdc/system/pnppwr/ wmi/default.mspx
- Microsoft Tech Net. (2008). Using the Windows Management
 Instrumentation Command-Line (WMIC) tool. Retrieved from
 http://www.microsoft.com.nsatc.net/resources/documentation/
 windows/xp/all/proddocs/en-us/wmic.mspx?mfr=true
- SANS. (2006). Security 401: Security essentials. http://
 www.sans.org/training/description.php?mid=61&portal=b4b2467d
 b19bd387b2ebefac4204431f
- SANS. (n.d.) 504-Hacker techniques, exploits & incident handling. Retrieved from http://www.sans.org/training/ description.php?mid=40&portal=b4b2467db19bd387b2ebefac42044

31f

PenguinSoft. (2000). NDiff_Quickstart: Tutorial for ndiff and related tools. Retrieved from http://www.penguinsoft.com/penguin/man/3/NDiff_Quickstart.html

And the state of t

8. Appendix A: baseline.bat

```
@ECHO OFF
                                                         SOS Informatica 1/18/08 1:13 PM
   ECHO
                                                         Formatted: Portuguese (Brazil)
                *****
 ******
   ECHO
  *******
   REM wmic.exe OS list full
   REM wmic.exe USERACCOUNT list full
   REM wmic.exe GROUP list full
   REM wmic.exe SHARE list full
   ECHO.
   ECHO ****************** wmic.exe PROCESS list brief
********************
   ECHO.
   wmic.exe PROCESS list brief > 1.tmp
   REM wmic.exe SYSDRIVER list full
```

```
Baselines and Incident Handling 60
```

```
REM wmic.exe SERVICE list full
  REM wmic.exe JOB list full
  REM wmic.exe STARTUP list full
  REM wmic.exe NICCONFIG list full
  type 1.tmp
                                                              Formatted: Portuguese (Brazil)
  ECHO.
  *****
  netstat -ano
  ECHO.
  REM ver
  REM ipconfig /all
  REM echo netstat -ano
  REM route print
  REM dir %SYSTEMDRIVE% /A:H /S /ON /T:W /N
  REM dir %SYSTEMDRIVE% /A:-D /S ON /T:W /N
  REM tasklist
                                                               SOS Informatica 1/18/08 1:13 PM
  REM systeminfo
                                                              Formatted: Portuguese (Brazil)
  REM netdiag /v
  REM diruse ìC:\î
  REM diruse /S ì%SYSTEMROOT%î
```

```
REM diruse /S ì%PROGRAMFILES%î
```

```
REM filever %SYSTEMDRIVE% /s /b /v
```

```
REM c:\shalsum\shalsum C:\Windows\*.dll
```

```
REM c:\shalsum\shalsum C:\Windows\*.exe
```

```
REM c:\shalsum\shalsum C:\Windows\System32\*.com
```

```
REM c:\shalsum\shalsum C:\Windows\System32\*.dll
```

```
REM c:\shalsum\shalsum C:\Windows\System32\*.exe
```

```
REM c:\shalsum\shalsum C:\Windows\System32\Drivers\*.sys
```

```
REM c:\shalsum\shalsum C:\Windows\System32\Drivers\etc\*.*
```

the set without

SOS Informatica 1/18/08 1:13 PM Formatted: Portuguese (Brazil)