GIAC
CERTIFICATIONS

Global Information Assurance Certification Paper

Copyright SANS Institute
Author Retains Full Rights

This paper is taken from the GIAC directory of certified professionals. Reposting is not permited without express written permission.

Interested in learning more?

Check out the list of upcoming events offering
"Advanced Incident Response, Threat Hunting, and Digital Forensics (Forensics
at http://www.giac.org/registration/gcfa

Analysis of a serial based digital voice recorder

GCFA

Practical for Gold

Version 2.0 (option 2)

Craig S Wright

BDO Chartered Accountants

SANS 2005

© SANS Institute 2006, Author retains full rights.

© SANS Institute 2006, Author retains full rights.

Table of Contents

I. Abstract 1

II. Document Conventions 2

III. Executive Summary 3

1 Method 4

2 Discussion of Findings 9

Spectral Densities 15

3 Further Research 19

4 Conclusions 20

5 Additional Information and Bibliography 21

Definitions 26

6 Appendix 27

Correlations by Device 27

© SANS Institute 2006, Author retains full rights

© SANS Institute 2006, Author retains full rights.

List of Figures

Figure 1 - Time Series Plot of the 5 devices 5
Figure 2 – Aggregated Time Series Plots of Amplitude 5
Figure 3 - Aggregated Time Series Plots of Amplitude for device 5.....6
Figure 4 - Residual White Noise associated with Device 5 6
Figure 5 - Normal Plot of Residual White Noise.....7
Figure 6 – Differenced analysis of Device 1 and device 5 8
Figure 7 - Matched Pairs, Difference: Device 5-Device 1 10
Figure 8 - Matched Pairs - Difference: Device 51-Device 5 11
Figure 9 - Multivariate Correlations.....12
Figure 10 - Time Series Device 1 - Spectral Density 15
Figure 11 - Time Series Device 5 - Spectral Density 16
Figure 12 - Variables Control Chart 16

© SANS Institute 2006, Author retains full rights

© SANS Institute 2006, Author retains full rights.

I. Abstract

This paper will explore issues with a serially accessed digital voice recorder and in particular the retrieval and analysis of the voice files contained on the device. The device, a "VoiceIt" recorder records files to load later into the Dragon Speech recognition software. Unlike standard disk or USB card devices this hardware is accessed using a 9 pin serial link and does not map as a disk drive. There is a SD card expansion slot, though this is not in current use and there is no facility on the device to undelete files and copy them to the SD card. The analysis will derive around extracting the voice files from the device and copying them to a computer in a forensically sound manner. The device has a delete function independent of the PC and may be used "on the road" to dictate files which are later downloaded to the PC host for conversion into text. The device has had voice files deleted without being written to the PC.

Due to a white noise fingerprint in the wave form, it is possible to map files from an individual digital recorder to that specific hardware device.

© SANS Institute 2006, Author retains full rights

© SANS Institute 2006, Author retains full rights.

II. Document Conventions

When you read this practical assignment, you will see the representation of certain words in different fonts and typefaces. The representation of these types of words in this manner includes the following:

`command`	The representation of operating system commands uses this font style. This style indicates a command entered at a command prompt or shell.
`filename`	The representation of filenames, paths, and directory names use this style.
`computer output`	The results of a command and other computer output are in this style
URL	Web URL's are shown in this style.
Quotation	A citation or quotation from a book or web site is in this style.

© SANS Institute 2006, Author retains full rights.

© SANS Institute 2006, Author retains full rights.

III. Executive Summary


This paper presents a new approach to the detection of forgeries in digital audio and a possible means to forensically match an audio recording to a specific hardware based digital recorder. Either the hardware device that made the recordings or other recordings from the same digital media recorder need to be a available. The method is based on detecting the underlying white noise created by the recording device. This is a unique stochastic characteristic of the hardware recorder. Any forged region of sound may be shown as not demonstrating the standard white noise pattern.


© SANS Institute 2006, Author retains full rights.


© SANS Institute 2006, Author retains full rights.


1 Method

The primary test involved an analysis of the startup waveform the for each of the five devices. This was achieved by measuring the amplitude of the signal using a digital oscilloscope and recording the measurements for each of the first 112 ms. A wave file was created and downloaded using the VoiceIT software to obtain these samples.

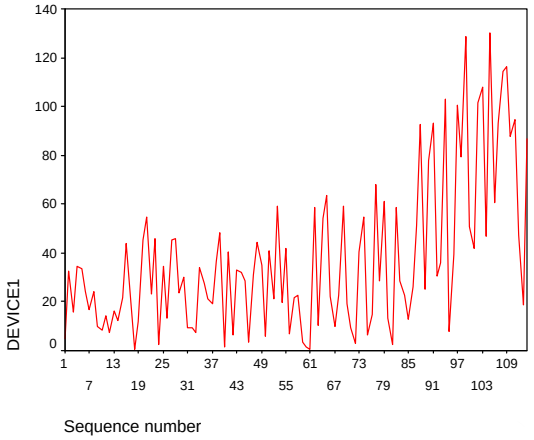

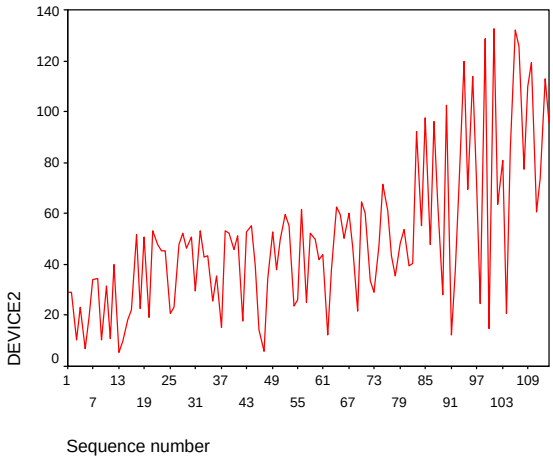


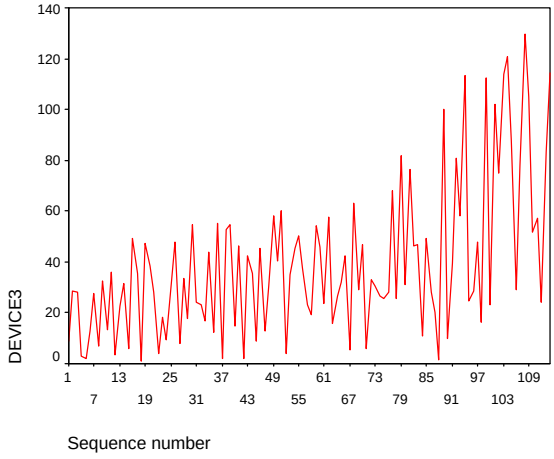

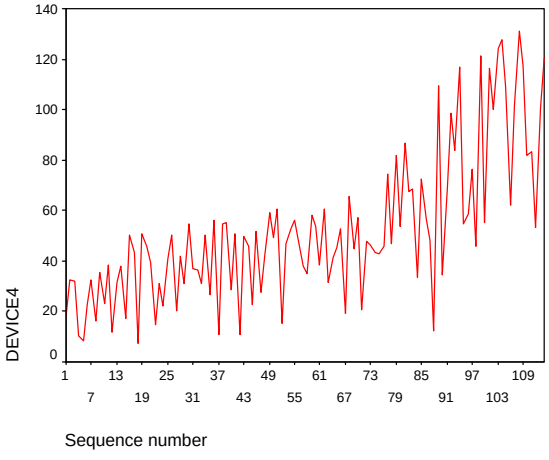

© SANS Institute 2006, Author retains full rights.

Figure 1 - Time Series Plot of the 5 devices

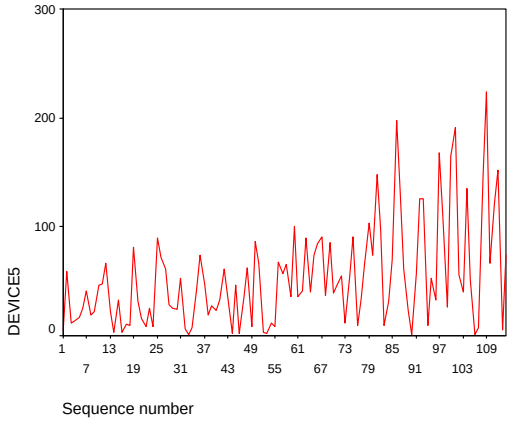

When visually compared, there are some differences but the overall pattern is similar across all devices.

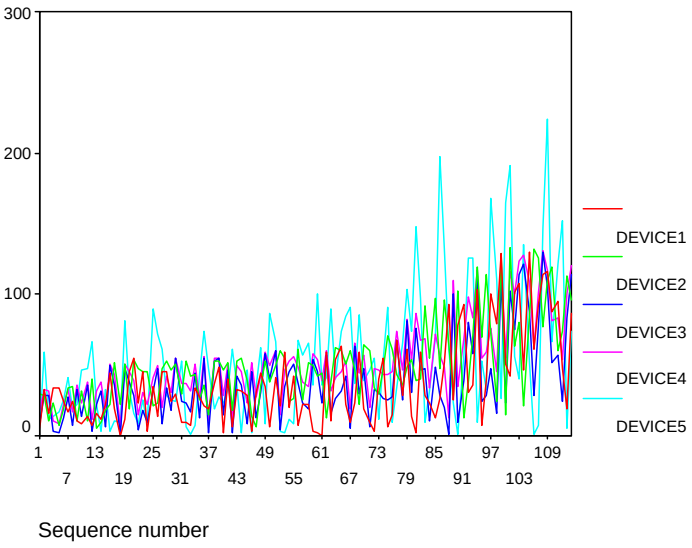


Figure 2 – Aggregated Time Series Plots of Amplitude

© SANS Institute 2006, Author retains full rights.

In order to confirm that the startup pattern remained constant for each device, five separate downloads were conducted and analysed for the 5th device.

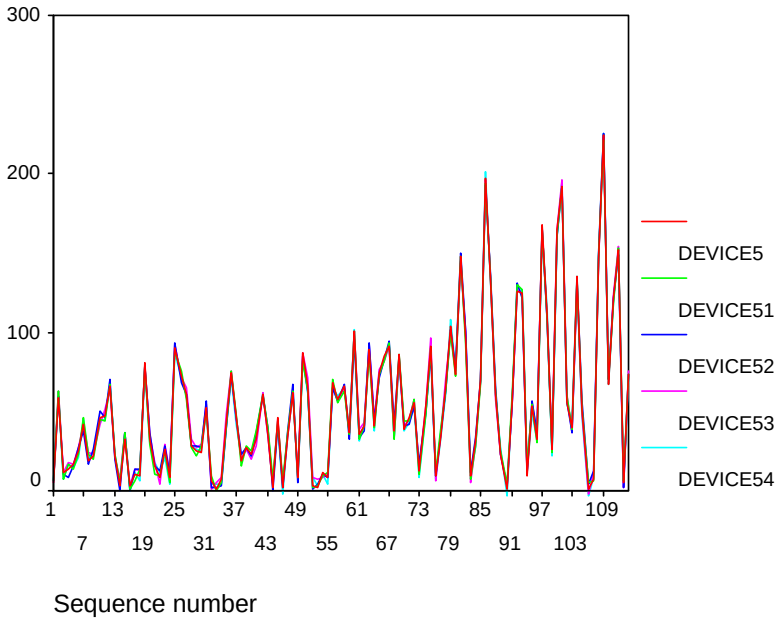


Figure 3 - Aggregated Time Series Plots of Amplitude for device 5

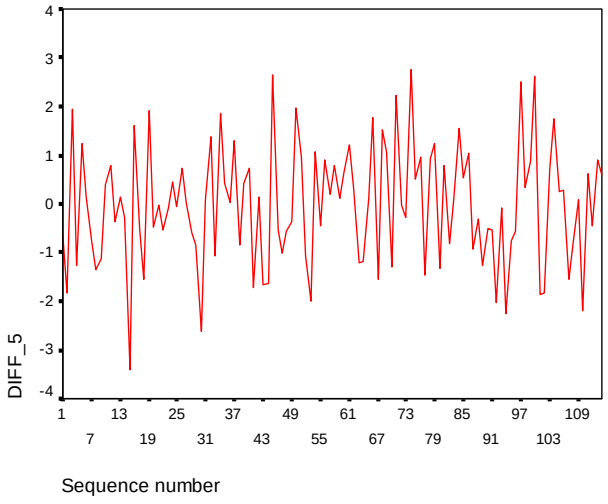


Figure 4 - Residual White Noise associated with Device 5

© SANS Institute 2006, Author retains full rights.

Looking at the differences from each of the results of the 5th device, the differences obtained when each of the five samples was analysed is attributable to IID white noise. It was shown that the differences are normally distributed about the mean.

Confidence Intervals

Parameter	Estimate	Lower CI	Upper CI	1-Alpha
Mean	-0.02754	-0.25728	0.202192	0.950
Std Dev	1.238102	1.095585	1.42358	

Fitted Normal
Parameter Estimates

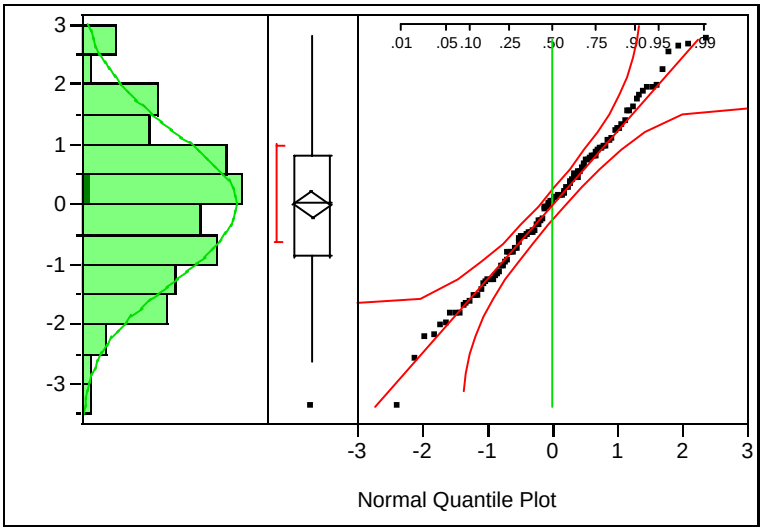



Figure 5 - Normal Plot of Residual White Noise

Type	Parameter	Estimate	Lower 95%	Upper 95%
Location	Mu	-0.02754	-0.25728	0.202192
Dispersion	Sigma	1.23810	1.09558	1.423580

Alternatively, a comparison of the differences from the results of separate devices did not demonstrate any similarity of values. In comparing the values from the first and fifth devices, there is a clear difference in the patterns.

© SANS Institute 2006, Author retains full rights.

Figure 6 – Differenced analysis of Device 1 and device 5

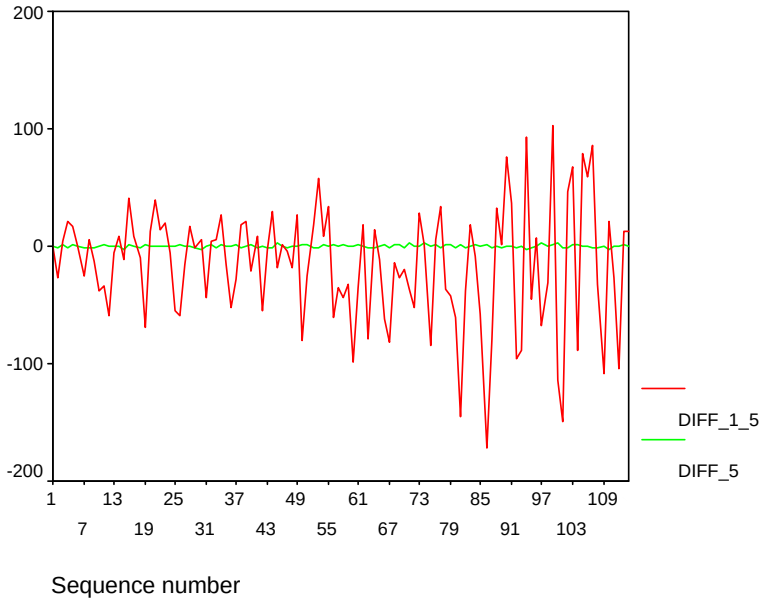

When plotted together, the discrepancies which seemed similar on individual plots are show to be significantly different (as will be upheld using statistical tests later in the paper).

The plot of the discrepancies on the same device are demonstrated to be small and insignificant. This shows us that there is some correlation at the startup stage. From this it is possible to deduce that there is a hardware dependant white noise signature. Each file created with the device may be shown to have the individual white noise signature. Each signature is unique to the individual hardware device.

© SANS Institute 2006, Author retains full rights.

2 Discussion of Findings

A correlation of the wave function was completed across the five devices and against the same device.

Proximity Matrix					
	Correlation between Vectors of Values				
	DEVICE5	DEVICE51	DEVICE52	DEVICE53	DEVICE54
DEVICE5	.000	.998	.998	.998	.998
DEVICE51	.998	.000	.996	.997	.997
DEVICE52	.998	.996	.000	.996	.996
DEVICE53	.998	.997	.996	.000	.997
DEVICE54	.998	.997	.996	.997	.000
This is a similarity matrix					


It is clear with a correlation factor between 0.996 and 0.998 from readings taken that there is a common white noise function that is associated with the device.


Proximity Matrix					
	Correlation between Vectors of Values				
	DEVICE1	DEVICE2	DEVICE3	DEVICE4	DEVICE5
DEVICE1	.000	.473	.532	.604	.230
DEVICE2	.473	.000	.430	.544	.148
DEVICE3	.532	.430	.000	.860	.288
DEVICE4	.604	.544	.860	.000	.381
DEVICE5	.230	.148	.288	.381	.000
This is a similarity matrix					

Alternatively, it is also demonstrated (correlation from 0.148 to .860) that there is a variation between the separate devices. The white noise startup function is similar between the 5 devices, but there is enough of a difference that a white noise fingerprint may be determined.

© SANS Institute 2006, Author retains full rights.

Figure 7 - Matched Pairs, Difference: Device 5-Device 1

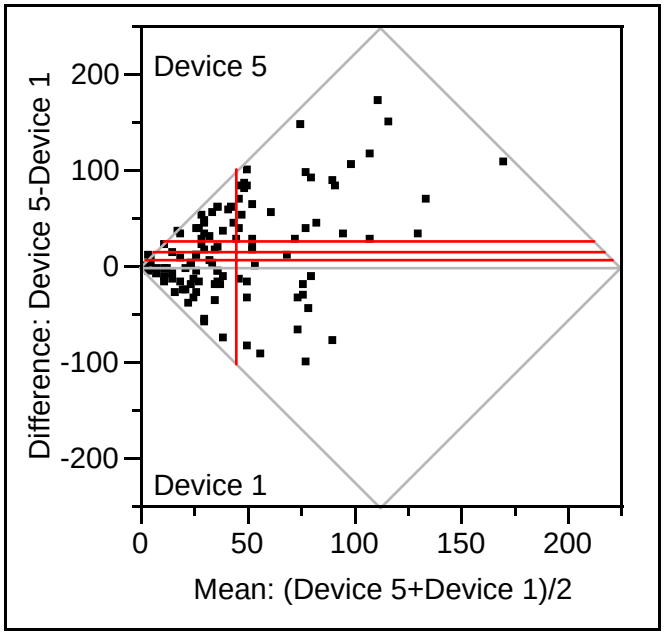

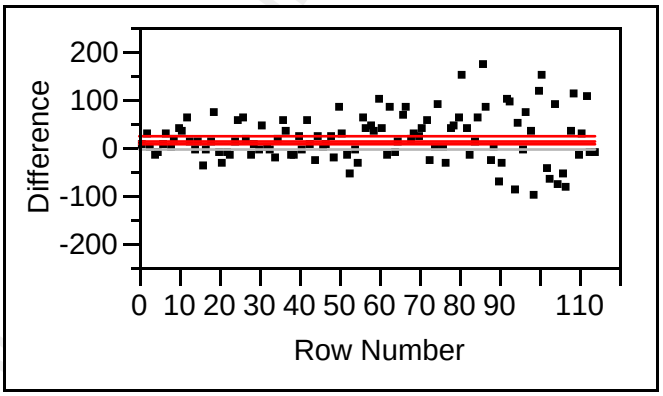

Device 5	53.5432	t-Ratio	3.430242
Device 1	37.4354	DF	113
Mean Difference	16.1078	Prob > |t|	0.0008
Std Error	4.69582		
Upper95%	25.4111		
Lower95%	6.80454		
N	114		
Correlation	0.23026		

Wilcoxon Sign-Rank

	Device 5-Device 1
Test Statistic	1069.5
Prob > |z|	0.002

An analysis of the bi-variate matched pairs model for the separate device wave functions demonstrates that there is some correlation (R^2=5.3%) but as may be seen from the Wilcoxon Sign-Rank Test, the wave forms are significantly different at the alpha = 5% level..

This may be compared again with the results of the correlations from the wave functions obtained from the same device (see below). In this case the correlation is high (R^2=99.65%) and the results are not significantly different.

© SANS Institute 2006, Author retains full rights.


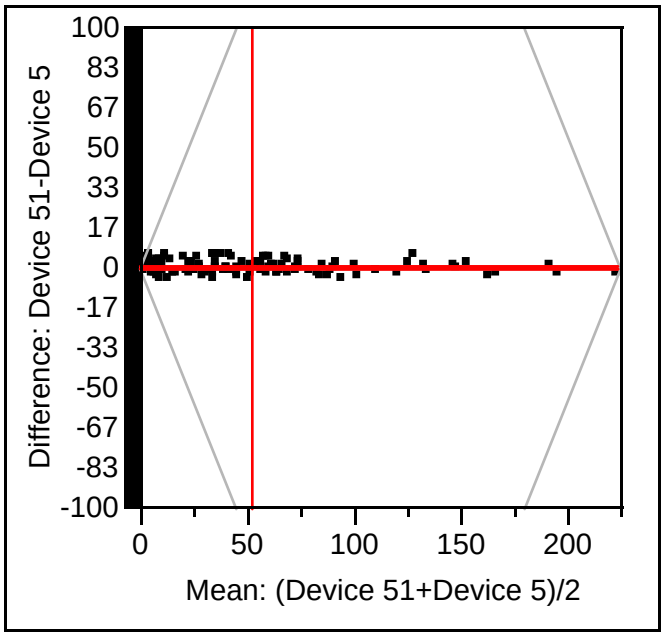


Figure 8 - Matched Pairs - Difference: Device 51-Device 5

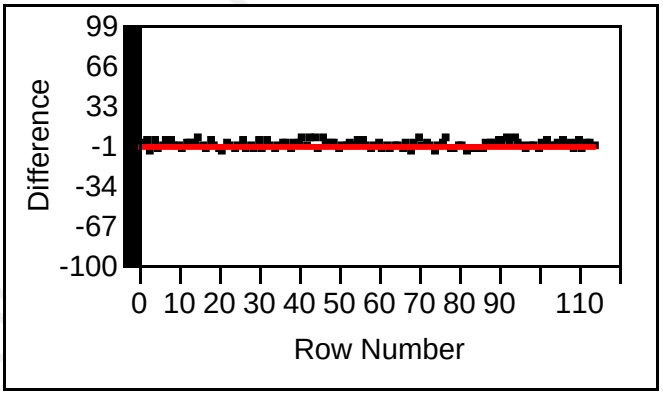

Device 51	53.4068	t-Ratio	-0.51836
Device 5	53.5432	DF	113
Mean Difference	-0.1364	Prob > |t|	0.6052
Std Error	0.26314	Prob > t	0.6974
Upper95%	0.38493	Prob < t	0.3026
Lower95%	-0.6577		
N	114		
Correlation	0.99825		

Wilcoxon Sign-Rank

	Device 51-Device 5
Test Statistic	-248
Prob > |z|	0.486

From this result, we can clearly see that there is a device specific signature to the start-up sequence that is mapped into the resulting waveform and thus the file.

This start-up sequence may be used forensically as a hardware fingerprint to prove conclusively that a file originated from a particular hardware voice recorder. This may be necessary in cases where a forgery is suspected as the resultant wave function will not have the same white noise function as that produced by the hardware recorder being tested if the file was not created on the device.

This is demonstrated clearly in the scatterplots.

© SANS Institute 2006, Author retains full rights.


Figure 9 - Multivariate Correlations

	Device 5	Device 51
Device 5	1.0000	0.9982
Device 51	0.9982	1.0000

Partial Correlations

	Device 5	Device 51
Device 5	.	0.9982
Device 51	0.9982	.

Scatterplot Matrix

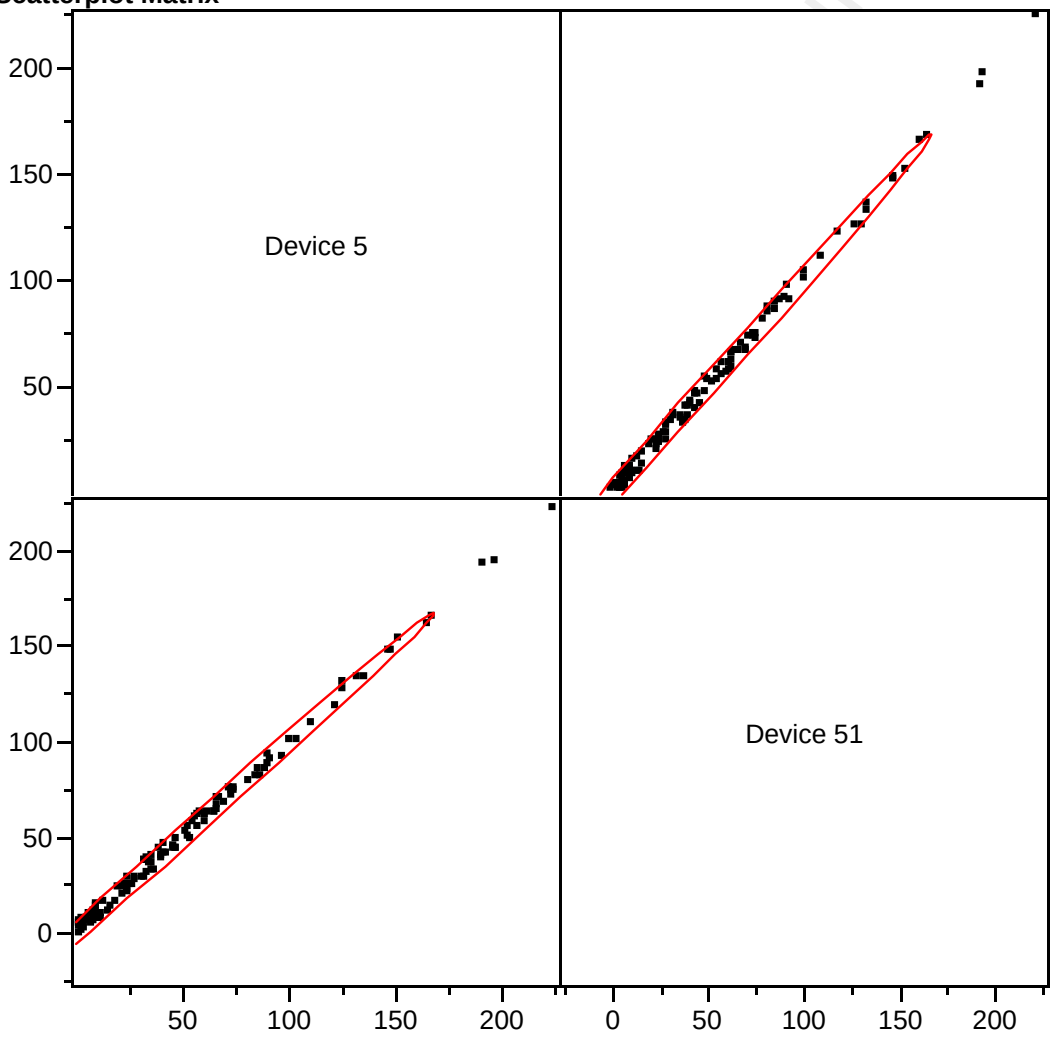

Pairwise Correlations

Variable	by Variable	Correlation	Count	Signif Prob	Plot Corr
Device 51	Device 5	0.9982	114	0.0000	

Cronbach's Alpha

	Alpha	Plot Alpha
Entire set	0.9991	


Excluded Col	Alpha	Plot Alpha
Device 5	.	
Device 51	.	

© SANS Institute 2006, Author retains full rights.

Multivariate Correlations

	Device 1	Device 5
Device 1	1.0000	0.2303
Device 5	0.2303	1.0000

Scatterplot Matrix

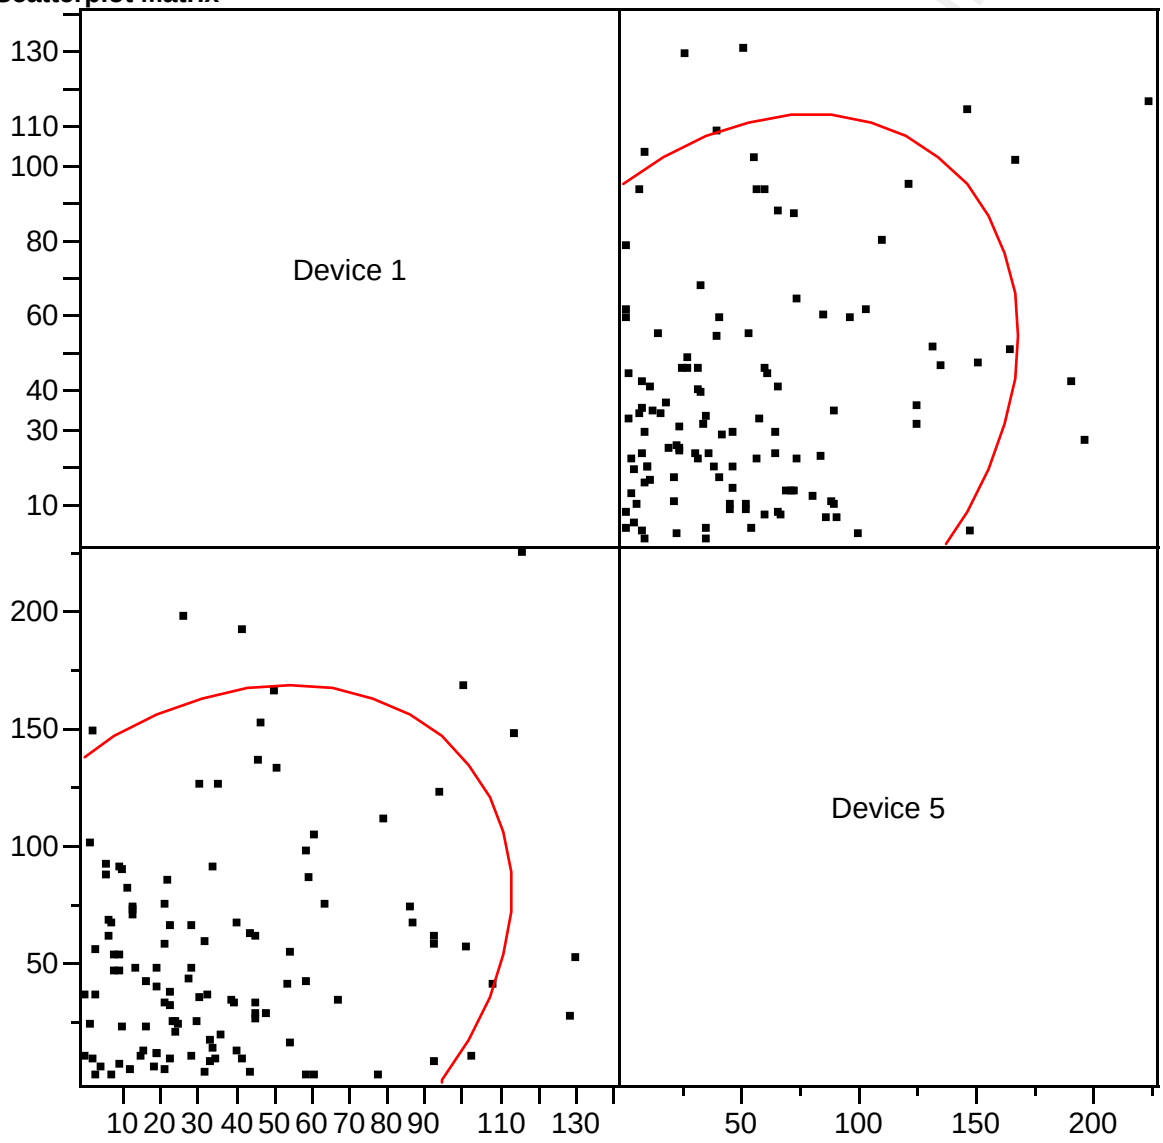

Pairwise Correlations

Variable	by Variable	Correlation	Count	Signif Prob	Plot Corr
Device 5	Device 1	0.2303	114	0.0137	

Cronbach's Alpha

	Alpha	Plot Alpha
Entire set	0.3491	

Excluded Col	Alpha	Plot Alpha
Device 1	.	
Device 5	.	

© SANS Institute 2006, Author retains full rights.

Here we see a significant correlation within the results across recordings on the same device giving a Cronbach's Alpha = 99.91%. This may be compared with the analysis of separate devices. When comparing hardware device 1 and device 5, Cronbach's Alpha is found to be only 34.91% which is not significantly correlated.

The results have demonstrated that there is a strong correlation between wave files produced on the same hardware device. This is contrasted with the ability to significantly demonstrate variation in wave files created on a separate hardware device.


© SANS Institute 2006, Author retains full rights.

© SANS Institute 2006, Author retains full rights.

Spectral Densities

By taking the spectral densities of the individual devices, we can create a unique hardware fingerprint based on the individual white noise function of the device.

Figure 10 - Time Series Device 1 - Spectral Density

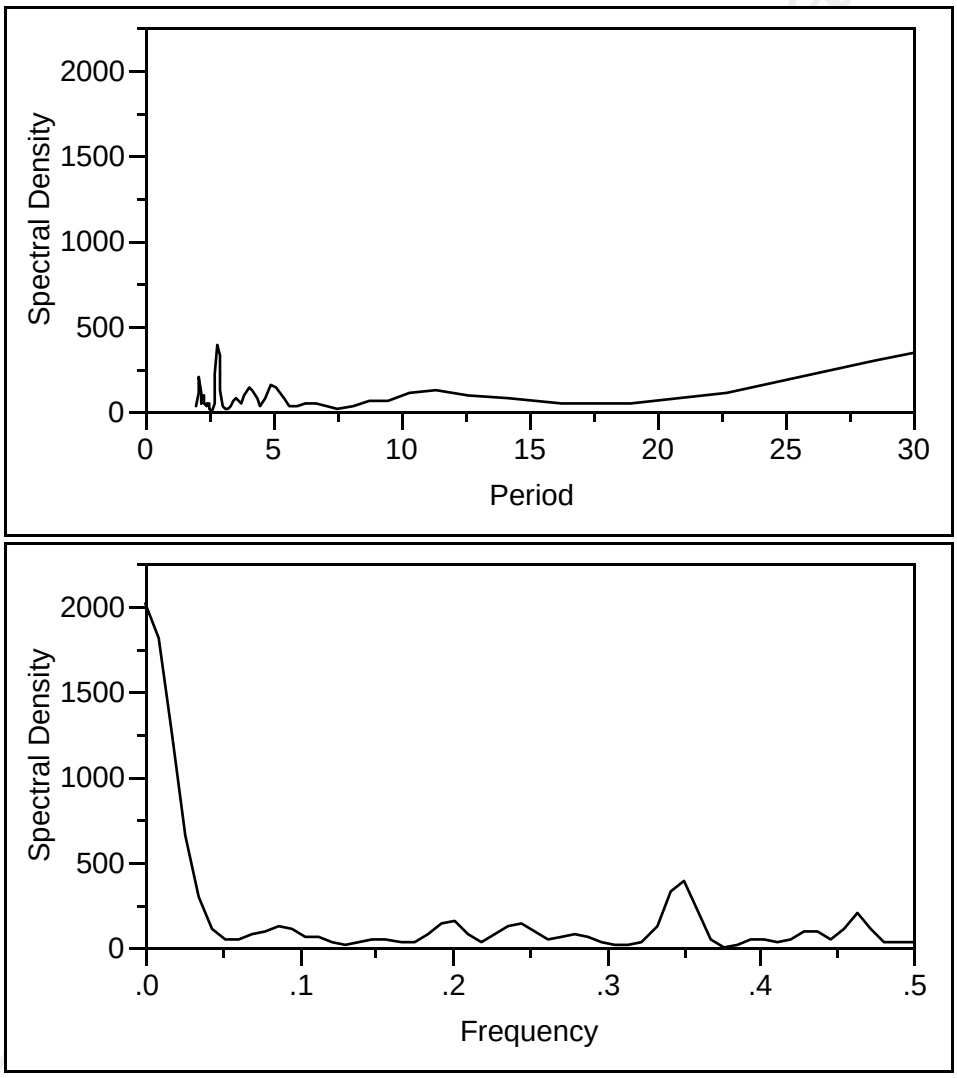


White Noise test

Fisher's Kappa	13.099152
Prob > Kappa	0.0000242
Bartlett's Kolmogorov-Smirnov	0.418624

© SANS Institute 2006, Author retains full rights.

The spectral density is unique for each hardware device and a fingerprint function may be created for the individual device.

Figure 11 - Time Series Device 5 - Spectral Density

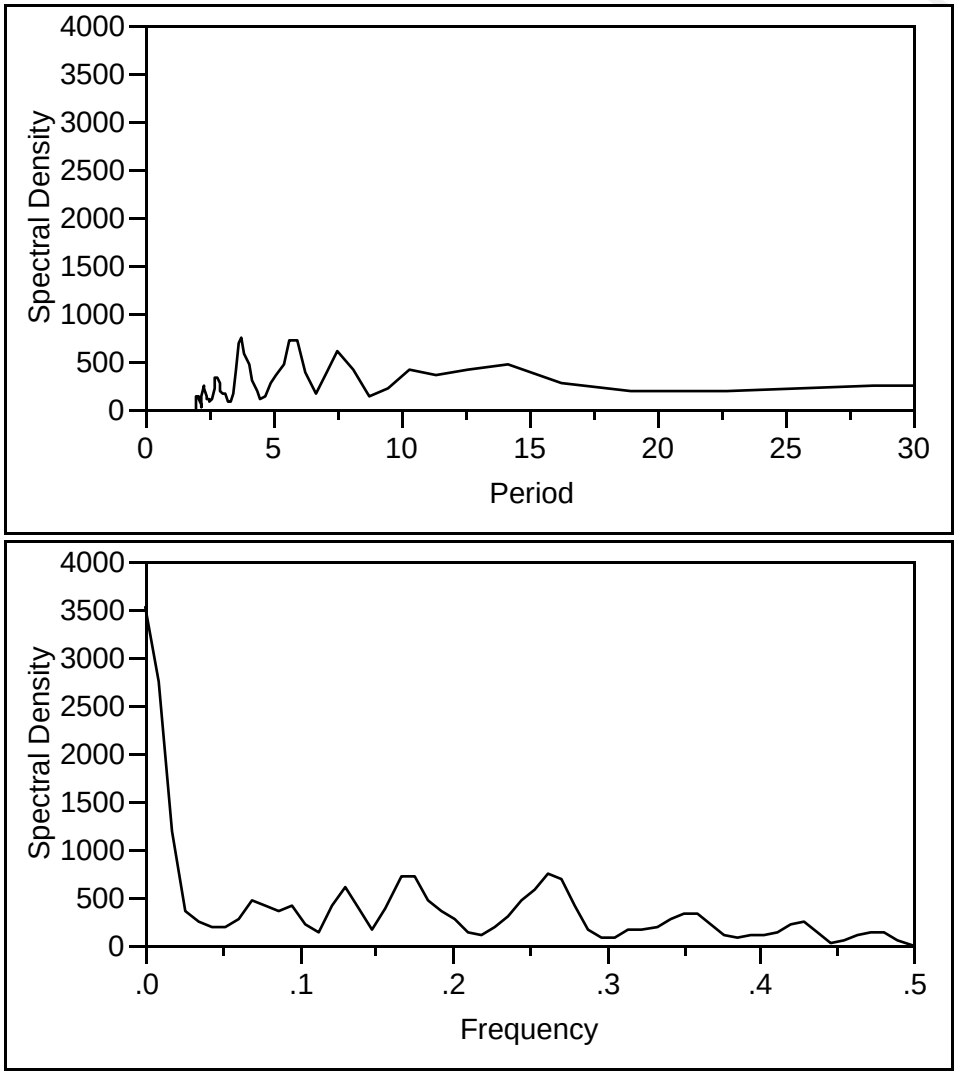


White Noise test

Fisher's Kappa	9.9355812
Prob > Kappa	0.0012104
Bartlett's Kolmogorov-Smirnov	0.236253

Figure 12 - Variables Control Chart


© SANS Institute 2006, Author retains full rights.

XBar of Device 1

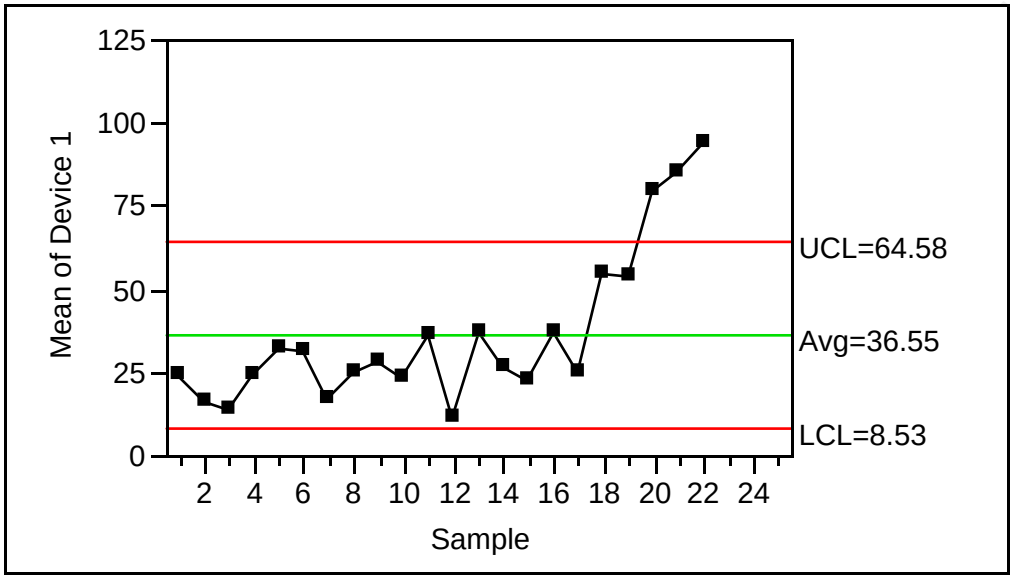


Note: Sigma used for limits based on range.

R of Device 1

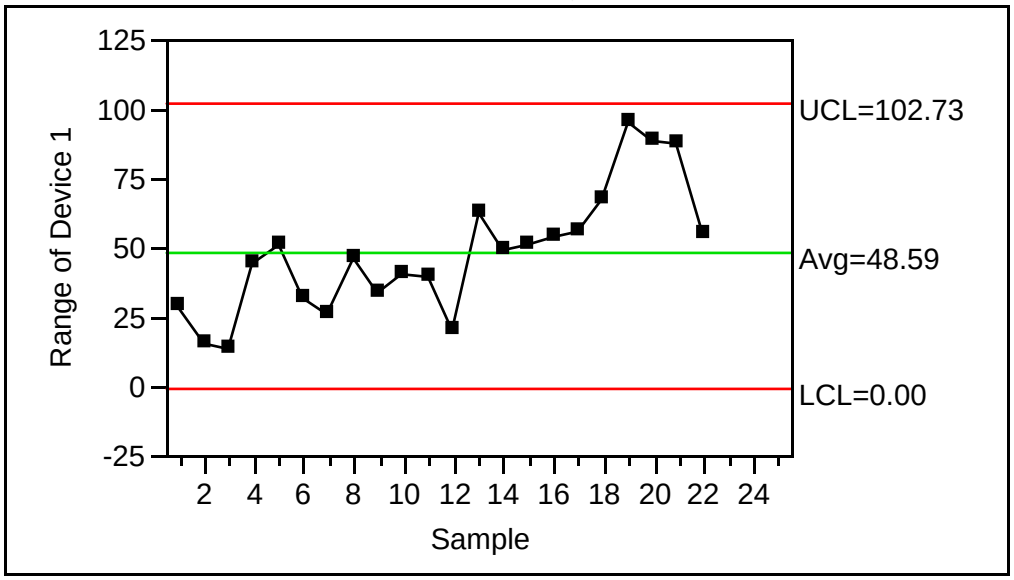


© SANS Institute 2006, Author retains full rights.

XBar of Device 5

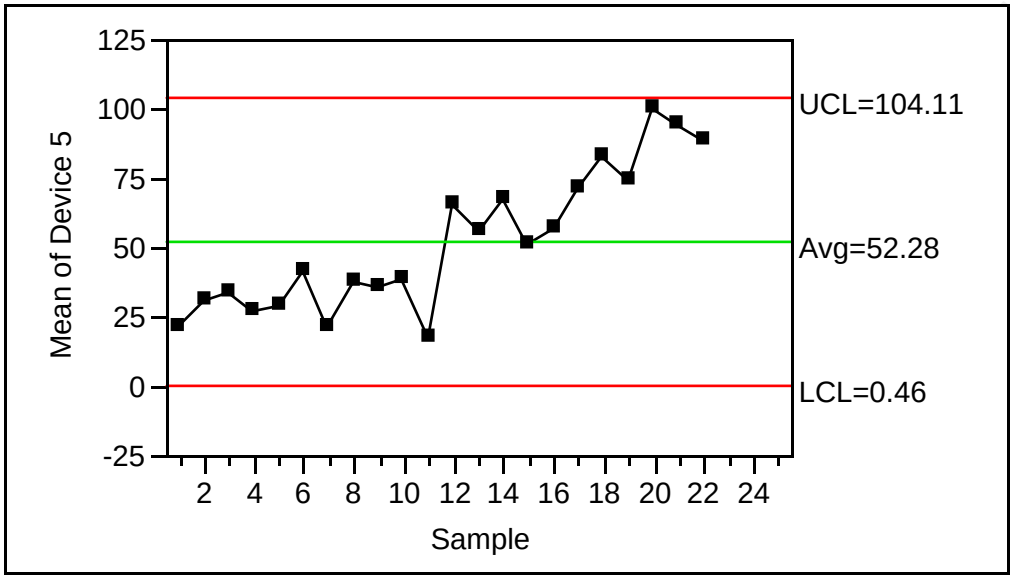

Note: Sigma used for limits based on range.

R of Device 5

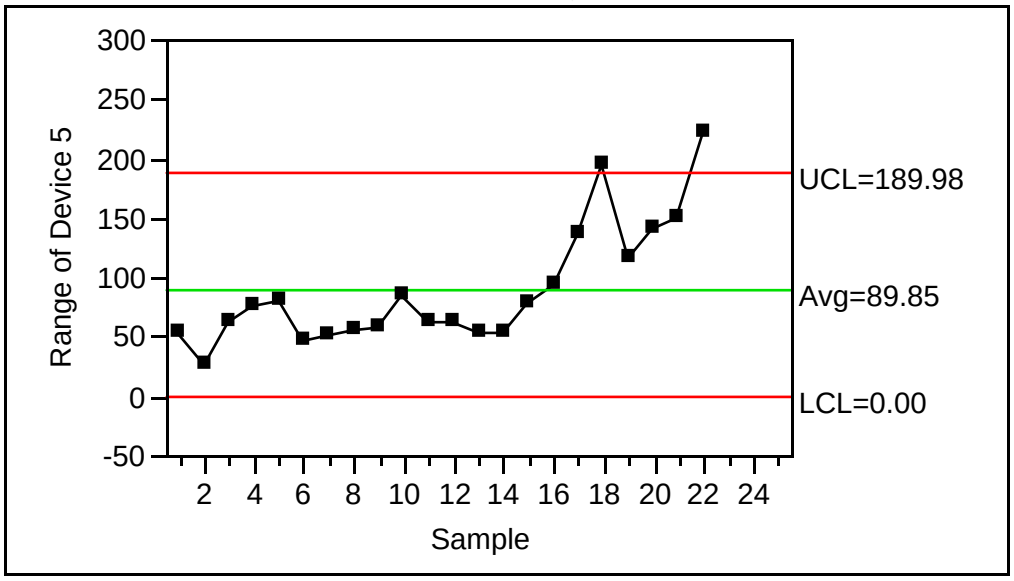

The start-up function may be used as a fingerprint against the hardware to determine if the file was created using the specific device.

© SANS Institute 2006, Author retains full rights.

3 Further Research

Although the tests are significant for the hardware being researched, further work would need to be completed to make these results valid for all hardware based digital recorders. It may also be possible to map wave files to software/ hardware combinations on PC's. This could be the focus of future research.

A test of other devices should also be completed. It would be expected that other devices should satisfy the same white noise differences across a group and it is likely that there it is possible to create signatures for all digital recorders based on this technique. Further research would need to be completed to satisfy this hypothesis beyond reasonable doubt. By testing a sample of the same devices, it is however possible to test this assumption on a case by case basis. This would lead to the testing of a group of devices to prove the white noise function for a device model under investigation.

No compression was used during the test. This is not an issue for wave file based digital recorders, but there may be different results in the case of MP3 or other compression based processes.

© SANS Institute 2006, Author retains full rights.

© SANS Institute 2006, Author retains full rights.

4 Conclusions

It has been demonstrated that we can map an individual digital hardware recorder to a specific wave file. This study verified the ability and developed techniques to allow device fingerprinting that use the devices white noise on start-up to link a sound file to a specific hardware recorder.

The techniques apply to a number of different practically useful goals, ranging from distinguishing between device fingerprinting of audio files to the detection of forgeries. The difficulties associated with digital forensic analysis of PDA's and digital hardware recorders have proven to be an obstacle (Frichot, 2004) and other methods need to be developed to ensure the forensically sound acquisition of data.

This study presents another method that may be utilized in forensic analysis of audio files.

© SANS Institute 2006, Author retains full rights.

© SANS Institute 2006, Author retains full rights.

5 Additional Information and Bibliography

1. Aldrich, John (1997), “R.A. Fisher and the making of maximum likelihood, 1912-1922”, Statist. Sci. 12, no. 3 (1997), 162–176
2. Allamanche, E., Herre, J., Hellmuth, O., Fr¨obach, B. and Cremer, M. “AudioID: Towards Content-Based Identification of Audio Material”, Proc. of the 100th AES Convention, May 2001.
3. Based Multimedia and Indexing. Brescia, Italy: CBMI, September 19-21 2001.
4. Brockwell, P.J. & Davis,R.A. (1996) "Introduction to Time Series and Forecasting", Springer
5. C. Burges, J. Platt, and S. Jana, “Extracting noise robust features from audio data,” in Proceedings of ICASSP 2002, 2002, pp. 1021–1024.
6. Cano, P., Battle, E., Kalker, T. and Haitsma, J. “A Review of Algorithms for Audio Fingerprinting”, pp. 169-173, Proc. of the Int. Workshop on Multimedia Signal Processing, Dec. 2002.
7. Casella, G. & Berger, R.L. (2004) "Statistical Inference". Wadsworth&Brooks/Cole.
8. Chatfield, C. (1996) "The Analysis of Time Series : An Introduction". 5th Ed, Chapman and Hall
9. Cheng, Y. “Music Database Retrieval Based on Spectral Similarity”, pp. 37-38, Proc. of the 2nd Int. Symposium on Music Information Retrieval, Oct. 2001.
10. Cox, I., Miller, M.L., and Bloom, J.A.: Digital Watermarking, Morgan Kaufmann, San Francisco, 2001.
11. Doets, P.J.O., Modelling a Robust Audio Fingerprinting System. Technical Report, http://ict.ewi.tudelft.nl, 2004.

© SANS Institute 2006, Author retains full rights.

12. Frichot, Christian (2004) “An Analysis of the Integrity of Palm Images Acquired with PDD”, Edith Cowan University, WA, Australia
13. Fridrich J., Soukal D., and Lukáš J.: “Detection of Copy-Move Forgery in Digital Images”, Proc. Digital Forensic Research Workshop, Cleveland, OH, August 2003.
14. H. Malvar, “Auditory masking in audio compression,” in Audio Anecdotes,
15. H. S. Malvar, “A modulated complex lapped transform and its applications to audio processing,” in Proc. IEEE Int. Conf. on Acoustics, Speech, and Signal Processing, Phoenix, 1999.
16. Haitsma, J. and Kalker, T. “A Highly Robust Audio Fingerprinting System”, pp. 144-148, Proc. of the 3rd Int. Symposium on Music Information Retrieval, Oct. 2002.
17. Holst, G. C.: CCD Arrays, Cameras, and Displays, 2nd edition, JCD Publishing & SPIE Pres, USA, 1998.
18. J. Foote, “Content-based retrieval of music and audio,” in Multimedia Storage and Archiving Systems II, Proceedings of SPIE, 1997, pp. 138–147.
19. J. Haitsma, T. Kalker, and J. Oostveen, “Robust audio hashing for content identification,” in Second International Workshop on Content
20. J. Herre, E. Allamanche, and O. Hellmuth, “Robust matching of audio signals using spectral flatness features,” in IEEE Workshop on Applications
21. Janesick, J. R.: "Dueling Detectors", OE Magazine, vol. 2(2), February 2002.
22. Janesick, J. R.: Scientific Charge-Coupled Devices, SPIE PRESS Monograph, vol. PM83, SPIE–The International Society for Optical Engineering, January, 2001.

© SANS Institute 2006, Author retains full rights.

23. Johnson M.K. and Farid H.: “Exposing Digital Forgeries by Detecting Inconsistencies in Lighting”, Proc. ACM Multimedia and Security Workshop, New York, pp. 1–9, 2005.

24. K. Diamantaras and S. Kung, Principal Component Neural Networks. John Wiley, 1996.

25. K. Greenebaum, Ed. A. K. Peters Ltd., 2001.

26. Kotz, S., Kozubowski, T.J. and Podg´orski, K. The Laplace Distribution and Generalizations. ISBN 3-7643-4166-1, Birkh¨auser, 2001.

27. L. Lu, H. Jiang, and H. Zhang, “A robust audio classification and segmentation method,” Microsoft Research, Tech. Rep., 2001.

28. Leon-Garcia, A. Probability and Random Processes for Electrical Engineering. 2nd Edition, Addison-Wesley Publishing Company, Inc., 1994.

29. Lukáš J., Fridrich J., and Goljan M.: “Determining Digital Image Origin Using Sensor Imperfections”, Proc. SPIE Electronic Imaging, Image and Video Communication and Processing, San Jose, California, pp. 249–260, January 16–20, 2005.

30. Lukáš J., Fridrich J., and Goljan M.: “Digital ‘Bullet Scratches’ for Images”, Proc. ICIP’05, Genova, Italy, September 2005.

31. Lukáš J., Fridrich J., and Goljan M.: “Digital Camera Identification from Sensor Pattern Noise”, submitted to IEEE Transactions on Information Forensics and Security, 2005.

32. Meignen, S. and Meignen, H.: “On the Modeling of DCT and Subband Image Data for Compression,” IEEE Trans. on Image Processing, vol. 4, pp. 186–193, 1995. A. C. Popescu and H. Farid, “Statistical Tools for Digital Forensics,” Proc. of the 6th Info. Hiding Workshop, Toronto, Canada, 2004.

© SANS Institute 2006, Author retains full rights.

33. Mihcak M.K., Kozintsev, I., and Ramchandran, K.: “Spatially adaptive statistical modeling of wavelet image coefficients and its application to denoising,” Proc. IEEE Int. Conf. Acoustics, Speech, and Signal Processing, Phoenix, Arizona, vol. 6, pp. 3253–3256, March 1999.

34. Ng T.-T. and Chang S.-H.: “Blind Detection of Digital Photomontages using Higher Order Statistics”, ADVENT Technical Report #201-2004-1, Columbia University, June 2004.

35. of Signal Processing to Audio and Acoustics, 2001, pp. 127–130.

36. Popescu A.C. and Farid H.: “Exposing Digital Forgeries by Detecting Traces of Resampling”, IEEE Transactions on Signal Processing, vol. 53(2), pp. 758–767, 2005.

37. Popescu A.C. and Farid H.: “Exposing Digital Forgeries in Color Filter Array Interpolated Images”, IEEE Transactions on Signal Processing, vol. 53(10), pp. 3948–3959, 2005.

38. Popescu A.C. and Farid, H.: “Exposing Digital Forgeries by Detecting Duplicated Image Regions”, Technical Report, TR2004-515, Dartmouth College, Computer Science 2004.

39. R. Duda and P. Hart, Pattern Classification and Scene Analysis. John Wiley, 1973.

40. Rice, J.A., (1995) "Mathematical Statistics and Data Analysis", Duxbury Press

41. S. Sukittanon and L. Atlas, “Modulation frequency features for audio fingerprinting,” in ICASSP, vol. 2, 2002, pp. 1773–1776.

42. Shumway, R. H & Stoffer, D.S, (2000),"Time Series Analysis and its Application" Springer-Verlag New York.

43. T. Cover and J. Thomas, Elements of Information Theory. Wiley Interscience, 1991.

© SANS Institute 2006, Author retains full rights.

44. T. Higuchi. Approach to an irregular time series on the basis of the fractal theory. Physica D, 31:277{283, 1988.

45. T. Zhang and C.-C. J. Kuo, “Heirarchical classiciation of audio data for archiving and retrieving,” in IEEE International Conference on Acoustics, Speech, and Signal Processing, vol. 6, 1999, pp. 3001–3004.

46. Tadayoshi Kohno, Andre Broido & K.C Claffy "Remote physical device fingerprinting" Presented at the IEEE Symposium on Security and Privacy, May 8-11, 2005

47. Wang, A. “An Industrial Strength Audio Search Algorithm”, Proc. of the 4th Int. Symposium on Music Information Retrieval, Oct. 2003.

48. Wayne Jansen & Rick Ayers (2004) "Guidelines on PDA Forensics, Special Publication 800-72" Recommendations of the National Institute of Standards and Technology

© SANS Institute 2006, Author retains full rights.

© SANS Institute 2006, Author retains full rights.

Definitions

The following table defines abbreviations used in this document:

GIAC	Global Information Assurance Certification
MAC	Modified, Accessed, Created times
SOE	Standard Operating Environment
SANS	SysAdmin, Audit, Network, Security
USB	Universal Serial Bus


© SANS Institute 2006, Author retains full rights.

© SANS Institute 2006, Author retains full rights.

6 Appendix

Correlations by Device


Matched Pairs
Difference: Device 2-Device 1

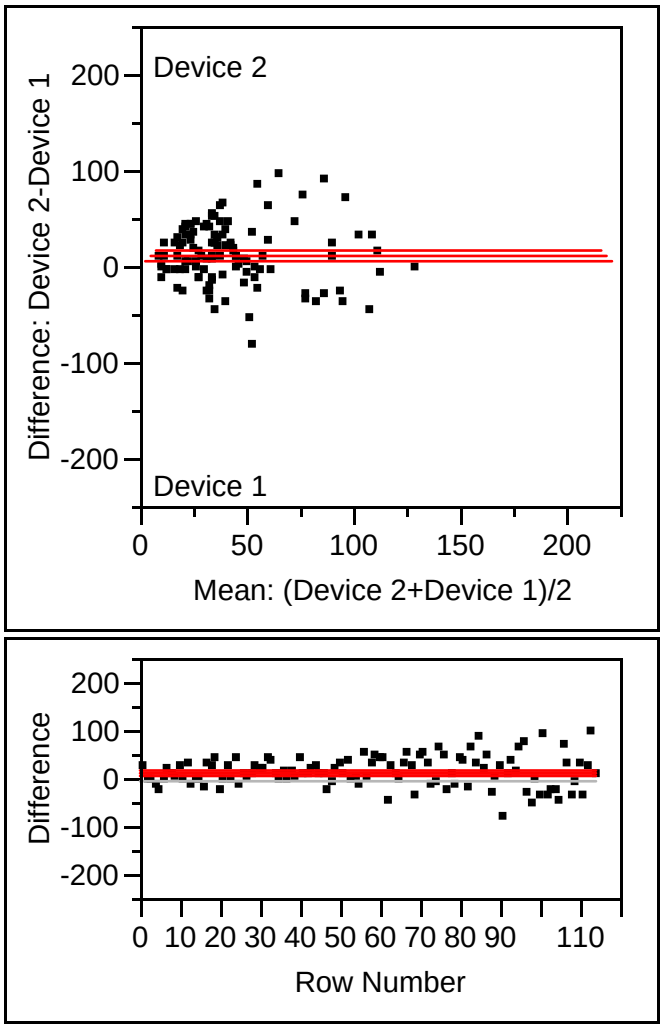

Device 2	49.8094	t-Ratio	4.219716
Device 1	37.4354	DF	113
Mean Difference	12.374	Prob > |t|	<.0001
Std Error	2.93243	Prob > t	<.0001
Upper95%	18.1837	Prob < t	1.0000
Lower95%	6.56436		
N	114		
Correlation	0.47275		

© SANS Institute 2006, Author retains full rights.


Difference: Device 3-Device 1

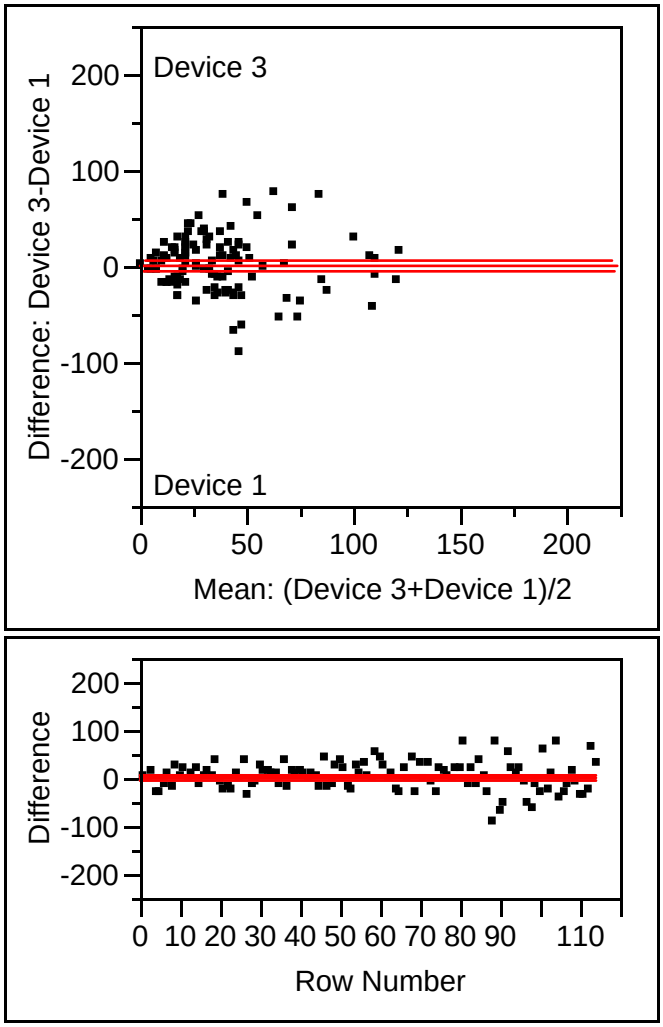

Device 3	39.3934	t-Ratio	0.711586
Device 1	37.4354	DF	113
Mean Difference	1.95807	Prob > |t|	0.4782
Std Error	2.7517	Prob > t	0.2391
Upper95%	7.40968	Prob < t	0.7609
Lower95%	-3.4935		
N	114		
Correlation	0.53169		

© SANS Institute 2006, Author retains full rights.


Difference: Device 3-Device 2

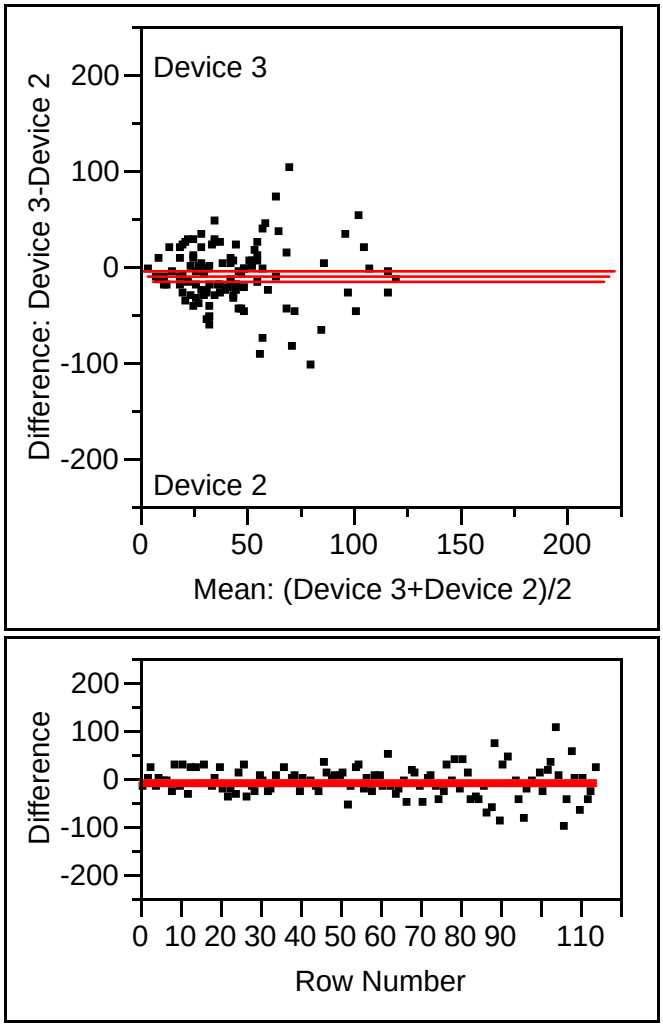

Device 3	39.3934	t-Ratio	-3.49948
Device 2	49.8094	DF	113
Mean Difference	-10.416	Prob > |t|	0.0007
Std Error	2.97643	Prob > t	0.9997
Upper95%	-4.5191	Prob < t	0.0003
Lower95%	-16.313		
N	114		
Correlation	0.43002		

© SANS Institute 2006, Author retains full rights.


Difference: Device 4-Device 1

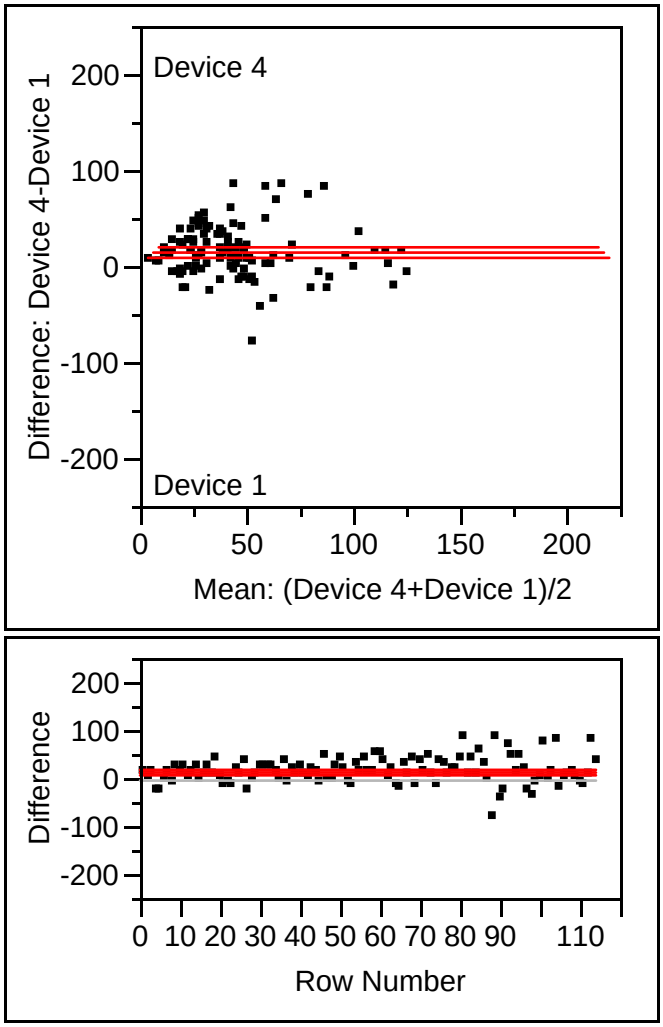

Device 4	52.0595	t-Ratio	5.804449
Device 1	37.4354	DF	113
Mean Difference	14.6241	Prob > |t|	<.0001
Std Error	2.51947	Prob > t	<.0001
Upper95%	19.6156	Prob < t	1.0000
Lower95%	9.6326		
N	114		
Correlation	0.60377		

© SANS Institute 2006, Author retains full rights.


Difference: Device 4-Device 2

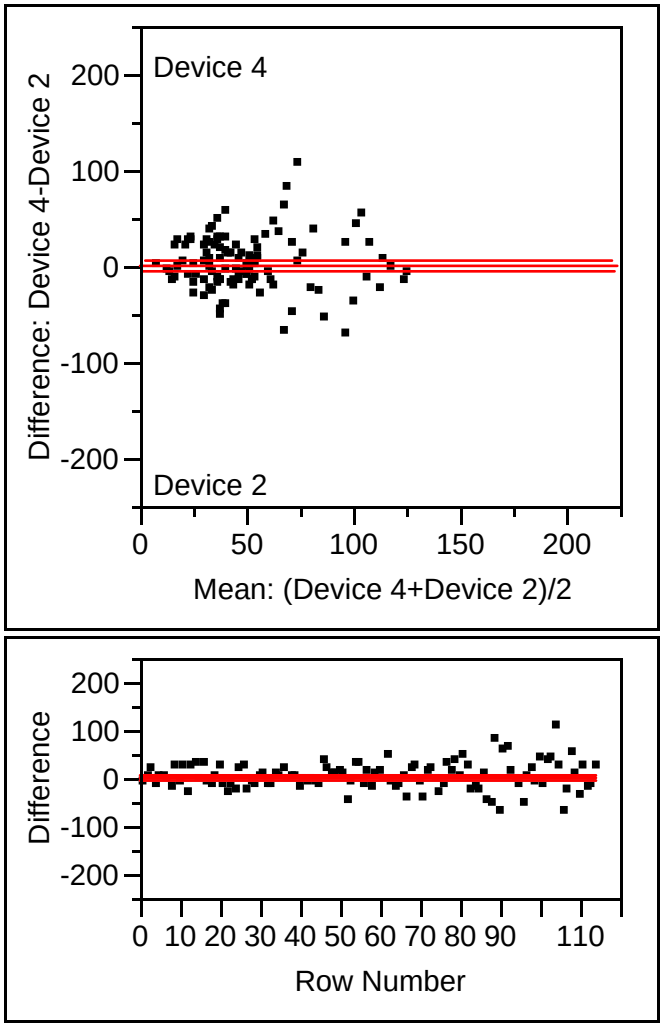

Device 4	52.0595	t-Ratio	0.849546
Device 2	49.8094	DF	113
Mean Difference	2.25009	Prob > |t|	0.3974
Std Error	2.64858	Prob > t	0.1987
Upper95%	7.4974	Prob < t	0.8013
Lower95%	-2.9972		
N	114		
Correlation	0.54381		

© SANS Institute 2006, Author retains full rights.


Difference: Device 4-Device 3

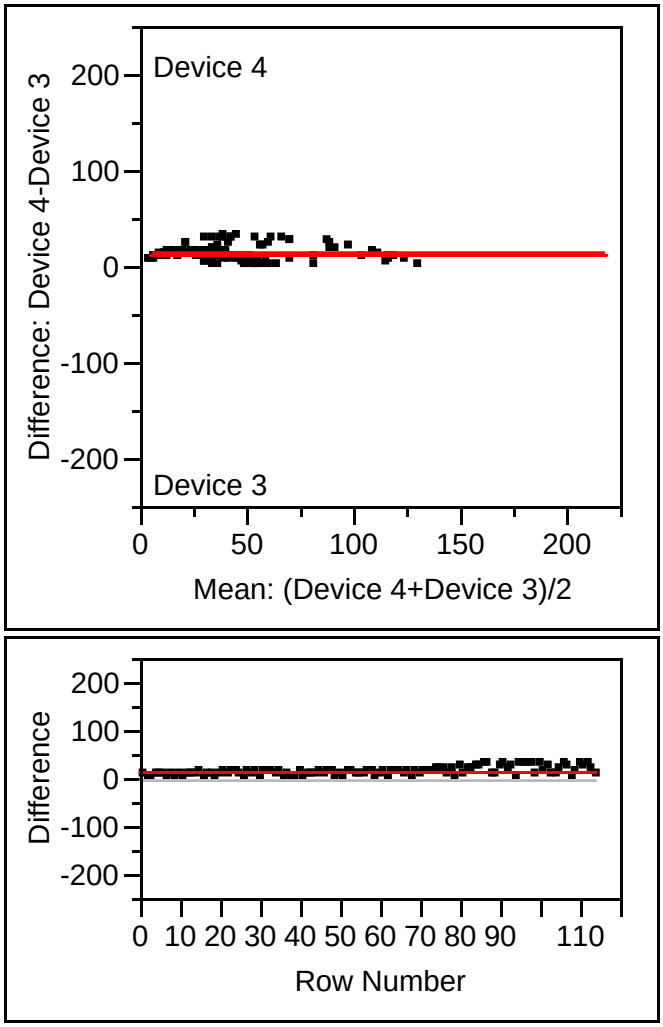

Device 4	52.0595	t-Ratio	16.14369
Device 3	39.3934	DF	113
Mean Difference	12.6661	Prob > |t|	<.0001
Std Error	0.78458	Prob > t	<.0001
Upper95%	14.2205	Prob < t	1.0000
Lower95%	11.1117		
N	114		
Correlation	0.95962		

© SANS Institute 2006, Author retains full rights.


Difference: Device 5-Device 1

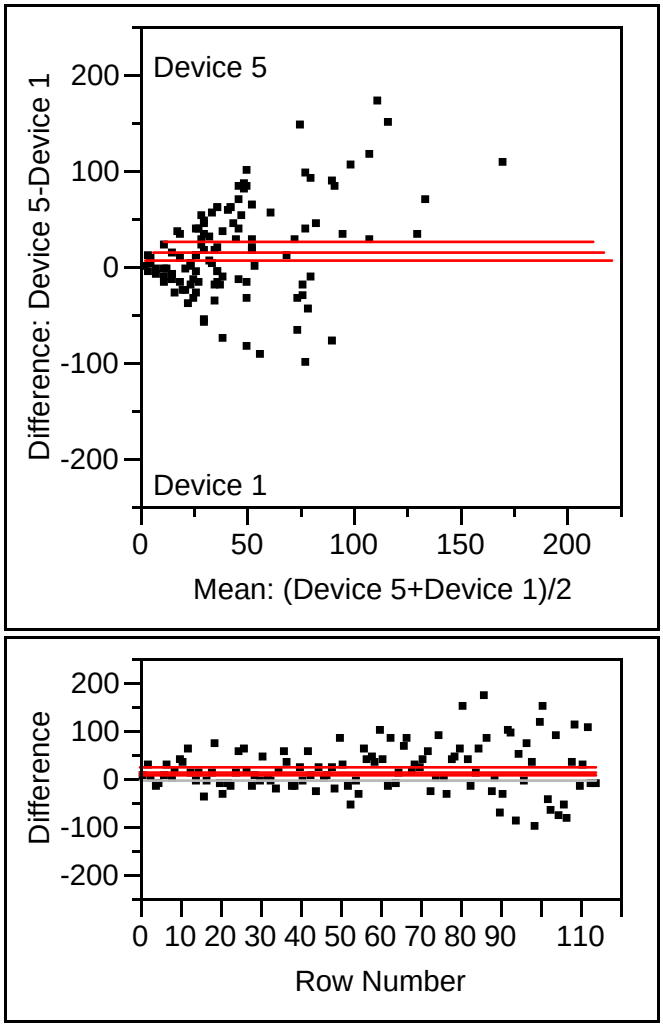

Device 5	53.5432	t-Ratio	3.430242
Device 1	37.4354	DF	113
Mean Difference	16.1078	Prob > |t|	0.0008
Std Error	4.69582	Prob > t	0.0004
Upper95%	25.4111	Prob < t	0.9996
Lower95%	6.80454		
N	114		
Correlation	0.23026		

© SANS Institute 2006, Author retains full rights.


Difference: Device 5-Device 2

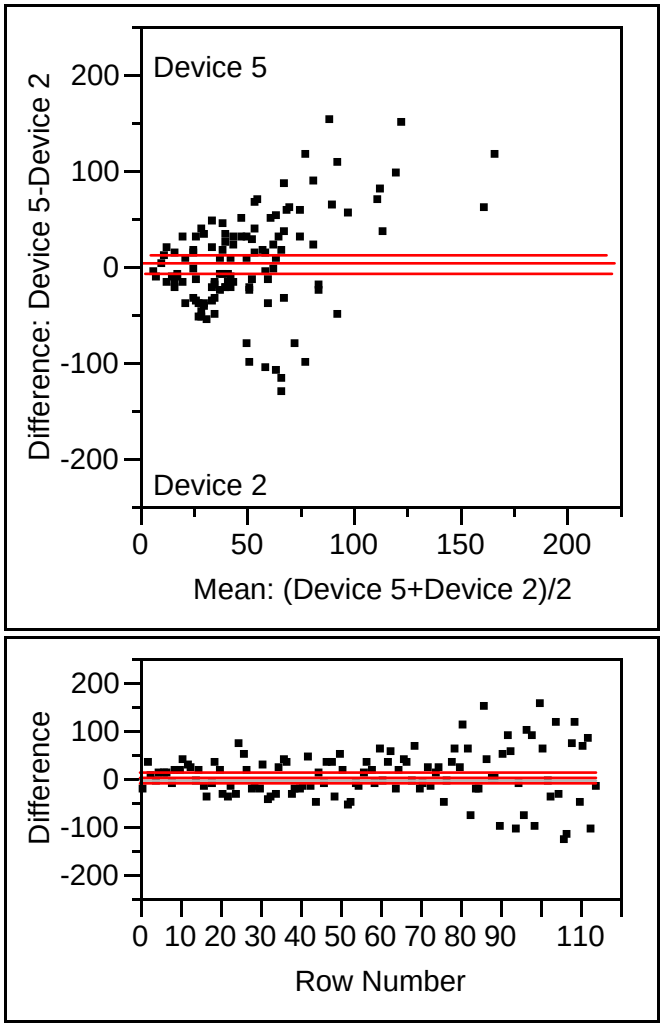

Device 5	53.5432	t-Ratio	0.767057
Device 2	49.8094	DF	113
Mean Difference	3.73377	Prob > |t|	0.4446
Std Error	4.86766	Prob > t	0.2223
Upper95%	13.3775	Prob < t	0.7777
Lower95%	-5.9099		
N	114		
Correlation	0.14809		

© SANS Institute 2006, Author retains full rights.

Difference: Device 5-Device 3

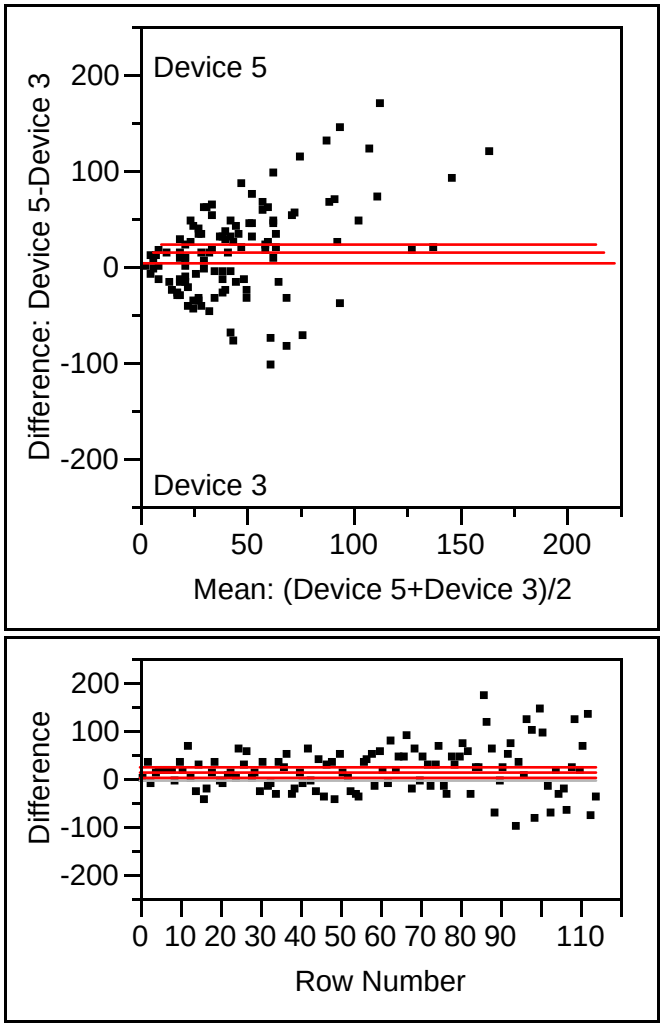


Device 5	53.5432	t-Ratio	3.151746
Device 3	39.3934	DF	113
Mean Difference	14.1497	Prob > |t|	0.0021
Std Error	4.48949	Prob > t	0.0010
Upper95%	23.0442	Prob < t	0.9990
Lower95%	5.25525		
N	114		
Correlation	0.28776		

© SANS Institute 2006,

Author retains full rights.


Difference: Device 5-Device 4

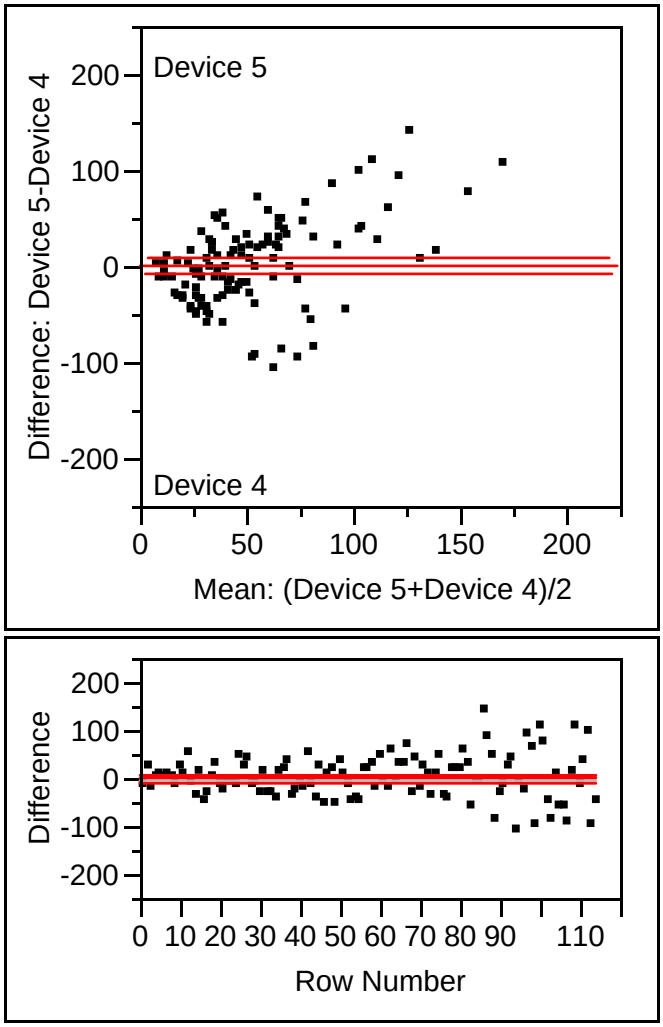

Device 5	53.5432	t-Ratio	0.351713
Device 4	52.0595	DF	113
Mean Difference	1.48368	Prob > |t|	0.7257
Std Error	4.21846	Prob > t	0.3629
Upper95%	9.84121	Prob < t	0.6371
Lower95%	-6.8738		
N	114		
Correlation	0.38138		


© SANS Institute 2006, Author retains full rights.

Time Series Device 1

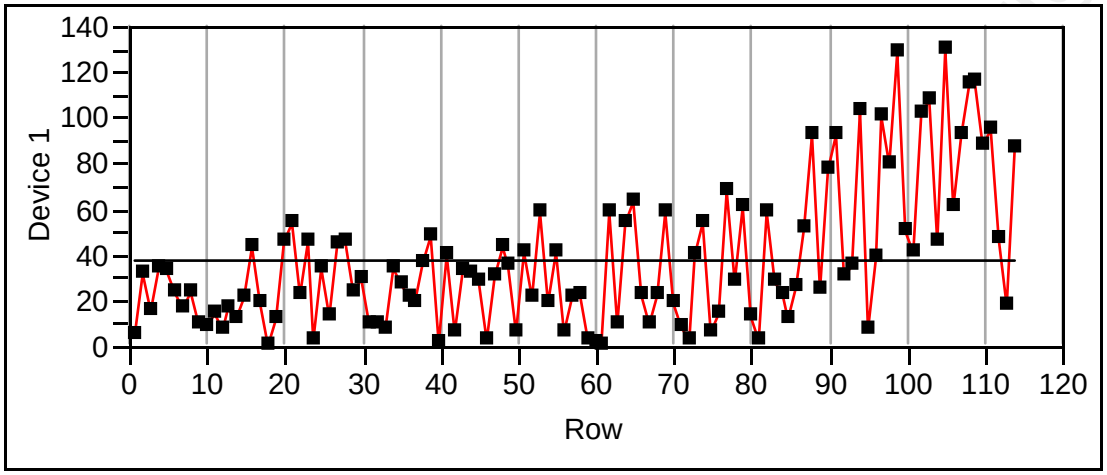

Mean	37.435351
Std	30.905543
N	114


Lag	AutoCorr
0	1.0000
1	0.3981
2	0.3921
3	0.4756
4	0.3987
5	0.3997
6	0.4311
7	0.2455
8	0.3310
9	0.4256
10	0.1934
11	0.3636
12	0.3015
13	0.1303
14	0.2355

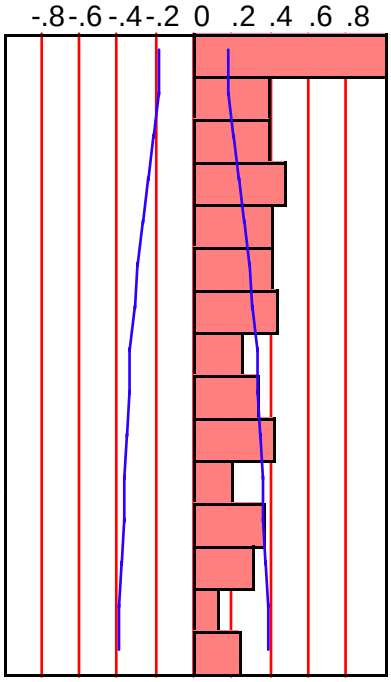


© SANS Institute 2006,

Author retains full rights.

Lag	Partial
0	1.0000
1	0.3981
2	0.2777
3	0.3249
4	0.1486
5	0.1334
6	0.1475
7	-0.1394
8	0.0363
9	0.1756
10	-0.1468
11	0.1619
12	-0.0077
13	-0.1785
14	-0.0239

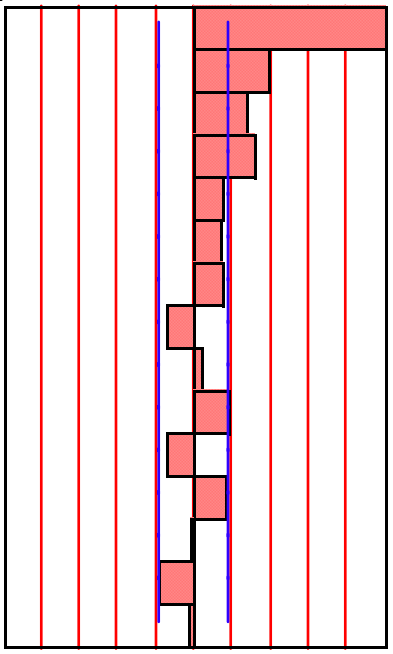



Lag	AR Coef
1	0.1739
2	0.1325
3	0.1632
4	0.1840
5	0.0911
6	0.0895
7	-0.1348
8	0.0196
9	0.2039
10	-0.1328
11	0.1854
12	0.0275
13	-0.1742
14	-0.0239

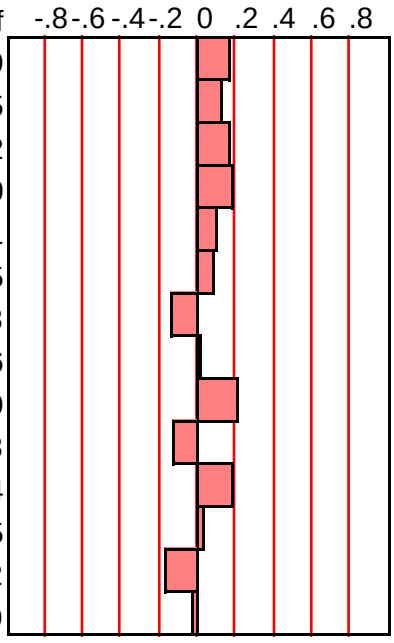

© SANS Institute 2006, Author retains full rights.

Spectral Density

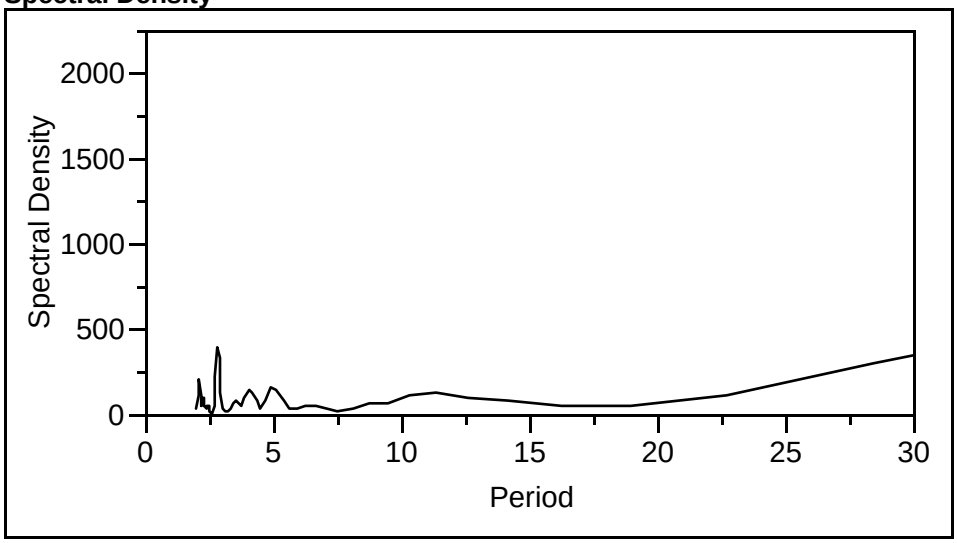

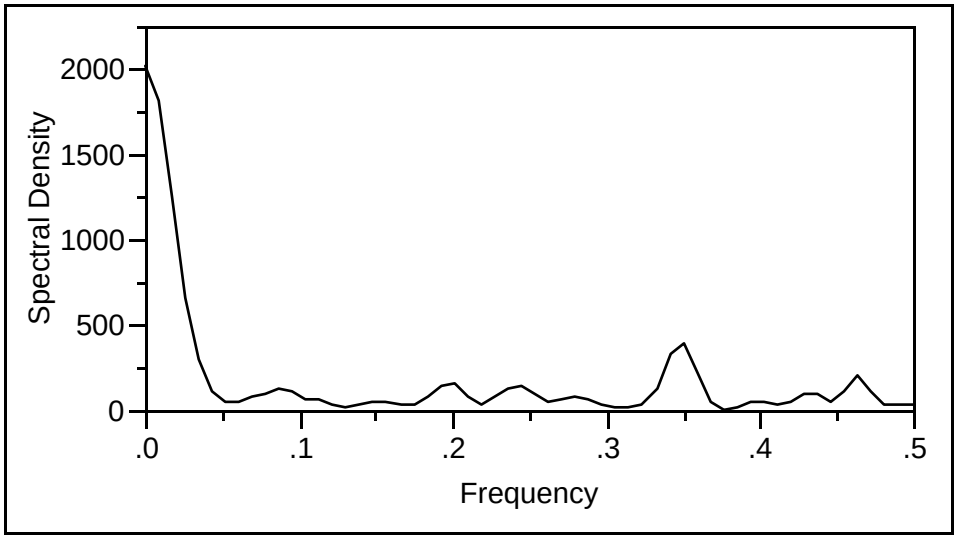


White Noise test

Fisher's Kappa	13.099152
Prob > Kappa	0.0000242
Bartlett's Kolmogorov-Smirnov	0.418624


© SANS Institute 2006, Author retains full rights.

Time Series Device 2

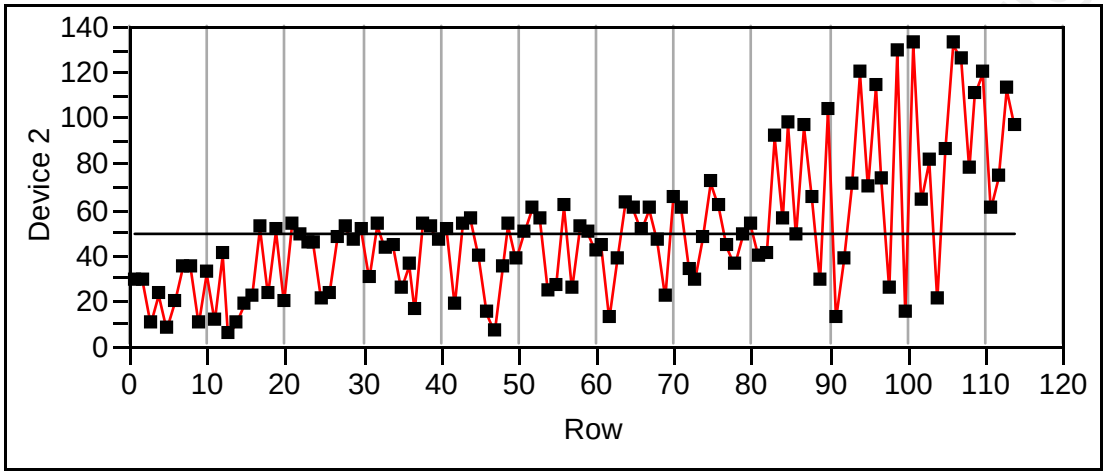

Mean	49.809386
Std	29.776896
N	114


Lag	AutoCorr
0	1.0000
1	0.3337
2	0.4419
3	0.3304
4	0.3869
5	0.3618
6	0.3035
7	0.4097
8	0.2537
9	0.3411
10	0.1799
11	0.4061
12	0.2958
13	0.2602
14	0.2017

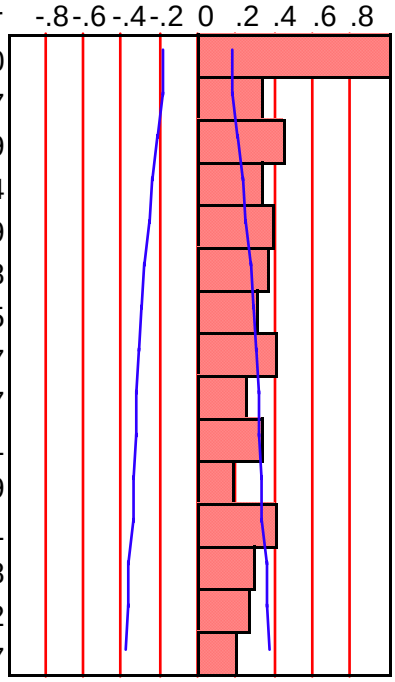


© SANS Institute 2006,

Author retains full rights.

Lag	Partial
0	1.0000
1	0.3337
2	0.3720
3	0.1484
4	0.1813
5	0.1472
6	0.0265
7	0.1883
8	-0.0349
9	0.0546
10	-0.1040
11	0.2052
12	0.0811
13	-0.0525
14	-0.0977

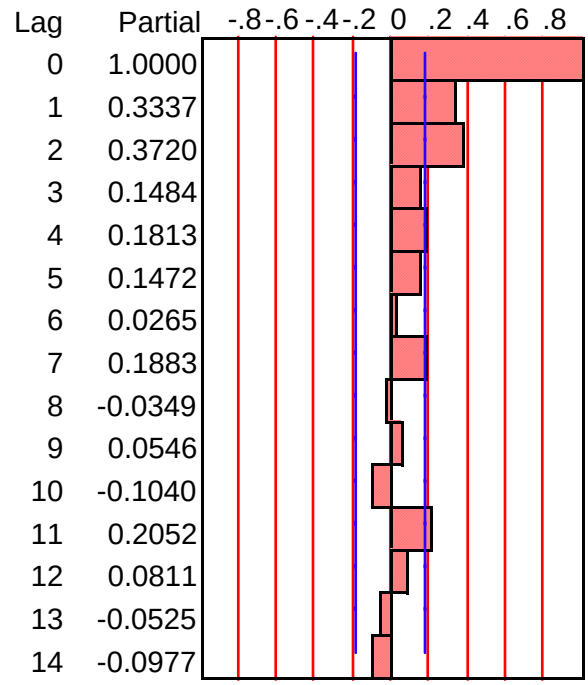


Spectral Density

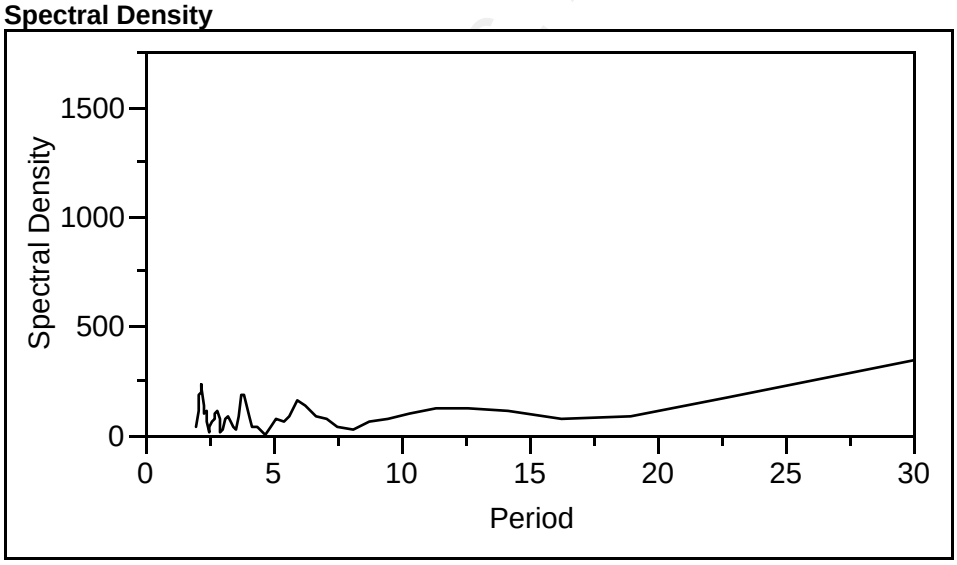

© SANS Institute 2006,


Author retains full rights.

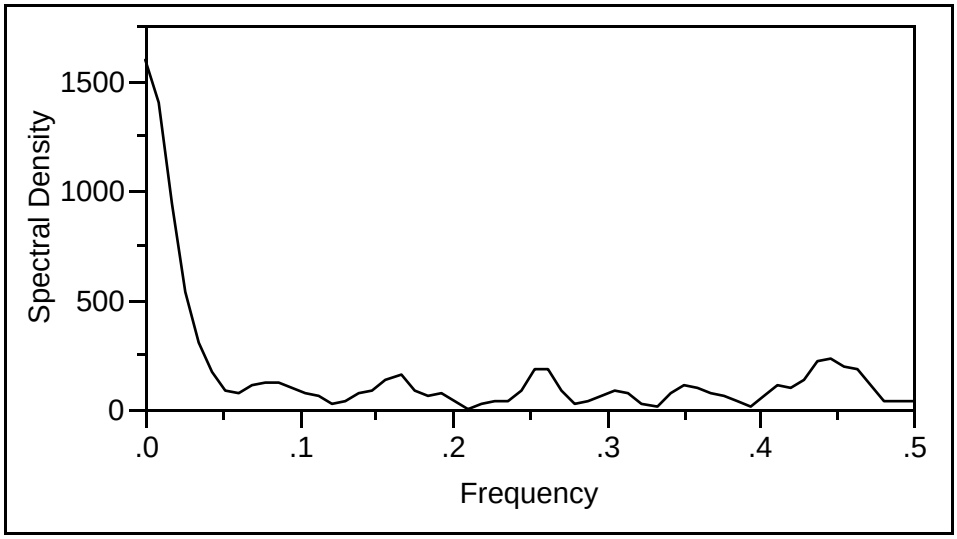

White Noise test

Fisher's Kappa	11.156033
Prob > Kappa	0.0002764
Bartlett's Kolmogorov-Smirnov	0.3501048


Time Series Device 3

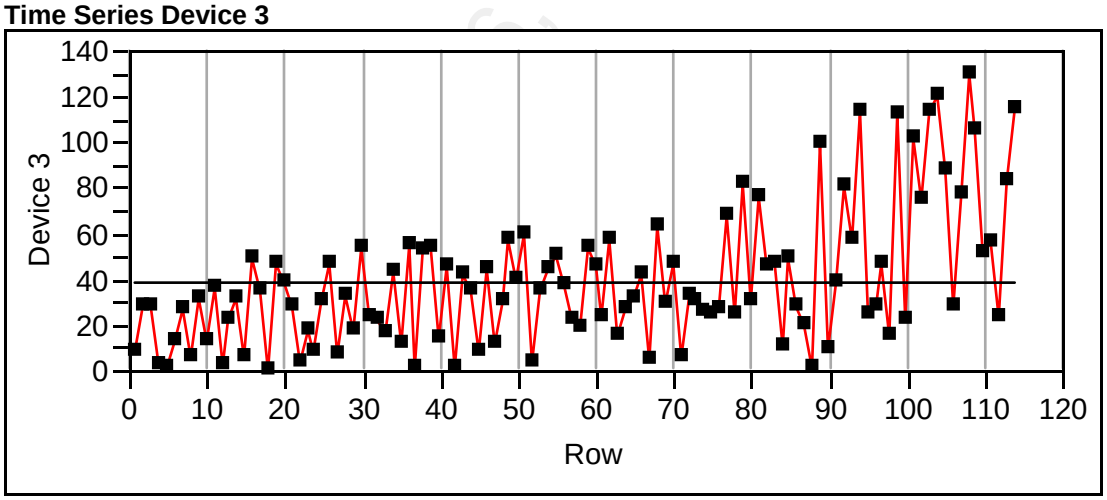


Mean	39.393421
Std	29.489137
N	114

© SANS Institute 2006, Author retains full rights.

Lag	AutoCorr
0	1.0000
1	0.2136
2	0.3683
3	0.2346
4	0.2937
5	0.4154
6	0.2476
7	0.1905
8	0.1761
9	0.2106
10	0.3704
11	0.1821
12	0.1786
13	0.1652
14	0.1073

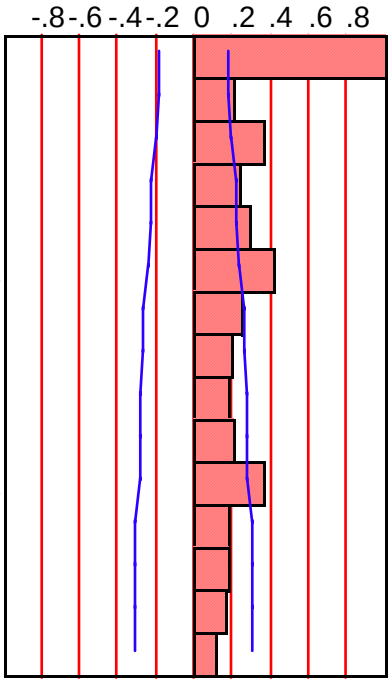



Lag	Partial
0	1.0000
1	0.2136
2	0.3381
3	0.1304
4	0.1508
5	0.3129
6	0.0617
7	-0.0949
8	-0.0301
9	0.0333
10	0.2170
11	0.0092
12	-0.0407
13	0.0271
14	-0.1123

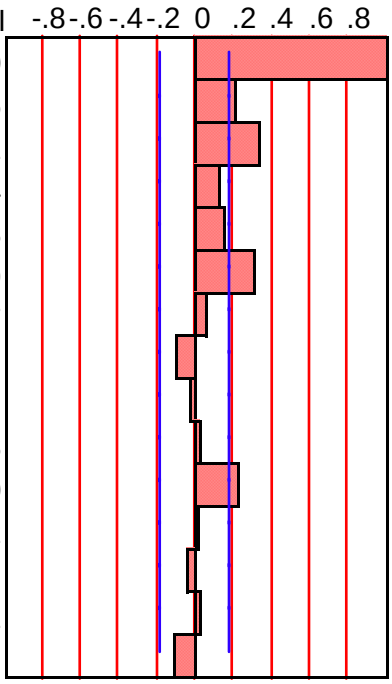

© SANS Institute 2006, Author retains full rights.

Spectral Density

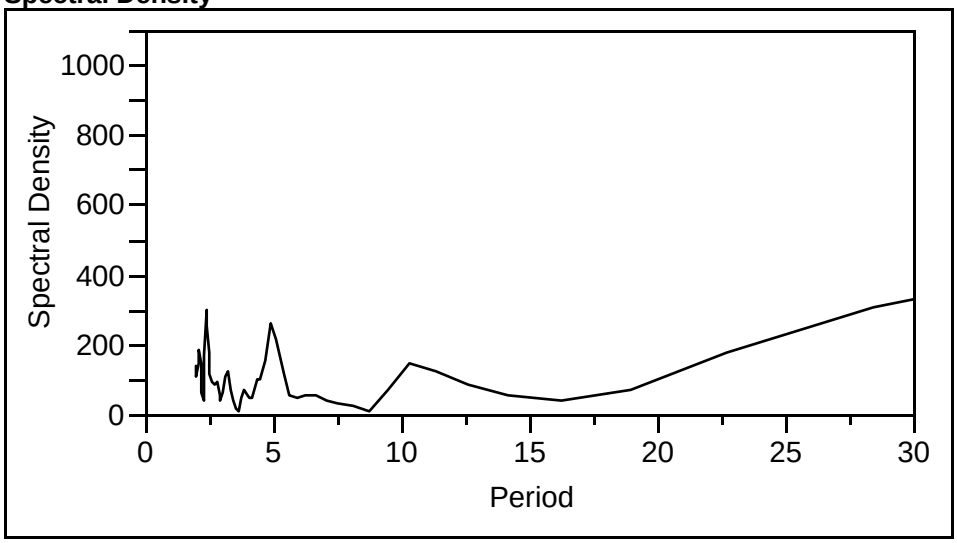

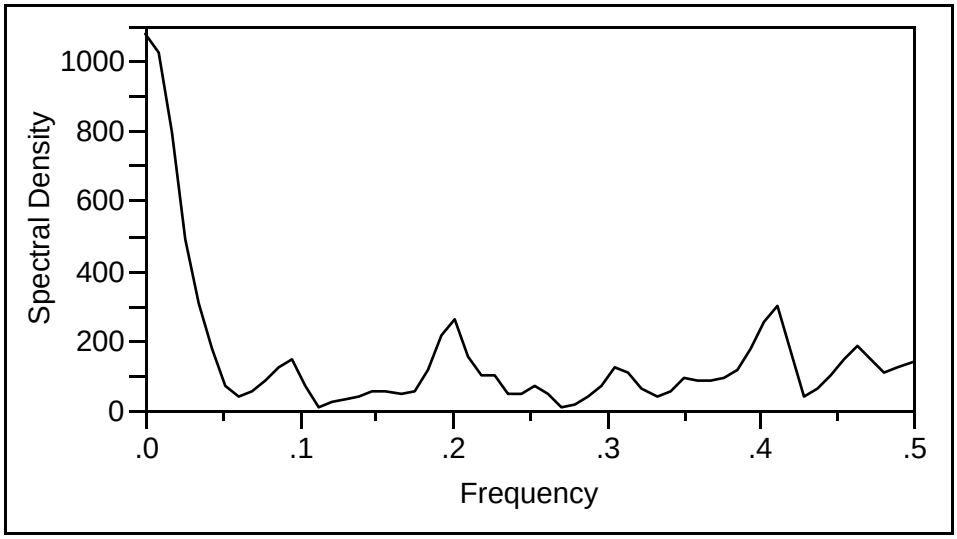


White Noise test


Fisher's Kappa	7.6978653
Prob > Kappa	0.0164113
Bartlett's Kolmogorov-Smirnov	0.2898514

© SANS Institute 2006, Author retains full rights.

Time Series Device 4

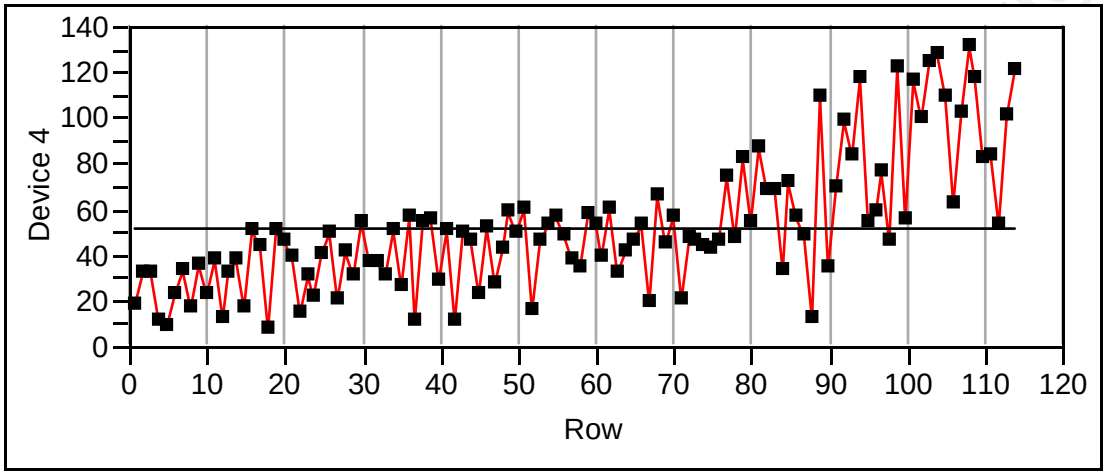


Mean	52.059474
Std	29.163549
N	114

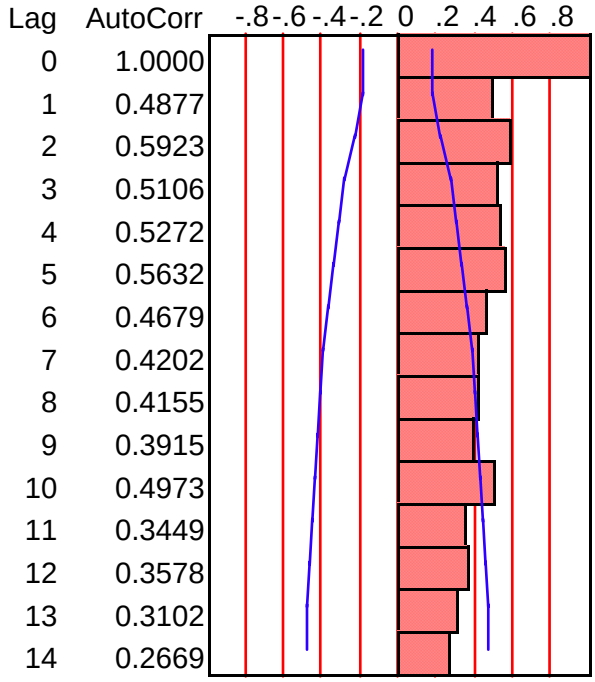


© SANS Institute 2006, Author retains full rights.

Lag	Partial
0	1.0000
1	0.4877
2	0.4651
3	0.2164
4	0.1718
5	0.2350
6	0.0215
7	-0.1049
8	-0.0250
9	-0.0102
10	0.2110
11	-0.0405
12	-0.0617
13	-0.0504
14	-0.1349

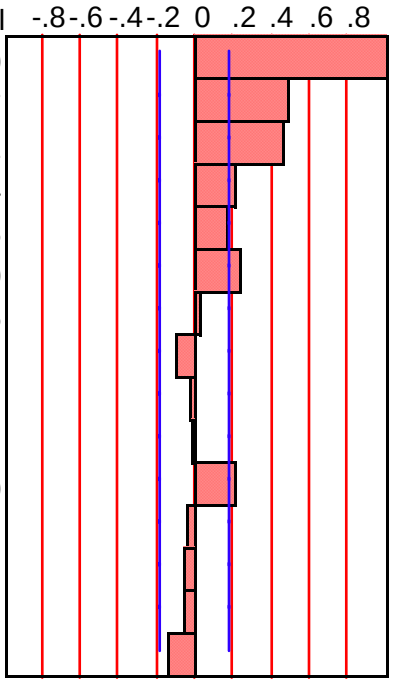


Lag	AR Coef
1	0.0753
2	0.3229
3	0.1541
4	0.1680
5	0.2010
6	0.0015
7	-0.1213
8	-0.0643
9	0.0294
10	0.2595
11	0.0027
12	-0.0128
13	-0.0393
14	-0.1349

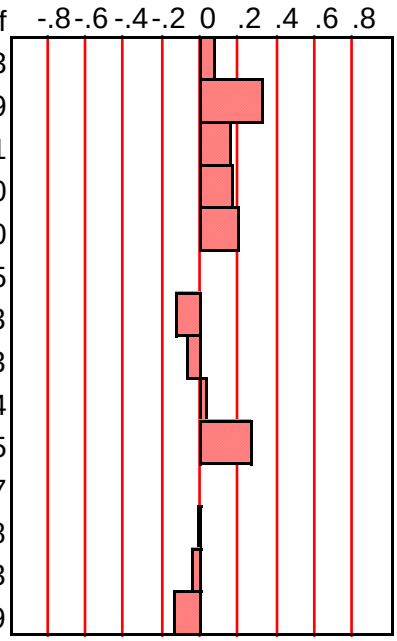

© SANS Institute 2006,

Author retains full rights.

Spectral Density

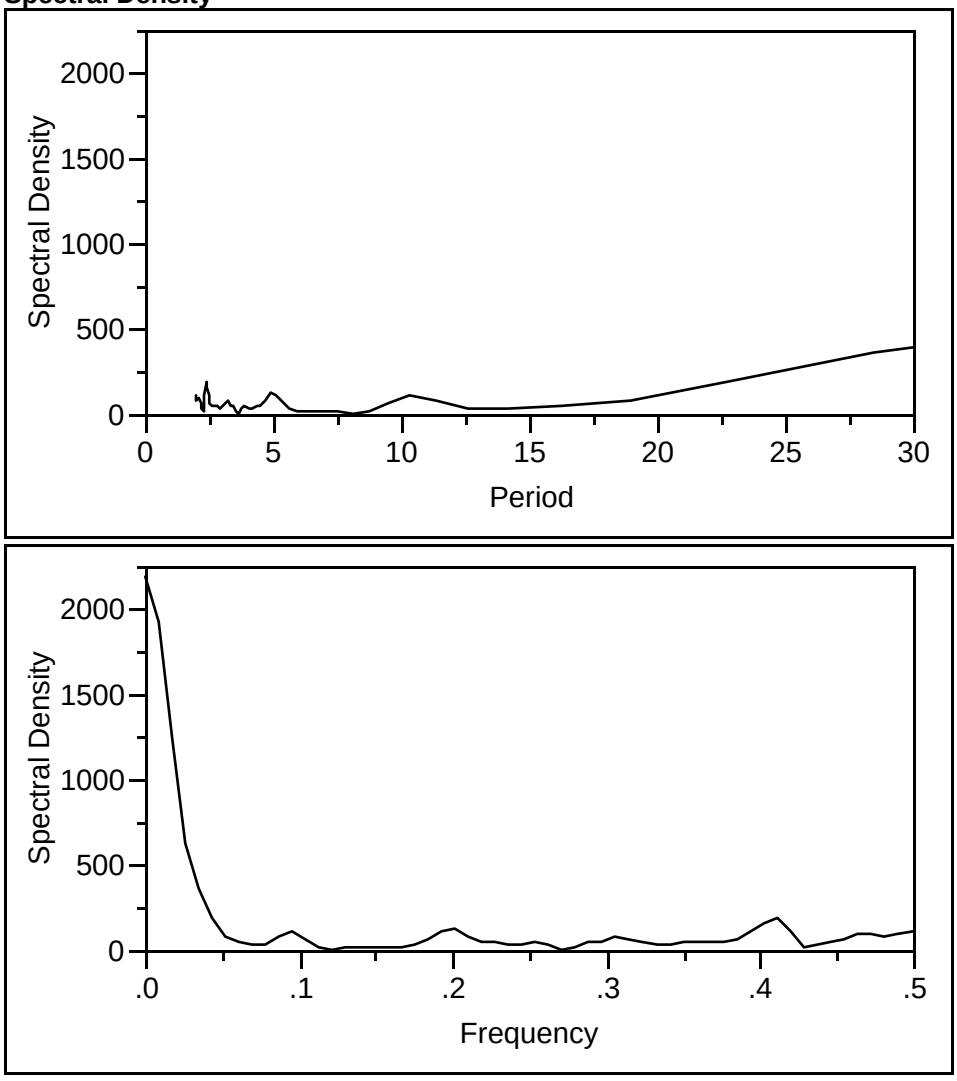


White Noise test

Fisher's Kappa	15.965443
Prob > Kappa	5.3923e-7
Bartlett's Kolmogorov-Smirnov	0.5026617


© SANS Institute 2006, Author retains full rights.

Time Series Device 5

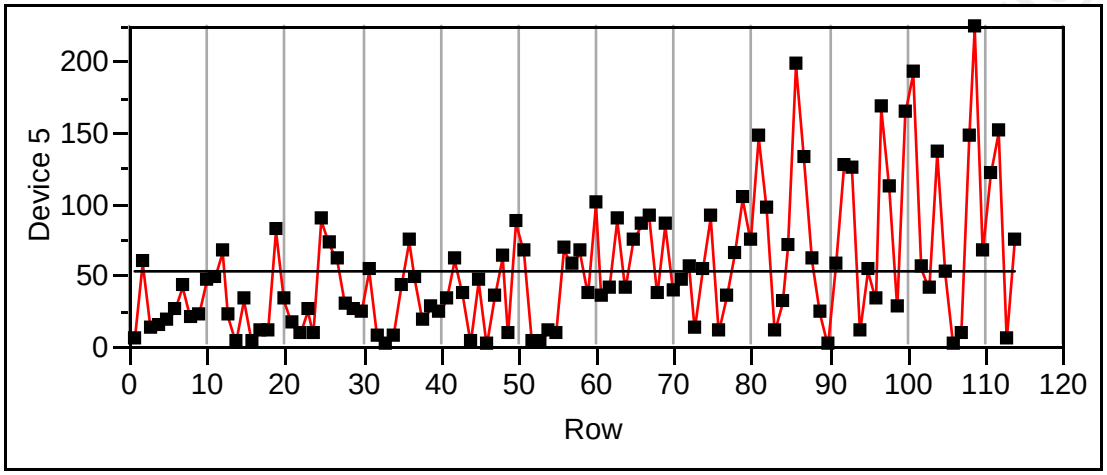


Mean	53.543158
Std	46.956261
N	114

Lag	AutoCorr
0	1.0000
1	0.3318
2	0.0153
3	0.1388
4	0.1575
5	0.1627
6	0.1853
7	0.2376
8	0.2260
9	0.0930
10	0.0773
11	0.3252
12	0.2702
13	0.0604
14	0.1565

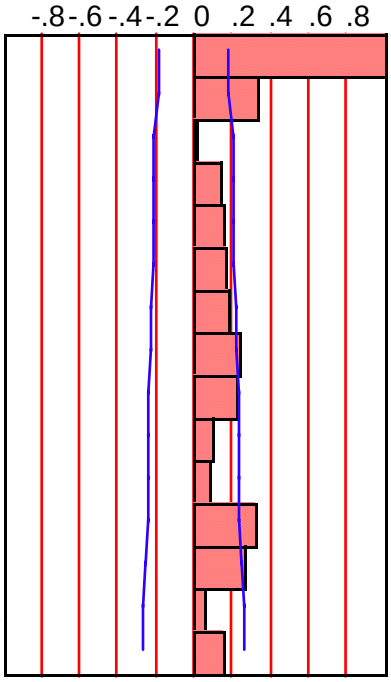


© SANS Institute 2006,


Author retains full rights.

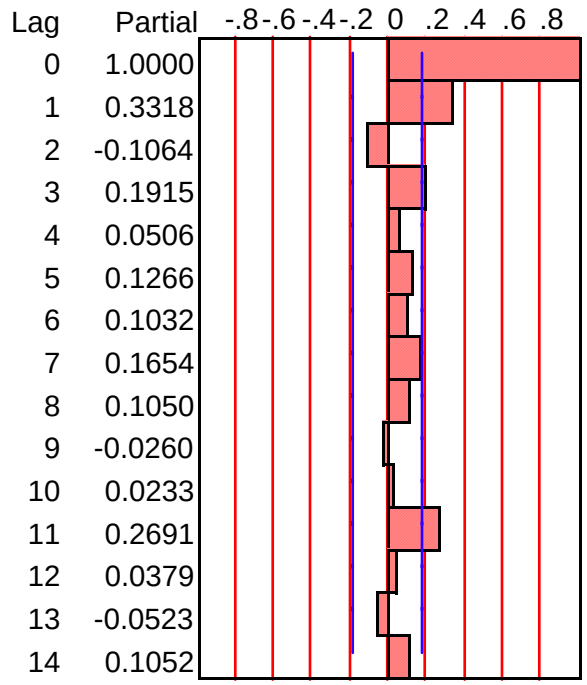

Spectral Density

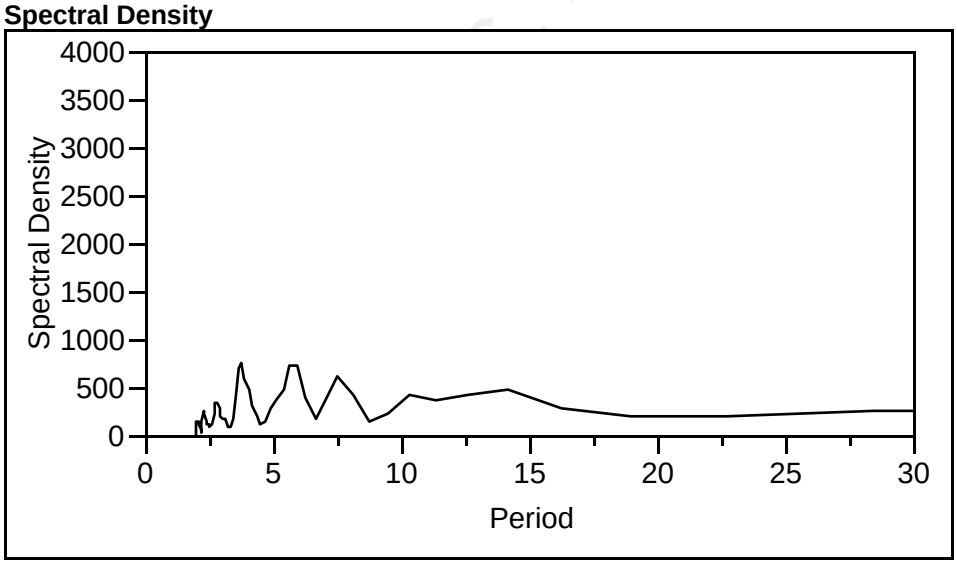

© SANS Institute 2006, Author retains full rights.

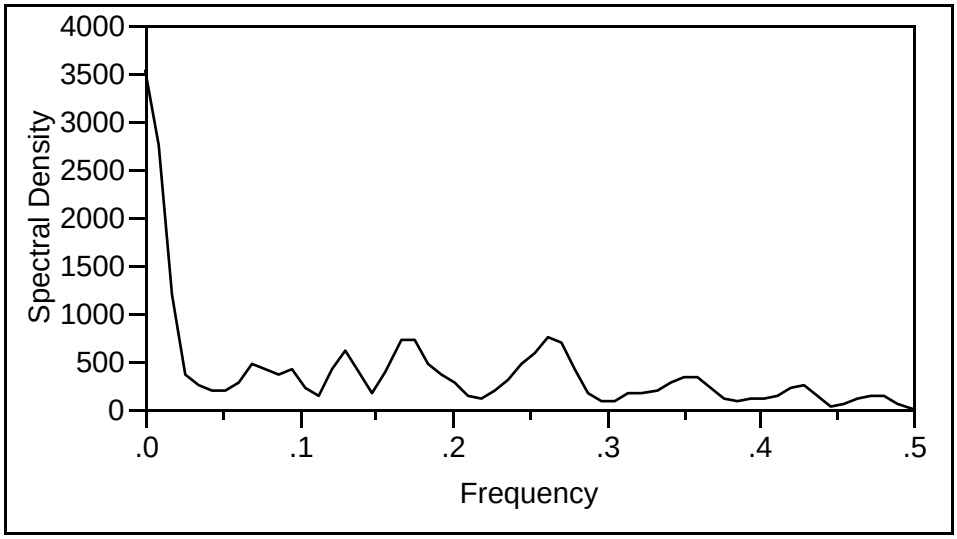


White Noise test

Fisher's Kappa	9.9355812
Prob > Kappa	0.0012104
Bartlett's Kolmogorov-Smirnov	0.236253

© SANS Institute 2006, Author retains full rights.


© SANS Institute 2006, Author retains full rights.

Variables Control Chart
XBar of Device 1

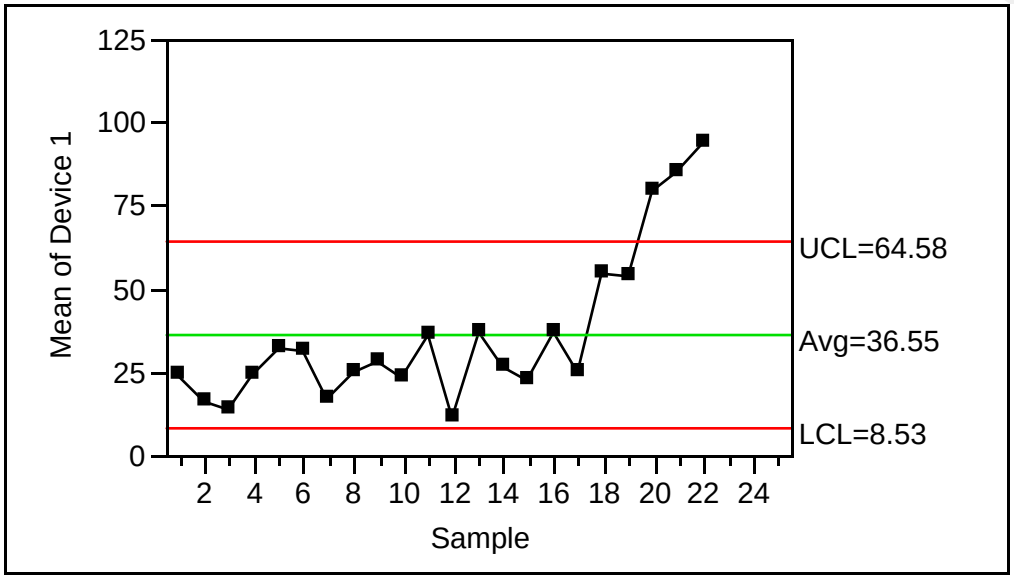

Note: Sigma used for limits based on range.


R of Device 1

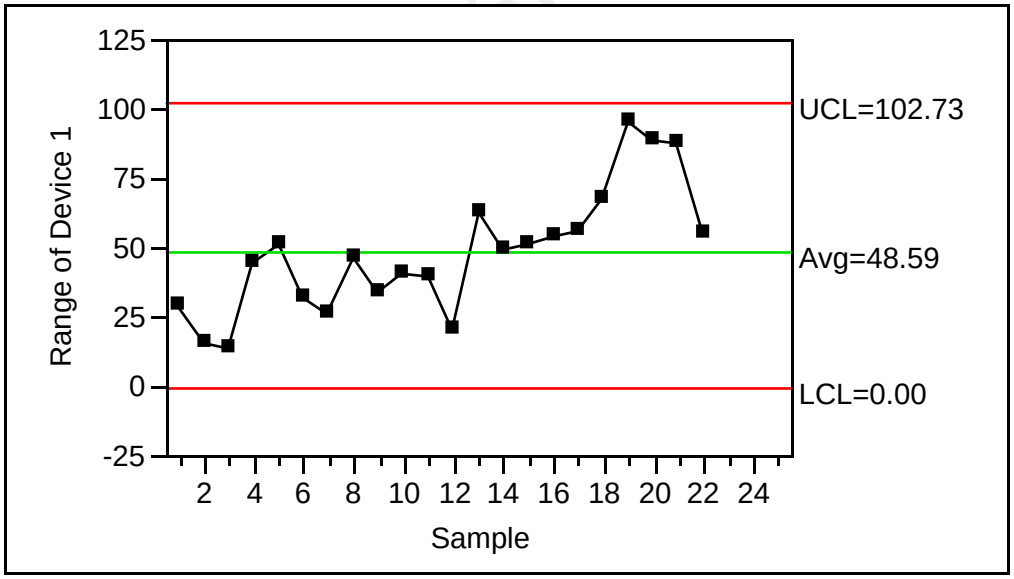

© SANS Institute 2006,


Author retains full rights.

XBar of Device 2

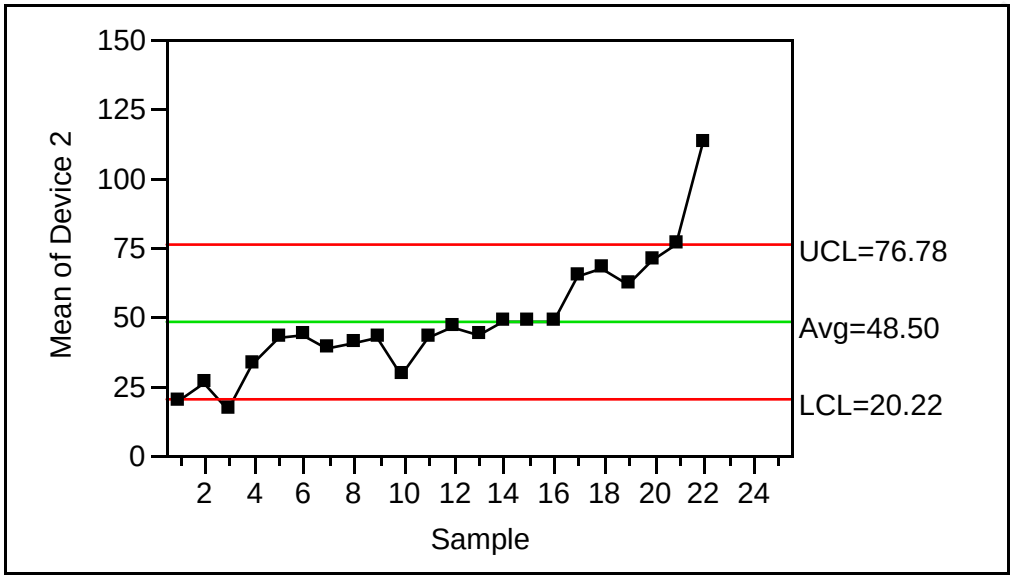


Note: Sigma used for limits based on range.

R of Device 2

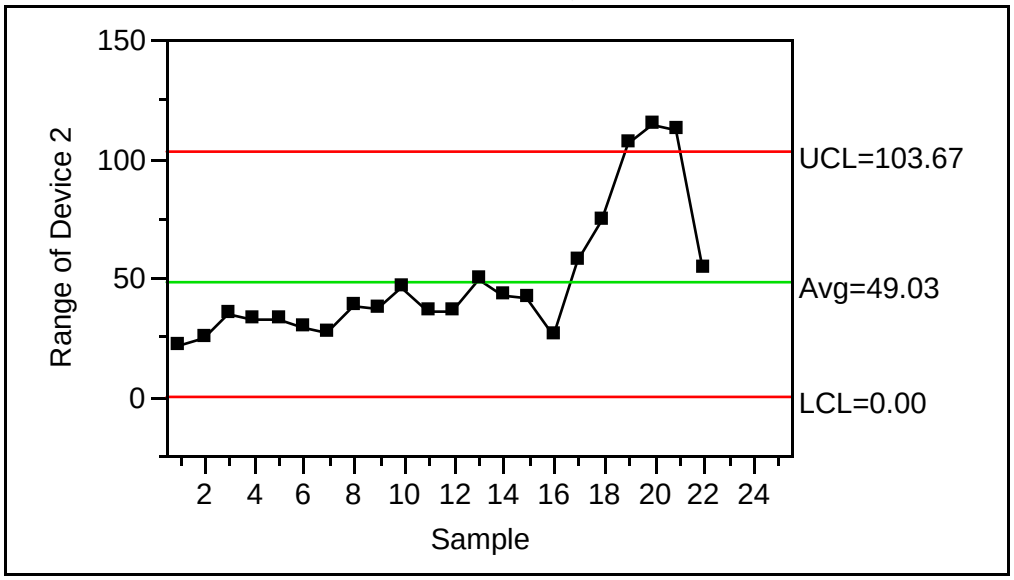


© SANS Institute 2006, Author retains full rights.

XBar of Device 3

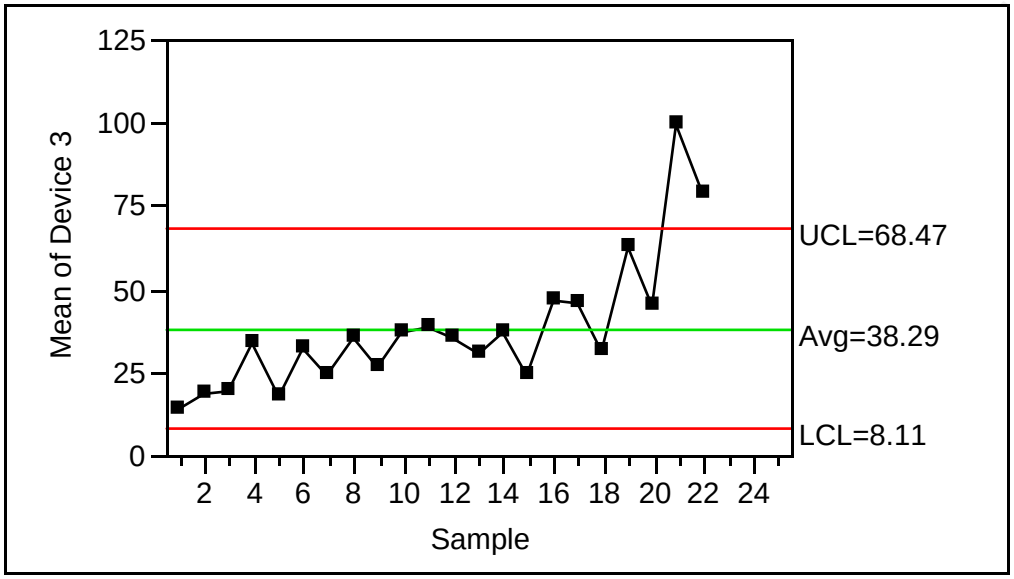

Note: Sigma used for limits based on range.


R of Device 3

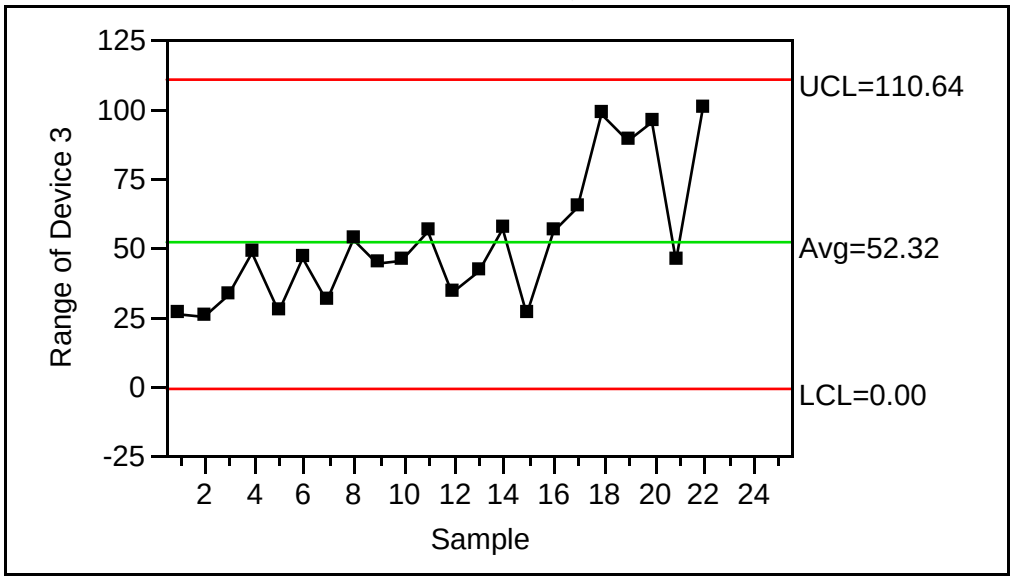

© SANS Institute 2006,


Author retains full rights.

XBar of Device 4

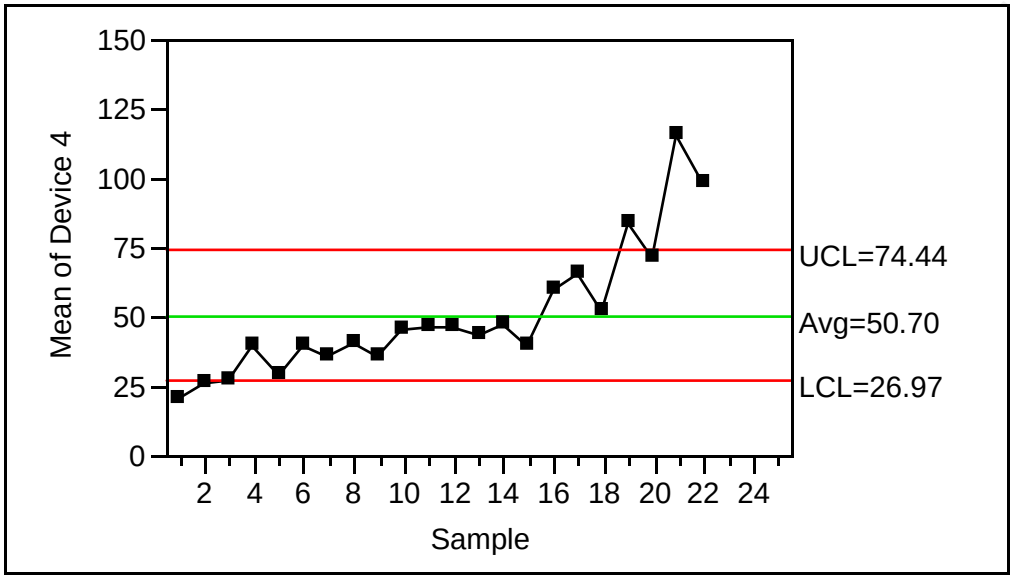


Note: Sigma used for limits based on range.

R of Device 4

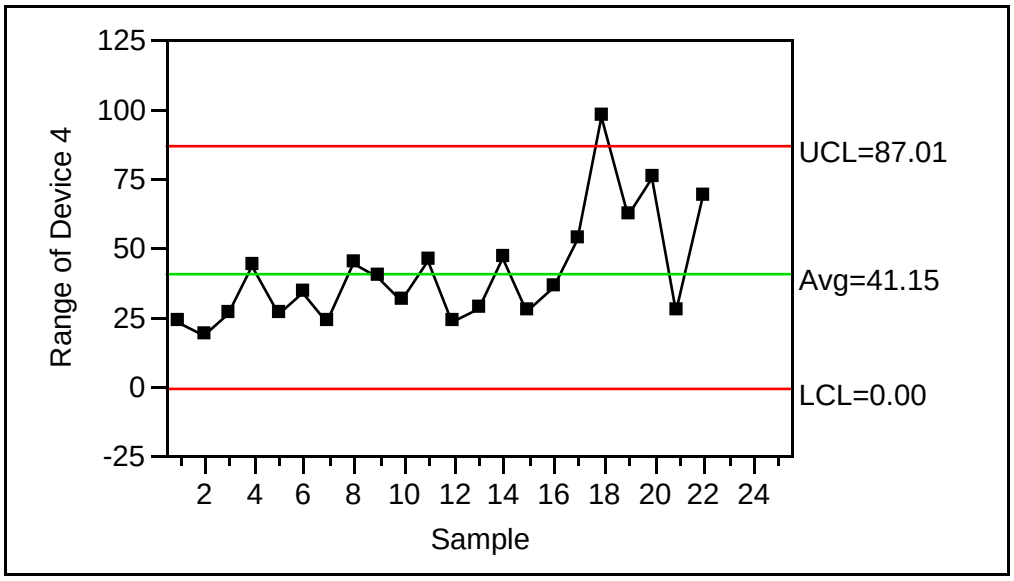


© SANS Institute 2006, Author retains full rights.

XBar of Device 5

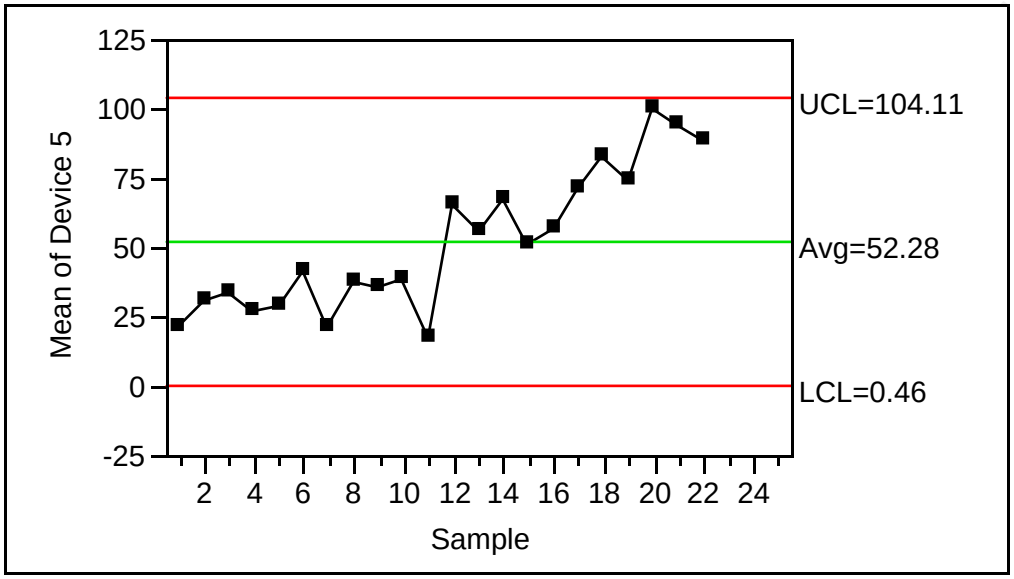

Note: Sigma used for limits based on range.

R of Device 5

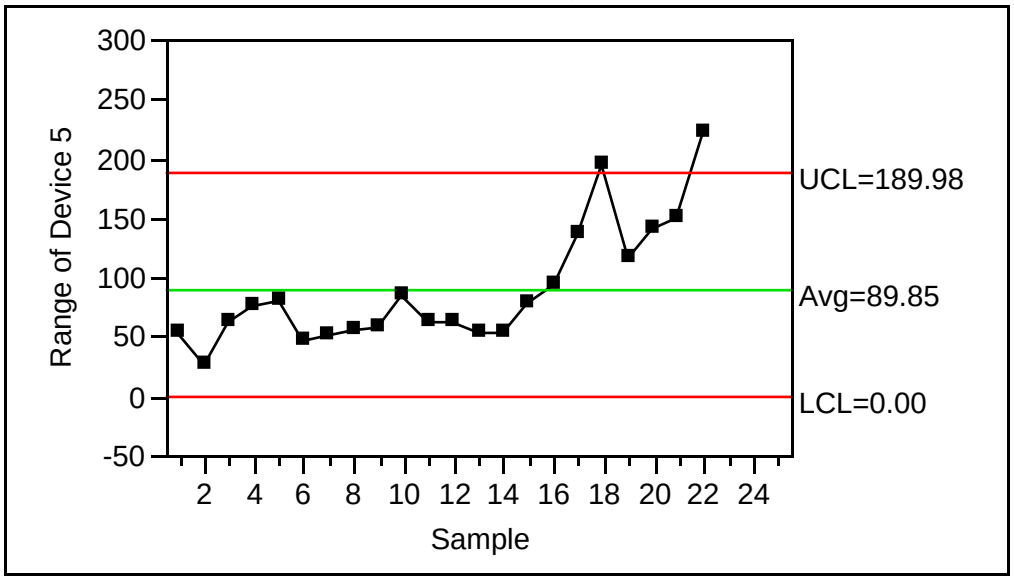

© SANS Institute 2006, Author retains full rights.