

Global Information Assurance Certification Paper

Copyright SANS Institute Author Retains Full Rights

This paper is taken from the GIAC directory of certified professionals. Reposting is not permited without express written permission.

Interested in learning more?

Check out the list of upcoming events offering "Security Essentials: Network, Endpoint, and Cloud (Security 401)" at http://www.giac.org/registration/gsec GIAC SECURITY ESSENTIALS CERTIFICATION (GSEC)

PRACTICAL ASSIGNMENT

VERSION 1.4B

OPTION #1, RESEARCH PAPER

INSTANT MESSAGE SECURITY – ANALYSIS OF CERULEAN STUDIOS' TRILLIAN APPLICATION

ΒY

MICHAEL D. MURPHY

JUNE 2003

TABLE OF CONTENTS

OVERVIEW OF THE UNDERLYING SECURITY RISKS OF INSTANT MESSAGING INSTANT MESSAGE ARCHITECTURE. 4 Security Limitations. 5 GENERAL SECURITY OPTIONS. 6 PRODUCT EXAMINATION – CERULEAN STUDIOS' TRILLIAN 6 Cerulean Studios' Trillian Version .74 6 Cerulean Studios' Trillian Pro Version 1.0 6	6
SECURITY LIMITATIONS	
Cerulean Studios' Trillian Version .74	
Cerulean Studios' Trillian Pro Version 1.0	7
TRILLIAN ENCRYPTION	7
DIFFIE-HELLMAN KEY EXCHANGE SYSTEM	
ANALYSIS OF ETHEREAL TRAFFIC	11
ANALYSIS OF STANDARD AOL IM NETWORK PACKETS 12 ANALYSIS OF TRILLIAN TO AOL IM NETWORK PACKETS 12 ANALYSIS OF TRILLIAN ENCRYPTION IM NETWORK PACKETS 13	
	14
TRILLIAN CAPABILITIES 14 TRILLIAN LIMITATIONS 14	
REFERENCES	16
ENDIX A: TRILLIAN ENCRYPTION - A COMBINATION OF DIFFIE-HELLMAN KEY EXCHANGE 128-BIT BLOWFISH SYMMETRIC KEY	17
ENDIX B: SCREEN PRINTS AND RESULTS OF SCENARIO TESTING	18
	Step 2 - Transfer Public Keys 7 Step 3 - Derive Shared Secret. 8 Step 4 - Transfer 128-bit Blowfish Symmetric Key. 8 Step 5 - Encrypt Data Using Symmetric Key. 9 TRILLIAN ENCRYPTION - 128-BIT BLOWFISH ENCRYPTION. 10 ANALYSIS OF ETHEREAL TRAFFIC 10 ANALYSIS OF STANDARD AOL IM NETWORK PACKETS 12 ANALYSIS OF TRILLIAN TO AOL IM NETWORK PACKETS 12 ANALYSIS OF TRILLIAN ENCRYPTION IM NETWORK PACKETS 13 RESEARCH FINDINGS 14 TRILLIAN LIMITATIONS 14 CONCLUSION 14 REFERENCES 14

I. Abstract

This paper outlines the underlying security risks of Instant Messaging (IM) focusing on an analysis of Cerulean Studios' Trillian application. There are several corporate offerings being released by the major IM providers, but the focus has been on providing a secure application for usage across the corporate Intranet with little to no integration with the public Internet. Cerulean Studios has focused its efforts on developing a secure IM application for usage across the Internet. Trillian is an IM application capable of simultaneously connecting to multiple IM services and is a secure option for corporations to use, allowing employees to collaborate securely via the Internet. Cerulean Studios has developed methods to encrypt IM for AOL and ICQ. This paper will examine the Trillian application in detail, analyze the methods of encryption designed into the application, provide a comparison of the underlying packets transmitted, and provide findings based on the overall research and analysis. Trillian has been widely accepted as a secure tool. This paper supports Cerulean Studios' claim that Trillian provides a secure option for both personal and corporate IM usage. The author of this paper is in no way affiliated with or compensated by Cerulean Studios.

II. Overview of the underlying security risks of Instant Messaging

Instant Messaging has become a low cost method of collaboration within many organizations. It is widely used in corporations across the United States as well as globally with significant evidence that shows usage to be increasing. The findings of Gartner Consulting in an analysis of Reuters, a financial information, technology, and news group, provide significant data points on the trends within IM in the corporate workplace. Reuters contracted Gartner to provide an analysis of the financial industry in the area of IM. The following bullet points highlight some of the key statistics derived in Gartner's analysis:

- 75% of financial institutions view improvements in collaboration as important to critical.
- Gartner predicts that by 2005, IM will be integrated into 50% of applications that directly interact with the customer.
- Over 50% of financial institutions are piloting IM within their organization.
- By 2003, free IM will be found in 70% of enterprises.
- Gartner views free IM as a risk for financial service organizations because of its vulnerabilities.

("Collaborative Technologies", 2002)

The statistics from Gartner consulting are significant in the fact that IM applications are making their way into a majority of corporations throughout the financial industry and the assumption can be made that IM applications are being used equally in other industries.


Because of this, it is important to analyze and understand the implications of IM both in productivity and potential risks to an organization's knowledge capital and network infrastructure. The security of most free IM tools has the potential for major negative impacts within an organization. Corporate employees must understand and embrace the tools that are select by the organization. In many cases individuals understand that most IM applications are not secure, yet sensitive information such as user names, passwords, IP Addresses, etc. is still transmitted. If an organization decides to use an IM application, initiatives must be taken to train employees on what should and should not be sent via the IM tool. Security professionals must ensure users understand the implications of using IM across the public Internet.

In addition to the security impact, the organization must look at the benefits IM can have on communication and collaborative work. IM speeds communications within many organizations as teams are able to collaborate on issues without picking up the phone, drafting and sending an email, or walking over to talk face-to-face with another team member. The ability to link employees across multiple work sites will drive productivity gains while it reduces overall telecommunications costs.

Each organization has a decision to make between security and productivity and must determine if it will embrace or ban IM. In either case, provisions will be required to either enforce the ban or train employees how to best use IM within the organization. In addition to training, security professionals will be expected to fully examine all viable IM options. This examination includes researching the capabilities and limitations of the Trillian application.

A. Instant Message Architecture

The Instant Messaging architecture (Figure 1) is representative of a traditional client/server network. The diagram depicts the basic overall architecture of an IM network. In the diagram, there are three major providers in the IM world: AOL, MSN, and Yahoo. Users have a client application installed locally that communicates with the proprietary servers each vendor manages. These servers are used to facilitate connections with other members of that specific service. When connected, the users can see other users who are actively connected and send them brief text messages. The individual vendor client software is not compatible with other vendors. This has made IM a challenge as a standard means of communications. A user can only connect to the specific vendor server using traditional vendor provided software. Cerulean Studios' Trillian application was created to be a single point of entry into a user's various IM accounts. Using Trillian allows the user to setup and connect to all major providers using a single application. This is a highly advantageous feature, as it allows users to collaborate and communicate through AOL, MSN, and Yahoo simultaneously from a single application, with no impact on functionality. Overall, the secure IM feature available in Trillian makes it more secure than the software provided by the individual vendors.

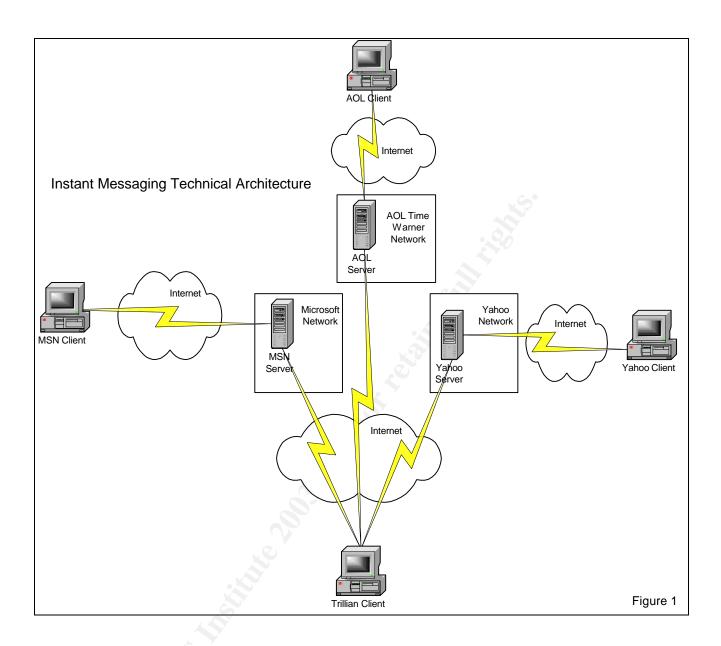

B. Security Limitations

Within the architecture in Figure 1, it is evident that the main security limitations exist in the lack of encryption to mask the data being sent between the client and server. All data is passed in plain text packets that have the potential to be hacked by malicious users. This is a limitation in the main IM providers' client applications. Even so, the ease of use and functionality has increased the demand and implementation of IM tools in the workplace. Cerulean Studios has taken action to mitigate the vendor specific security risks using encryption. In subsequent sections, the encryption incorporated into the Trillian application will be detailed.

C. General Security Options

As displayed in Figure 1, the three top IM providers are AOL, MSN, and Yahoo. Each of these organizations is approaching the security limitation, by providing a corporate solution housed on the corporate Intranet avoiding the potential issues of the public network. This is effective when communications within the organization are focused internally. In situations where employees are distributed outside the corporate infrastructure (i.e. consulting at the client site), this approach will not work without a method to filter IM to and from users on the public Internet. These options have been slow to meet the needs of corporate clients. In the case of IM using AOL, Trillian has risen as an application that can add the necessary security while still providing access to users outside the corporate Intranet.

III. Product Examination – Cerulean Studios' Trillian

Cerulean Studios was founded in May of 1998 by Kevin Kurtz and Scott Werndorfer. The first version of Trillian was released July 1, 2000. The office of Cerulean Studios is located in Connecticut ("Cerulean Studios' Home", 2003). Cerulean Studios promotes and distributes two versions of Trillian at this time. The free version being distributed is version .74. The latest release of Trillian with additional functionality and features is Trillian Pro version 1.0. This version has a small distribution cost, but adds functionality through the addition of plugins. Currently, both versions provide the same level of security.

A. Cerulean Studios' Trillian Version .74

Trillian version .74 is the free version of Trillian provided by Cerulean Studios. The version can be used to integrate AOL, MSN, ICQ, Yahoo, and IRC into one tool. Version .74 tracks conversations using simple text logs. Individual files are saved for each buddy in a user's buddy list. These text files can be accessed easily to review information previously communicated. Trillian is integrated with Windows in a manner where one can drag files into a message window to initiate a file transfer. This version provides secure IM using a combination of the Diffie-Hellman key exchange and 128-bit Blowfish encryption. This encryption capability is limited to AOL and ICQ type messages ("Cerulean Studios' Trillian version", 2003).

B. Cerulean Studios' Trillian Pro Version 1.0

Trillian Pro version 1.0 includes all the features of version .74 with extended capabilities made available via add-on plugins with a cost of \$25/person. The architecture currently allows for third party developers to create compatible plugins for Trillian Pro. The plugins available include AccuWeather[™], POP-3, World Time Clock, Popup Notifications, News, as well as IM Forwarding. Cerulean Studios states that there are over 100 enhancements to the Trillian Pro version. However, in the area of security via

secure IM, there have not been any enhancements. The other enhancements are not security based features, so overall the two versions are consistent in the level of security they provide to the user ("Cerulean Studios' Trillian Pro", 2003).

IV. Trillian Encryption


Trillian version .74 and 1.0 both support Secure Instant Messaging for AOL and ICQ. This is a key feature of Trillian that must be examined in order to validate whether Trillian truly supports sending secure IM across the public Internet. Trillian uses a combination of the Diffie-Hellman key exchange with 128-bit Blowfish Encryption in order to secure AOL and ICQ forms of messaging. This combination provides Trillian user to another. Both the source and destination user must use Trillian in order for a secure link to be established.

A. Diffie-Hellman Key Exchange System

The Diffie-Hellman key exchange system was publicly introduced in 1976 by Whitfield Diffie and Martin Hellman. It was the first system to use a "public key" or "asymmetrical" key (Palmgren, 2003). An asymmetrical key is unique for each user, but mathematically can be used to derive a common key. The procedures used in the Diffie-Hellman key exchange are provided in Figures 2 - 6. The process is diagramed in the most basic method with integration of how it is used in the Trillian application. The key exchange uses modular mathematics to derive the shared secret key and is depicted by the mathematical operator icon in the process flow in Figure 4. The six steps of the process are as follows:


Step 1 – Generate Public and Private Keys

Both User A and User B create private keys. From their private key they create a public key. At this point all keys are unique, but mathematically will be used to derive a shared key, which is identical for both User A and User B.




Step 2 – Transfer Public Keys

User A transfers his public key to User B. User B transfers his public key to User A. Each user now has their private key and the other user's public key.




Step 3 – Derive Shared Secret

Each user derives the common shared secret key by running a mathematical operation against their private Key and the other user's public Key. The mathematical operation results in an identical shared secret key which will be used by both users to transfer the symmetrical key which is detailed in Step 4.

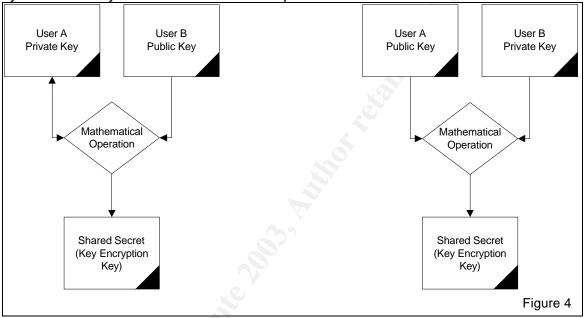


Step 4 – Transfer 128-bit Blowfish Symmetric Key

The symmetrical key is then used to pass data. Using a symmetrical key for the actual data transfer allows for quicker encryption and decryption within the system. Trillian uses 128-bit Blowfish encryption for its symmetrical keys. In this step, the symmetrical key is passed from User A to User B. The shared secret key facilitates the secure transmission of the 128-bit Blowfish symmetric key.

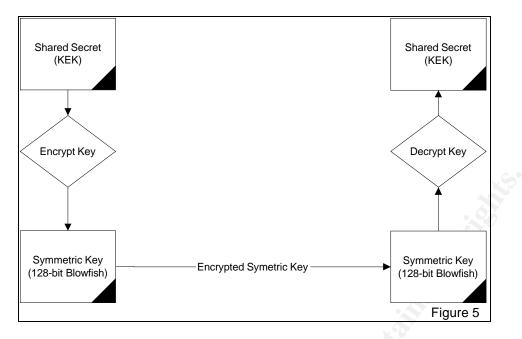

Step 5 – Encrypt Data Using Symmetric Key

At this point a secure 128-bit symmetric key has been passed between User A and User B. The symmetric key is used to encrypt and decrypt all data transmissions between User A and User B.

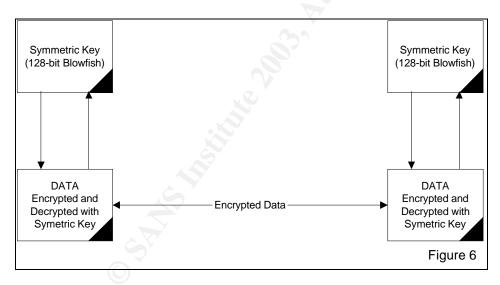

⁽Palmgren, 2003).

The Diffie-Hellman key exchange primary limitation is in a susceptibility to man-in-themiddle attacks. This type of attack occurs in the following manner:

- User A sends his public key to User B, User C intercepts the key and sends his public key to User B instead.
- Upon receiving the key, User B sends his public key back to User A. User C intercepts the key and sends his key to User A.
- User A and User C agree on one shared key, while User B and User C agree on another shared key.
- After this, User C decrypts any message sent out by User A or User B, reads and modifies them, re-encrypts them with appropriate shared key and sends them to the perspective user.

("3.6.1 What", 2003)

This traditional limitation can be resolved by incorporating digital certificates and the station-to-station protocol. In the case of Trillian, users connect via authentication to the IM vendor specific servers. A specific user is selected to start a Secure IM session and an assumption is made that the individual logged in is that particular user. At this time, the Diffie-Hellman process begins. Under these conditions a man-in-the-middle attack is less likely. It would be more likely for someone to crack a user's password and attempt to impersonate a user, than to try to act as a middle man.


The Diffie-Hellman key exchange process has been in existence for over 25 years. Outside the man-in-the-middle attack, this process has stood the test of time. It is widely used and accepted in the industry as a leader in securely passing keys.

B. Trillian Encryption – 128-bit Blowfish Encryption

Trillian uses 128-bit Blowfish symmetrical keys for data transmission. Symmetrical keys are used instead of asymmetrical keys, because they provide faster data transmission. Also, encryption and decryption of data takes place more effectively than in a system with asymmetrical keys.

Blowfish is a block cipher designed in 1993 by Bruce Schneier as a fast and free alternative to existing encryption algorithms. Blowfish has been analyzed for the past 10 years and no significant weakness has been found in the algorithm. Because of its strength it has been implemented in over 130 commercial applications. Blowfish uses a 64-bit block cipher which means it encrypts and decrypts data in chunks of 64-bits. The key length varies from 32 to 448 bits. Trillian uses a 128-bit key length ("Blowfish Encryption", 2003).

A block cipher such as Blowfish can be explained in simple terms through Figure 7. The block cipher uses a mathematical computation in order to transform the Plaintext Block and the Key into a Ciphertext Block output ("Block Cipher", 2003). The mathematical process is significantly complex in nature. In general, the algorithm consists of a data-encryption piece that converts the 128-bit key into several sub key arrays. Data-encryption occurs via 16 passes through the complex set of key and data-dependent substitutions and permutations (Schneier, 2003).

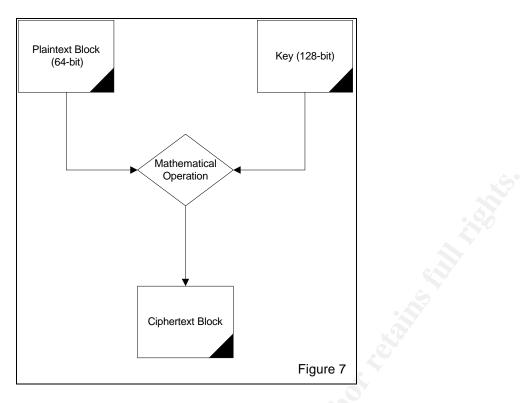

Although effective in encrypting and decrypting the data, a larger key would prove more valuable and secure. The larger the key, the more difficult it would be to crack, so it is recommended that Trillian move to a larger key at some point.

V. Analysis of Ethereal Traffic

An analysis of the underlining packets between AOL IM communications using the AOL client application and Trillian provides the highest level of evidence that normal IM traffic is not secure. In comparison, Trillian client to Trillian client Secure IM obscures the traffic through data encryption. The following paragraphs detail the findings from a practical exercise setup to monitor the network packets. Three scenarios were tested and monitored. All scenarios used AOL as the IM provider. The specific client applications connecting to AOL servers were the AOL client version 5.1.3036 and the Trillian client application version .74. The first scenario used AOL client to AOL client communication, or normal AOL user traffic. The second scenario consisted of one Trillian client user and one AOL client user. The third scenario consisted of two Trillian client users connecting to AOL IM servers. The monitoring tool used for the analysis was Ethereal. Ethereal is a freely distributed monitoring application. It can be used on Unix and Windows platforms to examine data from a live network or from a capture file stored on disk ("Ethereal Home", 2003). Ethereal was run from one of the two client machines to monitor all inbound and outbound network communications. The interface used was the network adapter of the source user. The same accounts were used in each scenario. The full set of scenario screen prints is available in Appendix B. This section contains a subset of the screen prints showing the most relevant data

supporting this paper's conclusion that Trillian client to Trillian client network communications are secure between two AOL users.

A. Analysis of Standard AOL IM Network Packets

In scenario one, the traffic of two AOL client users using AOL Instant Messenger version 5.1.3036 was examined. In the screenshot below, line 233 of the Ethereal output displays a text message sent to an AOL service user. The content of the message can be clearly seen in the translated hexadecimal packet. The text in the packet that was submitted via plain text across the Internet was:

<HTML><BODY BGCOLOR="#fffffff">This is a test of how secure AOL IM is.</BODY></HTML>

It is evident that monitoring of packets for organizations using the AOL Instant Messenger will reveal that communications are not being submitted securely. Users must understand that even when both are on the same corporate network, IM traffic is transmitted from one user to another via the Internet. The potential for compromising corporate data is very high. The only method to stop leaking confidential information is through training and policies. These policies will deter but not prevent employees from communicating data across an open network that should not be available to the public.

@ <c< th=""><th>apture> - Ether</th><th>eal</th><th></th><th></th><th></th></c<>	apture> - Ether	eal			
File	Edit Captur	e <u>D</u> isplay <u>T</u> ools			<u>H</u> elp
No	Time	Source	Destination	Protocol	Info 🗠
23	L 29.739819	10.100.63.102	64.12.30.156	TCP	2758 > 5190 [ACK] Seq=3862220213 Ack=567126260 Win=16843
23	2 44.013309	10.100.63.102	64.12.30.156	AIM	Message to: murphy2771793 -> This is a test of how secure
23	3 44.092496	64.12.30.156	10.100.63.102	AIM	SNAC data, Family: Messaging
		10.100.63.102	64.12.30.156	TCP	2758 > 5190 [ACK] Seq=3862220381 Ack=567126300 Win=16803
		64.12.30.156	10.100.63.102	AIM	SNAC data, Family: Location
		10.100.63.102	64.12.30.156	TCP	2758 > 5190 [АСК] Seq=3862220381 Ack=567126338 win=16765
		10.100.63.102	10.100.63.1	DNS	Standard query A ar.atwola.com
		10.100.63.1	10.100.63.102	DNS	Standard query response CNAME ads.web.aol.com A 152.163.
		10.100.63.102	205.188.165.121	TCP	2776 > http [SYN] Seq=3872510695 Ack=0 win=16384 Len=0
24	0 49.918859	205.188.165.121	10.100.63.102	TCP	http > 2776 [SYN, ACK] Seq=346172282 Ack=3872510696 win=
					X
E Er	ama 737 (77	2 bytes on wire, 222 l	ovtes cantured)	******	
			A Det. 00.40.05.63.01	∩h	4
0.00	44	F- 00 00 D- 00 47 40	<u> </u>		 ای ا
0030				.:^*. (
0050		72 70 68 79 32 37 37		nurphy2	
0060		01 00 03 01 01 02 01	01 00 6d 00 00 00 .:	K	
0070		54 4d 4c 3e 3c 42 4f			BODY BGC
0080					
0090 00a0		54 20 4c 41 4e 47 3d 69 73 20 61 20 74 65		sisa :	G="0">Th
0000					re AOL I
0000	4d 20 69	73 2e 3c 2f 46 4f 4e	54 3e 3c 2f 42 4f M	is. <td>ONT></td>	ONT>
00d0	44 59 3e	3c 2f 48 54 4d 4c 3e	00 03 00 00 D	Y> <td>L></td>	L>
Filter			V Reset		estination Hardware Address (eth.dst), 6 bytes
]]		<u> </u>		Sanaton Haranaro Haarooo (an. aoy, a bytea

B. Analysis of Trillian to AOL IM network packets

The second scenario examines the usage of Cerulean Studios' Trillian v .74 and AOL Instant Messenger. The communications in this example were not secured, because Trillian was not able to establish and transfer the key encryption key using Diffie-Hellman. Because of this, data flows insecurely between users. This is a potential problem with users of Trillian. It should be made clear that Trillian users are only securely submitting Instant Messages when communicating with another Trillian user, using AOL or ICQ type messages. Trillian users will see feedback when a secure session has been established.

C. Analysis of Trillian Encryption IM Network Packets

The third scenario examines communications between two Cerulean Studios' Trillian users. Both users have selected in their preferences to activate Secure IM. In addition, both users have selected to maintain a Secure IM connection with contacts. These settings are found under Properties, Chatting Services, AIM, Misc. Both "Activate SecureIM Capabilities" and "When possible, make a best effort to automatically maintain a SecureIM session with my contacts" should be checked to enable encryption of AOL and ICQ type transmissions.

The communications initiated between the users when both used Cerulean Studios' Trillian applications resulted in a secure session using the Diffie-Hellman key exchange and 128-bit Blowfish key. During the connection, a user receives visual feedback that a Secure IM session has been started. Below is the example from the scenario test.



Once the connection is established all traffic is securely transferred. In an analysis of the packets it is clear that a communication was sent to the user murphy2771793, but the content of the message has been encrypted and cannot be interpreted. The same HTML message that was displayed in clear text with the AOL application is now transmitted as encrypted data between the two Trillian users:

!DE151FE6286CD49B49B8E2EC0AB22177 ê !DC2AD914654A2B432DACF77839432E3C

Capture >	- Ether	eal					
File Edit	File Edit Capture Display Tools Help						
No. 🗸 Time		Source	Destination	Protocol	Info		
2 0.27 3 0.34 4 0.35 5 0.64 6 8.19	6192 0933 7120 8333 98171	10.100.63.102 64.12.30.156 64.12.30.156 10.100.63.102 64.12.30.156 64.12.30.156 64.12.30.156 10.100.63.102	64.12.30.156 10.100.63.102 10.100.63.102 64.12.30.156 10.100.63.102 10.100.63.102 64.12.30.156	AIM TCP AIM AIM TCP AIM TCP	<pre>Message to: murphy2771793 -> 2E3C 5190 > 2898 [ACK] Seq=35936822 Ack=4102325792 win=16384 Message from: murphy2771793 -> 799D 5190 > 2898 [ACK] Seq=35936967 Ack=4102325874 win=16384 Oncoming Buddy: murphy2771793 2898 > 5190 [ACK] Seq=4102325874 Ack=35937023 win=17269 </pre>		
8 10.8 9 11.0	323540 94771	10.100.63.102 205.188.10.215 10.100.63.102	205.188.10.215 10.100.63.102 10.100.63.1	AIM TCP SSDP	Unknown Channel 5190 > 2900 [ACK] seq=3571946332 Ack=4106967679 win=1638 M-SEARCH * HTTP/1.1		
		bytes on wire, 210 by src: 00:40:05:b8:eb:e	tes captured) d, Dst: 00:40:05:c3:01				
0010 00 0020 1e 0030 44 0040 00 0050 0d 0060 00 0070 fe 0080 00 0090 31 00a0 45 00b0 21	<pre>c4 e9 9c 0b 3e 61 00 00 6d 75 70 00 ad 4d 01 03 46 45 32 45 44 43 32 44</pre>	9c 40 00 80 06 68 25 52 14 46 f4 84 85 84 ef 00 00 2a 02 00 45 04 00 63 03 f8 3f 73 30 03 03 68 79 32 37 37 37 03 03 68 79 32 37 37 37 03 03 78 3f 37 37 37 37 03 03 78 3f 37 37 37 37 03 03 78 3f 37 37 37 37 04 30 35 36 79 8b df 44 36 34 34 34 34 34 34 34 34 34 34 34 34 34 34 34	0a 64 3f 66 40 0c 02 24 5a 36 50 18 . 00 96 00 04 00 06 . . a7 a4 43 12 00 02 . . 31 37 39 33 00 05 . . 43 12 f2 e7 c7 f4 . . 00 01 a7 00 02 . . . 00 13 e7 00 02 . . . 00 21 44 45 13 15 . . 37 42 34 39 42 38 1 37 37 00 32 a0 E . 35 34 41 32 42 34 1	@ >a%. murphy2 p0? .M56y FE6286C 2EC0AB2 DC2AD91 2DACF77	\$26P. E 71.c. 771793 bel5 D4984988 2177 4654A284 839432e3		
Filter:				7 Rese	t Apply File: <capture> Drops: 0</capture>		

It is evident from this analysis that Trillian adds a layer of security to IM for AOL users that will be beneficial to any organization. Using the packet analysis alone, there is cause for widespread usage of Trillian over the vendor provided AOL client software.

VI. Research Findings

From the research on this product and the analysis of the underlining packets, the following capabilities and limitations are clear.

A. Trillian Capabilities

Trillian has the capability to secure IM communications across the public Internet. The key factors that must be in place to support this capability are:

- The source and target user must both be using Trillian.
- Each Trillian user must use an AOL account. Trillian cannot securely transmit MSN and Yahoo messages.
- Each user must have the appropriate secure communications set in their Trillain preferences.

B. Trillian Limitations

There are some limitations with Trillian that detract from its usefulness. These limitations are listed below:

- Trillian only has the capability to encrypt data for ICQ and AOL. The application does not have the capability to secure MSN or Yahoo IM.
- If one of the two users in communicating does not use Trillian the entire communication with that user will remain insecure.
- Trillian was not designed to be a robust enterprise solution, but it does provide for secure IM with AOL users.
- The main three vendors, Microsoft, AOL Time Warner, and Yahoo, are all pushing for a corporate solution, which may handle filtering in and out public level messages. Trillian will have a difficult time competing with this type of solution if they are successful.
- One final limitation is the key length. Currently the key length is 128-bits, but could potentially be increased to 448-bits. Increasing the size of the key length will result in better overall security.

VII. Conclusion

Widespread usage of Instant Messaging technology has occurred and continues to grow and expand throughout the corporate sector. Using Instant Messaging as a collaboration tool and productivity enhancer must be weighed against the potential security issues associated with IM. From the analysis of Trillian it is clear that the application has positive benefits in the corporate sector. Trillian successfully encrypts data transmission between two Trillian client applications for AOL based IM. Trillian can be used across the Internet with confidence that corporate data is secure. Cerulean Studios has set the bar for corporate level IM with Trillian. Any corporate solution must integrate secure messaging to users outside the corporate Intranet in order for it to viably compete with Trillian. The fact that this solution can be implemented at no cost to individual users is outstanding. Security awareness training is important and should continue to be used in all organizations tailored to the specific IM applications used in the organization. Although Trillian is not flawless, it has great potential and is recommended for all users of the AOL service.

VIII. References

"3.6.1 What is Diffie-Hellman?" RSA Security. http://www.rsasecurity.com/rsalabs/faq/3-6-1.html. April 25, 2003.

"Block Cipher." Wikipedia. http://www.wikipedia.org/wiki/Block_cipher. May 1, 2003.

"Blowfish Encryption." Tropical Software. http://www.tropsoft.com/strongenc/blowfish.htm. April 15, 2003.

"Cerulean Studios' Home Page." Cerulean Studios. http://www.trillian.cc/about/index.html. April 4, 2003.

"Cerulean Studios' Trillian Pro version 1.0 Home Page." Cerulean Studios. http://www.trillian.cc/trillianpro/index.html. April 4, 2003.


"Cerulean Studios' Trillian version .74 Home Page." Cerulean Studios. http://www.trillian.cc/trillian/features-1.html. April 4, 2003.

"Collaborative Technologies Critical to the Financial Industry's Development over the Next Three Years." (April 22, 2002). Reuters. http://about.reuters.com/newsreleases/art_22-4-2002_id958.asp. May 17, 2003.

"Ethereal Home Page." Ethereal. http://www.ethereal.com/. May 25, 2003.

Palmgren, Keith. "Diffie-Hellman Key Exchange – A Non-Mathematician's Explanation." NetIP, Inc. http://www.netip.com/articles/keith/diffie-helman.htm. April 17, 2003.


Schneier, B. "Description of a New Variable-Length Key, 64-Bit Block Cipher (Blowfish)." Counterpane Internet Security, Inc. http://www.counterpane.com/bfsverlag.html. May 15, 2003.

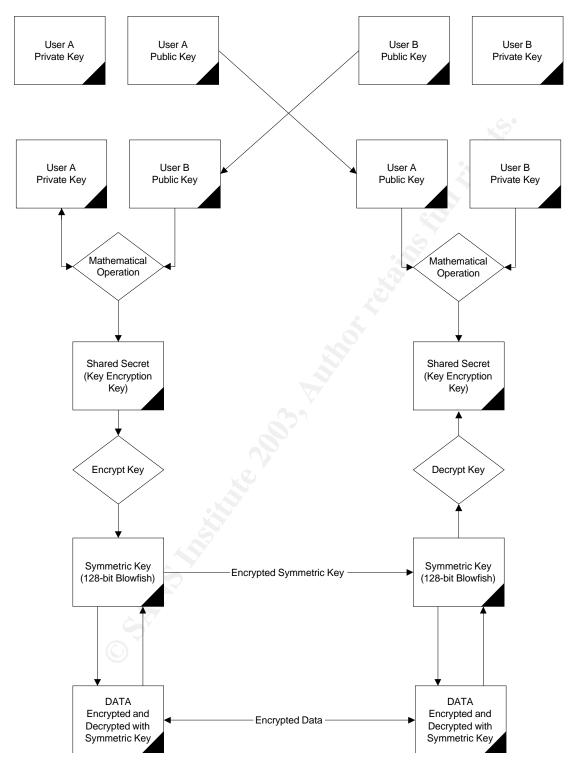

Appendix A: Trillian Encryption - A combination of Diffie-Hellman Key Exchange and 128-bit Blowfish Symmetric Key

Appendix B: Screen prints and Results of Scenario Testing

Scenario 1: Communications via two AOL Instant Messenger clients version 5.1.3036. The first diagram below shows the data that was passed between the two users.

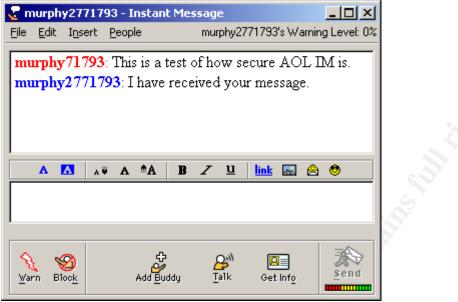

The following Ethereal packet breakdown shows the message sent from murphy71793 to murphy2771793. The data is submitted via plain text between the two users. The data flows across the Internet where hackers could analyze the packets and easily pull any confidential data.

🎯 <ca< th=""><th colspan="5">🕄 <capture> - Ethereal</capture></th></ca<>	🕄 <capture> - Ethereal</capture>				
File	Edit <u>C</u> aptur	e <u>D</u> isplay <u>T</u> ools			Help
No. 🗸	Time	Source	Destination	Protocol	Info 🛛
		10.100.63.102	64.12.30.156	TCP	2758 > 5190 [АСК] Seq=3862220213 Ack=567126260 Win=16843
232	44.013309	10.100.63.102	64.12.30.156	AIM	Message to: murphy2771793 -> This is a test of how secur
233	44.092496	64.12.30.156	10.100.63.102	AIM	SNAC data, Family: Messaging
		10.100.63.102	64.12.30.156	TCP	2758 > 5190 [ACK] Seq=3862220381 Ack=567126300 Win=16803
		64.12.30.156	10.100.63.102	AIM	SNAC data, Family: Location
		10.100.63.102	64.12.30.156	TCP	2758 > 5190 [ACK] Seq=3862220381 Ack=567126338 Win=16765
		10.100.63.102	10.100.63.1	DNS	Standard query A ar.atwola.com
		10.100.63.1	10.100.63.102	DNS	Standard query response CNAME ads.web.aol.com A 152.163.
		10.100.63.102	205.188.165.121	TCP	2776 > http [SYN] Seq=3872510695 Ack=0 win=16384 Len=0 🛛 🗌
240	49.918859	205.188.165.121	10.100.63.102	TCP	http > 2776 [SYN, ACK] Seq=346172282 Ack=3872510696 Win=: 7
					X
I III C III -		2 bytes on wire, 222 b	othe conturned)		
			Jytes captureu) 1	۰ûh	Þ
0030	41 cb 3a				GΔ 29CE2
0040		72 70 68 79 32 37 37			771793
0060	00 78 05				m
0070	00 3c 48				BODY BGC
0080		52 3d 22 23 66 66 66			fffff"><
0090					G="0">Th
00a0 00b0		69 73 20 61 20 74 65 20 73 65 63 75 72 65			test of re AOL I
0000					ONT>
00d0				Y> <td></td>	
<u> </u>	Г			[որուս[[-	estination Hardware Address (eth.dst), 6 bytes
Filter:	I				estination naruware Audress (eth.ust), o bytes

The next screenshot is of the response from murphy2771793 to murphy71793. Again the communication is passed in plain text.

🍘 <ca< th=""><th>oture> - Ether</th><th>eal</th><th></th><th></th><th></th></ca<>	oture> - Ether	eal			
File	Edit <u>C</u> aptur	e <u>D</u> isplay <u>T</u> ools			Help —
No. 🗸	Time	Source	Destination	Protocol	Info A
		10.100.63.102	64.12.30.156	TCP	2758 > 5190 [АСК]́ Seq=3862220381 Ack=567126464 win=16639
		64.12.30.156 10.100.63.102	10.100.63.102 64.12.30.156	AIM TCP	Message from: murphy2771793 -> I have received your mess 2758 > 5190 [ACK] seg=3862220381 Ack=567126648 win=16455
		10.100.63.102	64.12.30.156	AIM	Unknown Channel
		64.12.30.156	10.100.63.102	TCP	5190 > 2758 [ACK] seg=567126648 Ack=3862220387 win=16384
272	72.791808	10.100.63.102	64.12.26.13	AIM	Unknown Channel
		10.100.63.102	205.188.10.212	AIM	Unknown Channel
		64.12.26.13 205.188.10.212	10.100.63.102	TCP	5190 > 2762 [ACK] seq=3914550954 Ack=3862977586 win=1638
		10.100.63.102	10.100.63.102 10.100.63.1	TCP SSDP	5190 > 2761 [ACK] seq=1614033554 Ack=3862919209 Win=1638
	/ 5.01/ 505	10.100.05.102	10.100.05.1	5501	
		8 bytes on wire, 238 b src: 00:40:05:c3:01:0b	oytes captured) o, Dst: 00:40:05:b8:eb	:ed	
<u>1</u>					
0000 0010 0020 0030 0050 0050 0060 0070 0080 0090 0080 0090 0080 0090 0080 0000	3f 66 14 40 00 b4 00 00 88 0d 6d 75 00 03 00 01 01 02 3e 3c 42 23 66 66 41 4e 47 65 63 65 73 61 67	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	40 0 c 1e 9c 0a 64 . e6 34 ce 5d 50 18 ? 00 b2 00 04 00 70 06 43 45 32 00 00 01 . 31 37 39 33 00 00 . . 00 04 00 00 01 be . . 00 64 00 00 01 be . . 00 32 48 54 4d 4c . 46 4f 52 3d 22 > . . 46 4f 4e 54 20 4c . . 46 4f 4e 54 20 4c . . 46 4f 4e 54 20 4c . .	@.l. f.F!. 8C murphy2 > <body b<br="">ffffff" NG="0"> ceived age.<td>4.]P. 29CE2 771793 n n </td></body>	4.]P. 29CE2 771793 n n
Filter:				✓ Reset	Apply File: <capture> Drops: 0</capture>

🍘 Trillian	n-AOL - Ether	eal			
File Ed	dit <u>C</u> apture	e <u>D</u> isplay <u>T</u> ools			<u>H</u> elp
No. 🗸 Ti	ïme	Source	Destination	Protocol	Info A
82 99 109 119 121	2.273198 9.402398 9.752861 9.903050 .0.034600	10.100.63.102 64.12.201.34 10.100.63.102 10.100.63.102 10.100.63.102 205.188.153.11 64.12.30.156	64.12.201.34 10.100.63.102 64.12.30.156 205.188.153.11 64.12.30.156 10.100.63.102 10.100.63.102	AIM TCP AIM AIM TCP TCP	Unknown Channel 5190 > 2902 [ACK] Seq=3397993061 Ack=4107103330 win=1638 Set Idle Unknown Channel Set Idle 5190 > 2934 [ACK] Seq=3306000447 Ack=4187483122 win=1638 5190 > 2898 [ACK] Seq=35935283 Ack=4102325114 win=16384 I
15 1	0.634207	10.100.63.102 64.12.30.156 64.12.201.34	64.12.30.156 10.100.63.102 10.100.63.102	AIM TCP TCP	Message to: murphy2771793 -> This is a test of how secur 5190 > 2898 [ACK] seq=35935283 Ack=4102325292 Win=16384 5190 > 2902 [RST, ACK] seq=3397993061 Ack=4107103330 Win
	o 14 (323	bytes on wire, 232 by	tos contunad)		
			d, Dst: 00:40:05:c3:01	:0b	Þ
<u> </u>					
0010 (0020 2 0030 2 0050 (0050 (0060 (0070 (0080 2 0080 2 0090 2 0060 2 0060 2 0060 2	00 da e6 1e 9c 0b 44 df 3b 00 00 00 0d 6d 75 00 86 05 00 3c 48 4f 4c 4f 66 6f 6e 22 3e 54 20 6f 66 72 69 6c 72 61 66	b9 40 00 80 06 6a f2 52 14 46 f4 84 83 7a b0 00 00 2a 02 00 29 03 00 06 16 76 a7 93 72 70 68 79 32 37 37 01 00 03 01 01 02 01 20 03 01 01 02 01 00 03 01 01 02 03 01 00 03 01 01 02 01 00 03 01 01 02 01 00 03 01 01 02 01 03 03 01 01 02 01 03 03 01 01 02 04 66 66 66 66 66 66 66 66 67 32 02 03 03 02 <td>$\begin{array}{cccccccccccccccccccccccccccccccccccc$</td> <td>00 </td> <td>2.\$T3P. </td>	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	00 	2.\$T3P.
Filter:				✓ Reset	Apply File: Trillian-AOL

The response, as expected, is also unsecure.

Control	ian-AOL - Ether	real			
File	Edit <u>C</u> aptur	e <u>D</u> isplay <u>T</u> ools			<u>H</u> elp
No. 🗸	Time	Source	Destination	Protocol	Info
20 21 22 23 24 25 26 27	15.416214 15.416229 15.419304 18.358233 18.358363 18.360696 18.362208 22.588154	AniCommu_b8:eb:ed LinksysG_4d:c2:33 AniCommu_b8:eb:ed LinksysG_4d:c2:33 10.100.63.102 10.100.63.1 10.100.63.1 64.12.30.156	Broadcast Broadcast LinksysG_4d:c2:33 AniCommu_b8:eb:ed 10.100.63.1 10.100.63.102 10.100.63.102 10.100.63.102	ARP ARP ARP SSDP SSDP ICMP ICMP AIM	<pre>who has 10.100.63.100? Tell 10.100.63.102 who has 10.100.63.102? Tell 10.100.63.100 10.100.63.102 is at 00:40:05:b8:eb:ed 10.100.63.100 is at 00:04:5a:4d:c2:33 M-SEARCH * HTTP/1.1 M-SEARCH * HTTP/1.1 Destination unreachable Destination unreachable Message from: murphy2771793 -> I have received your mess</pre>
28	22.724345	10.100.63.102	64.12.30.156	ТСР	2898 > 5190 [ACK] seq=4102325292 Ack=35935466 win=17448
		. h. t	the second se		
		' bytes on wire, 237 by src: 00:40:05:c3:01:0		:ed	Þ
0000 0010 0020 0030 0040 0050 0060 0070 0080 0090 0080 0090 0080 0090 0080 0090 0080 0090	00 df 11 3f 66 14 40 00 ef 00 00 88 0d 6d 75 00 03 00 00 03 00 01 01 02 3e 3c 42 23 66 66 41 4e 47 65 63 65	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	f.F.R.\$ 0H.V murphy2 b. <gody b<br="">ffffff" NG="0"> ceived age<td>S.@d T3,P. X T71793 GCOLOR=" S<font l<br="">I have r your mes NT><fodd X</fodd </td></gody>	S.@d T3,P. X T71793 GCOLOR=" S <font l<br="">I have r your mes NT><fodd X</fodd
Filter:				✓ Rese	t Apply File: Trillian-AOL

Scenario 2: This scenario examines AOL communications via one AOL client application and one Cerulean Studios' Trillian client application. The first screen print shows the data passed between the two users. Notice that even though Trillian is used, no feedback is given as far as establishing a Secure IM session. This is a result of not having both users running Trillian.



Similar to the Scenario 1, Ethereal reveals the AOL IM packets transferring across the network and they are clearly not encrypted, even though one user has Trillian.

🍘 Trilli	ian-AOL - Ether	real					
File	<u>File Edit Capture Display Tools</u>						
No. 🗸	Time	Source	Destination	Protocol	Info 🖉		
8 9 10 11 12	2.273198 9.402398 9.752861 9.903050 10.034600	10.100.63.102 64.12.201.34 10.100.63.102 10.100.63.102 10.100.63.102 205.188.153.11	64.12.201.34 10.100.63.102 64.12.30.156 205.188.153.11 64.12.30.156 10.100.63.102	AIM TCP AIM AIM AIM TCP	Unknown Channel 5190 > 2902 [ACK] seq=3397993061 Ack=4107103330 win=1638 Set Idle Unknown Channel set Idle 5190 > 2934 [ACK] seq=3306000447 Ack=4187483122 win=1638 5190 > 2934 [ACK] seq=3306000447 Ack=4187483122 win=1638		
14	10.327252	64.12.30.156 10.100.63.102 64.12.30.156	10.100.63.102 64.12.30.156 10.100.63.102	TCP AIM TCP	5190 > 2898 [ACK] seq=35935283 Ack=4102325114 win=16384 Message to: murphy2771793 -> This is a test of how secur 5190 > 2898 [ACK] seq=35935283 Ack=4102325292 win=16384		
		64.12.201.34	10.100.63.102	тср	5190 > 2898 [ACK] 544=53955285 ACK=4102525292 Win=16384 1 5190 > 2902 [RST, ACK] 544=3397993061 Ack=4107103330 Win 7		
		bytes on wire, 232 b src: 00:40:05:b8:eb:e	ytes captured) d, Dst: 00:40:05:c3:01	:0b			
0000 0010 0020 0040 0050 0060 0070 0080 0090 0080 0090 0090 0000 000	00 da e6 1e 9c 0b 44 df 3b 00 00 00 0d 6d 75 00 3c 48 4f 4c 4f 66 6f 6e 22 3e 54 20 6f 66 72 69 66 72 61 66		0a 64 3f 66 40 0c 02 24 54 33 50 18 . 00 ac 00 04 00 06 D D 04 ac 00 04 00 06 D <td></td> <td>jd2f@. .z.\$T3P. .j F(BODY BGC fffff">< e="Arial s a test secure T to AOL t s.</td>		jd2f@. .z.\$T3P. .j F(BODY BGC fffff">< e="Arial s a test secure T to AOL t s.		
Filter:				V Rese	et Apply File: Trillian-AOL		

The response message is also sent in clear text without encryption. The data can not be encrypted if both users are not running the Trillian client application.

File Edit Capture Display Tools Help No. Time Source Destination Protocol Info Info<	🙆 Trilli	an-AOL - Ethe	real			
19 15.414420 Anicommu_b8:eb:ed Broadcast ARP who has 10.100.63.10? Tell 10.100.63.102 20 15.416229 Anicommu_b8:eb:ed LinksysG_4d:c2:33 Broadcast ARP who has 10.100.63.10? Tell 10.100.63.100 21 15.416229 Anicommu_b8:eb:ed LinksysG_4d:c2:33 ARP 10.100.63.102 is at 00:40:5:b8:eb:ed 22 15.419304 LinksysG_4d:c2:33 Anicommu_b8:eb:ed ARP 10.100.63.100 is at 00:45:a:4d:c2:33 23 18.358333 10.100.63.102 10.100.63.102 ICMP Destination unreachable 24 18.358038 10.100.63.102 10.100.63.102 ICMP Destination unreachable 27 25.858154 64.12.30.156 10.100.63.102 ICMP Destination unreachable 27 22.588154 64.12.30.156 10.100.63.102 AIM MEssage from: murphy2771793 -> 1 have received your mess 28 22.724345 10.100.63.102 64.12.30.156 TCP 2898 > 5190 [ACK] seq=4102325292 Ack=35935466 win=17448 i 0010 00 45 11 fa 40 00 6 co 53 ad 00 02 45 00 666 66 6 00100 00 40 00 5 c3 01 0b 08 00 45 00 6 66 6 6	File	Edit Captur	re <u>D</u> isplay <u>T</u> ools			Help
20 15.416214 LinksysG_4d:c2:33 Broadcast ARP who has 10.100.63.102 Tell 10.100.63.100 21 15.416229 Anicommu_b8:eb:ed LinksysG_4d:c2:33 ARP 10.100.63.102 is at 00:40:05:b8:eb:ed 21 15.416229 Anicommu_b8:eb:ed LinksysG_4d:c2:33 ARP 10.100.63.100 is at 00:04:05:b8:eb:ed 21 15.416229 Anicommu_b8:eb:ed Anicommu_b8:eb:ed ARP 10.100.63.100 is at 00:04:5:d4d:c2:33 23 18.358333 10.100.63.102 10.100.63.102 ICMP Destination unreachable 24 18.358238 10.100.63.11 10.100.63.102 ICMP Destination unreachable 26 18.362208 10.100.63.102 64.12.30.156 TCP 2898 > 5190 [ACK] Seq=4102325292 Ack=35935466 win=17448 if 28 22.724345 10.100.63.102 64.12.30.156 TCP 2898 > 5190 [ACK] Seq=4102325292 Ack=35935466 win=17448 if 28 Ethernet II, src: 00:40:05:3:01:0b, bst: 00:40:05:b8:eb:ed	No	Time	Source	Destination	Protocol	Info
Image: Constraint of the state of	20 21 22 23 24 25 26 27 28 27 28	15.416214 15.416229 15.419304 18.358363 18.358366 18.360696 18.362208 22.588154 22.724345 mme 27 (237	LinksysG_4d:c2:33 AniCommu_b8:eb:ed LinksysG_4d:c2:33 10.100.63.102 10.100.63.102 10.100.63.1 64.12.30.156 10.100.63.102 7 bytes on wire, 237 b	Broadcast LinksysG_4d:C2:33 AniCommu_B8:eb:ed 10.100.63.1 10.100.63.102 10.100.63.102 10.100.63.102 64.12.30.156	ARP ARP SSDP SSDP ICMP ICMP AIM TCP	<pre>who has 10.100.63.102? Tell 10.100.63.100 10.100.63.102 is at 00:40:05:b8:eb:ed 10.100.63.100 is at 00:04:5a:4d:c2:33 M-SEARCH * HTTP/1.1 M-SEARCH * HTTP/1.1 Destination unreachable Destination unreachable</pre>
0000 00 40 05 b8 be b6 00 40 05 c3 01 b0 08 00 45 00 6 E. 6 <td></td> <td>ernet II,</td> <td>src: 00:40:05:c3:01:0</td> <td>b, Dst: 00:40:05:b8:e</td> <td>b:ed</td> <td>۵</td>		ernet II,	src: 00:40:05:c3:01:0	b, Dst: 00:40:05:b8:e	b:ed	۵
	0010 0020 0030 0040 0050 0060 0070 0080 0090 0090 0090 0000 00b0 00b0 00c0 00d0	00 df 11 3f 66 14 40 00 ef 00 00 88 0d 6d 75 00 03 00 00 03 00 01 01 02 23 66 66 41 4e 47 65 63 66 73 61 67	$ \begin{array}{cccccccccccccccccccccccccccccccccccc$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$.@@ @.1. ?f.F.R.\$ @*. 	S.@d T3,P. X T71793 GCOLOR=" S <font l<br="">I have r your mes NT>

Scenario 3: This scenario examines AOL communications via two Cerulean Studios' Trillian users. The first screen print shows murphy71793 establishing a Secure IM

session with Murphy2771793. This feedback is always present when creating Secure IM sessions.

O murphy2771793	
 *** murphy71793 wants to establish a SecurelM session. *** SecurelM session established with murphy2771793. murphy71793: This is a test of how secure Trillian to Trillian AOL User traffic is. murphy2771793: I have received your message. 	
A 🚺 A. A A [*] B I 🙂 💿 😛	
	all
SEND -	

In this case Ethereal does reveal that there are AOL IM (AIM) packets transferring across the network, but as seen in the raw data, Ethereal cannot interpret the encrypted data.

<pre>(capture> - Eti</pre>	ereal						
<u>File Edit Cap</u>	File Edit Capture Display Tools Help						
No Time	Source	Destination	Protocol	Info			
1 0.00000	0 10.100.63.102	64.12.30.156	AIM	Message to: murphy2771793 -> 2E3C			
2 0.276193		10.100.63.102	TCP	5190 > 2898 [ACK] Seq=35936822 Ack=4102325792 win=16384 (
3 0.34093	3 64.12.30.156	10.100.63.102	AIM	Message from: murphy2771793 -> 799D			
4 0.35712	10.100.63.102	64.12.30.156	AIM				
5 0.648333	3 64.12.30.156	10.100.63.102	TCP	5190 > 2898 [АСК] Seq=35936967 Ack=4102325874 win=16384 (
6 8.19817:	L 64.12.30.156	10.100.63.102	AIM	Oncoming Buddy: murphy2771793			
7 8.31987		64.12.30.156	TCP	2898 > 5190 [ACK] seq=4102325874 Ack=35937023 Win=17269 (
	10.100.63.102	205.188.10.215	AIM	Unknown Channel			
	71 205.188.10.215	10.100.63.102	TCP	5190 > 2900 [ACK] Seq=3571946332 Ack=4106967679 Win=1638			
10 13.63134	40 10.100.63.102	10.100.63.1	SSDP	M-SEARCH * HTTP/1.1			
1							
E Enamo 1 (21	0 bytes on wire, 210 b	the contured)	*******	F			
		ed, Dst: 00:40:05:c3:01	:0b				
				K			
0000 00 40 0	15 c3 01 0b 00 40 05 b	8 eb ed 08 00 45 00		E. 🖸			
0010 00 c4 e	9 9 40 00 80 06 68 2	5 0a 64 3f 66 40 Oc .	@	h%.d?f@.			
	b 52 14 46 f4 84 85 8	4 02 24 5a 36 50 18 .	R.F	\$Z6P.			
	1 ef 00 00 2a 02 00 4 0 04 00 06 30 03 f8 3	5 00 96 00 04 00 06 1 f a7 a4 43 12 00 02 .	>a*.	.E .?C			
	'5 72 70 68 79 32 37 3	$7 \ 31 \ 37 \ 39 \ 33 \ 00 \ 05 \ .$		771793			
0060 00 70 0	0 00 30 03 f8 3f a7 a d fb b2 35 36 79 8b d	4 43 12 f2 e7 c7 f4	p. 0. ?				
0070 fe ad 4	d fb b2 35 36 79 8b d	f 00 00 03 e7 00 02 .	.м. 56y				
	3 e8 00 02 00 00 03 e	9 00 21 44 45 31 35		!DE15			
0090 31 46 4 00a0 45 32 4	5 36 32 38 36 43 44 3 5 43 30 41 42 32 32 3		EZECUABZ	D49B49B8			
	3 32 41 44 39 31 34 3	6 35 34 41 32 42 34		4654A2B4			
00c0 33 32 4			32DACF77	839432E3			
00d0 43 00		(
Filter:			 √ Rese	t Apply File: <capture> Drops: 0</capture>			

The response message is also encrypted. This case displays that when using Trillian client on both ends of an IM communication, that all data transmits as encrypted data.

🎯 <capture> - Ethereal</capture>			
<u>File Edit Capture Display</u>	y <u>T</u> ools		Help —
No Time Source	Destination	Protocol	Info A
1 0.000000 10.100. 2 0.276192 64.12.3		AIM TCP	Message to: murphy2771793 -> 2E3C 5190 > 2898 [AcK] seg=35936822 Ack=4102325792 win=16384 I
3 0.340933 64.12.3		AIM	Message from: murphy2771793 -> 7990
4 0.357120 10.100.		AIM	
5 0.648333 64.12.3	0.156 10.100.63.102	TCP	5190 > 2898 [АСК] Seq=35936967 Ack=4102325874 win=16384 и
6 8.198171 64.12.3		AIM	Oncoming Buddy: murphy2771793
7 8.319878 10.100.		TCP	2898 > 5190 [ACK] Seq=4102325874 Ack=35937023 win=17269
8 10.823540 10.100. 9 11.094771 205.188		AIM TCP	Unknown Channel 5190 > 2900 [ACK] seq=3571946332 Ack=4106967679 win=1638
10 13.631340 10.100.		SSDP	M-SEARCH * HTTP/1.1
10 13:031340 10:100		5501	M SEARCH . INTY 2.1
M			
	n wire, 199 bytes captured)		Ð
Ethernet II, Src: 00	:40:05:c3:01:0b, Dst: 00:40:05:b8	:ep:ed	M
M			22
0000 00 40 05 b8 eb e		.@@	
0010 00 b9 a4 19 40 0 0020 3f 66 14 46 0b 5		@.]. ?f.F.R.\$:	
0030 40 00 bb c6 00 0		аннык.э. С	x6
0040 00 00 88 b6 eb d	1 8b 9c 0c c2 bf e0 e3 98 00 02	· · · · · · · · · · · · · · · ·	
0050 0d 6d 75 72 70 6 0060 00 03 00 01 00 0		.murphy2	771793
0070 00 03 00 04 3e c		>	к
0080 Oc c2 bf e0 e3 9	8 f2 e7 c7 f4 fe ad 4d fb b2 35		
0090 36 79 8b df 00 0 00a0 00 01 03 eb 00 2	0 03 e7 00 02 00 01 03 e8 00 02 1 39 39 41 39 44 43 44 33 44 39	6y !99 ,	
00b0 45 38 33 44 36 4		E83D6A45	
00c0 43 42 37 39 39 4	4 00	CB799D.	
Filter:		V Reset	Apply File: <capture> Drops: 0</capture>

Trillian successfully establishes and maintains a Secure IM session between the two users in the third scenario.