



Global Information Assurance Certification Paper

Copyright SANS Institute
Author Retains Full Rights

This paper is taken from the GIAC directory of certified professionals. Reposting is not permitted without express written permission.

Interested in learning more?

Check out the list of upcoming events offering
"Security Essentials Bootcamp Style (Security 401)"
at <http://www.giac.org/registration/gsec>

Neil B. Riser

Spoofing: An Overview of Some the Current Spoofing Threats

July 1, 2001

Version 1.2d

Introduction

Spoofing can take on many forms in the computer world, all of which involve some type fraudulent representation of information. There are a variety of methods and types of spoofing. I would like to introduce and explain four in this paper:

- **IP**
- **ARP**
- **Web**
- **DNS**

There are no legal or constructive uses for implementing spoofing of any type. Some of the outcomes might be sport, theft, vindication or some other malicious goal. The gravity of these attacks can be very severe, can cost us millions of dollars and should not be overlooked by the Internet security community.


IP Spoofing

IP spoofing is used to gain unauthorized access to a computer. The attacker forwards packets to a computer with a source address indicating that the packet is coming from a trusted port or system. Attackers must go through some complicated steps to accomplish the task. They must:

- Acquire a target
- Acquire an IP address of a trusted machine
- Disable communication of the trusted machine (e.g. syn flooding)
- Sample a communication between the target and trusted hosts
- Guess the sequence numbers of the trusted machine
- Modify the packet headers so that it appears that the packets are coming from the trusted host
- Attempt connection to an address authenticated service or port.
- If successful, the attacker will plant some kind of backdoor access for future reference (<http://www.fc.net/phrack/files/p48/p48-14.html>); 6/4/01.

System A impersonates system B by sending B's address instead of its own. The reason for doing this is that systems tend to function within groups of other "trusted" systems. This trust is implemented in a one-to-one fashion; system A trusts system B. IP spoofing occurs in the following manner: if system A trusts system B and system C spoofs system B, then system C can gain otherwise

denied access to system A. This is all made possible by means of IP address authentication, and if the packets are coming from external sources- poorly configured routers.

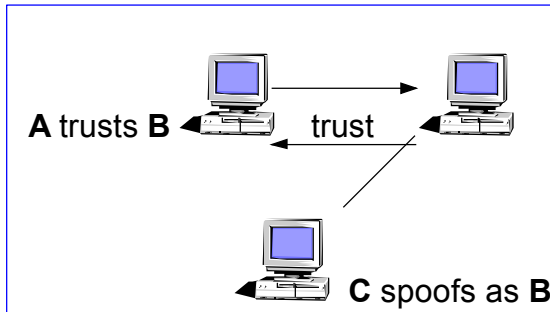


One of the major drawbacks with IP spoofing is that C never “sees” the responses from A. This is completely blind attack, much experience and knowledge of what to expect from the target’s responses is needed to successfully carry out his attack.

Some of the most common ways to avoid this type of attack are to disable source-routed packets and to disable all external incoming packets with the same source address as a local host.

For an excellent example of what a spoofing attack might look like visit: <http://www.blinky-lights.org/shimomura-25jan95.html>. This includes packet captures and contains explanations as to what the attacker is trying to accomplish as he is doing it.

ARP Spoofing

ARP (Address Resolution Protocol) is used to map IP addresses to hardware addresses. A table, usually called the ARP cache, is used to maintain a correlation between each MAC address and its corresponding IP address. ARP provides the protocol rules for making this correlation and providing address resolution in both directions. When an incoming packet sent to a host machine on a network arrives at a router, it asks the ARP program to find a MAC address that matches the IP address. The ARP program looks in the ARP cache and, if it finds the address, provides it so that the packet can be converted to the right packet length and format and sent to the machine. If no entry is found for the IP address, ARP broadcasts a request packet in a special format to all the machines on the network to determine if any machine knows who has that IP address. A machine that recognizes the IP address as its own returns a reply so indicating. ARP updates the ARP cache for future reference and then sends the packet to the MAC address that replied. Here is a sample ARP broadcast query:

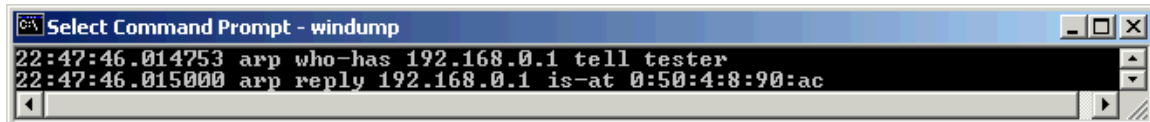

```
Select Command Prompt - windump
22:47:46.014753 arp who-has 192.168.0.1 tell tester
22:47:46.015000 arp reply 192.168.0.1 is-at 0:50:4:8:90:ac
```

One might deduct that this addressing scheme could also be spoofed to provide a host with incorrect information “ARP Spoofing involves constructing forged ARP request and reply packets. By sending forged ARP replies, a target computer could be convinced to send frames destined for computer A to instead go to computer B.” (http://packetstorm.securify.com/papers/protocols/intro_to_arp_spoofing.pdf) This referred to as ARP poisoning.

There are currently programs that automate the process of ARP poisoning – ARPoison, Ettercap, and Parasite. All three have the capability to provide spoofed ARP packets and therefore redirect transmission, intercept packets, and/or perform some type of man in the middle attack.

Either enabling MAC binding at a switch or implementing static ARP tables achieves prevention of ARP spoofing. MAC binding makes it so that once an address is assigned to an adapter; it cannot be changed without authorization. Static ARP management is only realistically achieved in a very small network. In a large dynamic network, it would be impossible to manage the task of keeping the entries updated. ARPWATCH, for Unix based systems, monitors changes to the ARP cache and alerts administrator as to the changes.

Web Spoofing

As with the other forms of spoofing Web or Hyperlink spoofing provides victims with false information. Web Spoofing is an attack that allows someone to view and modify all web pages sent to a victim's machine. They are able to observe any information that is entered into forms by the victim. This can be of particular danger due to the nature of information entered into forms, such as addresses, credit card numbers, bank account numbers, and the passwords that access these accounts.

Web Spoofing works on both Internet Explorer and Netscape and is not necessarily prevented by secure connections. This is due the way that the SSL protocol uses certificates to authenticate websites. The attacker can observe and modify all web pages and form submissions, even when the browser is indicating that there is a secure connection. The user usually never sees anything that is out of the ordinary (O'Dwyer, Frank, <http://www.brd.ie/papers/sslpaper/sslpaper.html>)

The attack can be implemented using JavaScript and Web server plug-ins, and works in two parts. First, the attacker causes a browser window to be created on the victim's machine, with some of the normal status and menu information replaced by identical-looking components supplied by the attacker. Then, the attacker causes all Web pages destined for the victim's machine to be routed

through the attacker's server. On the attacker's server, the pages are rewritten in such a way that their appearance does not change at all, but any actions taken by the victim (such as clicking on a link) would be logged by the attacker. In addition, any attempt by the victim to load a new page would cause the newly loaded page to be routed through the attacker's server, so the attack would continue on the new page. The attack is initiated when the victim visits a malicious Web page, or receives a malicious email message (if the victim uses an HTML-enabled email reader).

Current browsers do not completely prevent Web Spoofing, and there seems to be little movement in the direction of addressing this problem. I believe that there can be no fully secure electronic commerce on the Web until the Spoofing vulnerability has been addressed.

DNS Spoofing

DNS spoofing essentially occurs in three ways.

- An attacker compromises a DNS server and changes the hostname to IP address mappings. When someone requests the URL of one of the altered mappings that person is sent to a machine that is under the complete control of the attacker.
- An attacker can spoof the responses from DNS server before the real one comes. Guessing the connectionless, UDP sequence numbers does this. Sequence numbers are incremented by one, which makes this relatively easy to accomplish. If the attacker can sniff a transaction from the DNS server, he or she will then be able to accurately guess the sequence numbering.
- The DNS Cache can be “poisoned” simply sending false replies with a high TTL (so that the poisoning will last) to requesting the DNS server. A remote name server that is controlled by attacker, that is set up with false name resolutions is called upon, and then cached by the requester. (Erdfelt, Johannes <http://www.the-project.org/admins/0897-1097/0381.html>)

DNS spoofing can be utilized in some of the same ways as web spoofing. If someone is directed through a compromised server, any data that is entered into a website or online order form can be viewed. Much personal data can be gathered by this means. Email can also be redirected through a maligned server, which could be especially dangerous for companies who share proprietary information via email.

Some of the precautions to take would involve using the most up to date patches for all versions and implementations of DNS.

Conclusion

With the current implementations of spoofing, the network security community needs to be aware of the gravity and potential cost of these types of attacks. People can effectively maintain patching and monitoring of logs to minimize the potential damage.

References

- 1) Daemon9, Route, Infinity; “IP Spoofing Demystified (Trust Relationship Exploitation)”; Phrack Magazine; 1996; <http://www.fc.net/phrack/files/p48/p48-14.html>; 6/4/01.
- 2) “IP Address Spoofing and Hijacked Session Attacks”; 1/23/95 _ <http://ciac.llnl.gov/ciac/bulletins/f-08.shtml> ; 6/4/01.
- 3) Morris, Robert T.; “A Weakness in the 4.2BSD Unix TCP/IP Software”; <http://www.pdos.lcs.mit.edu/rtm/papers/117.pdf>; 6/28/01.
- 4) Felten, E., Balfanz, D., Dean, D., Wallach, D.S.; “Web Spoofing, An Internet Con Game”; <http://bau2.uibk.ac.at/matic/spoofing.htm>; 6/26/01.
- 5) O’Dwyer, Frank; “Hyperlink Spoofing: An Attack on SSL Server Authentication”; 1/3/1997; <http://www.brd.ie/papers/sslpaper/sslpaper.html>; 6/20/01.
- 6) Volobuev, Yuri; “Playing Redirect Games With ARP and ICMP”; <http://packetstorm.securify.com/mag/keen/kv7.txt>; 6/25/01.
- 7) Whalen, Sean; “An Introduction to ARP Spoofing”; packetstorm.securify.com/papers/protocols/intro_to_arp_spoofing.pdf; 6/25/01.
- 8) DNS Abuse; <http://packetstorm.securify.com/papers/protocols/mi004en.htm>; 6/30/01.
- 9) Erdfelt, Johannes; “Everything You Ever Wanted to Know About DNS Spoofing”; <http://www.the-project.org/admins/0897-1097/0381.html>; 7/1/01.

Upcoming Training

Click Here to
{Get CERTIFIED!}



SANS Las Vegas 2019	Las Vegas, NV	Jan 28, 2019 - Feb 02, 2019	Live Event
SANS Security East 2019	New Orleans, LA	Feb 02, 2019 - Feb 09, 2019	Live Event
Security East 2019 - SEC401: Security Essentials Bootcamp Style	New Orleans, LA	Feb 04, 2019 - Feb 09, 2019	vLive
SANS Northern VA Spring- Tysons 2019	Tysons, VA	Feb 11, 2019 - Feb 16, 2019	Live Event
SANS Anaheim 2019	Anaheim, CA	Feb 11, 2019 - Feb 16, 2019	Live Event
SANS Scottsdale 2019	Scottsdale, AZ	Feb 18, 2019 - Feb 23, 2019	Live Event
SANS New York Metro Winter 2019	Jersey City, NJ	Feb 18, 2019 - Feb 23, 2019	Live Event
SANS Dallas 2019	Dallas, TX	Feb 18, 2019 - Feb 23, 2019	Live Event
SANS Secure Japan 2019	Tokyo, Japan	Feb 18, 2019 - Mar 02, 2019	Live Event
Open-Source Intelligence Summit & Training 2019	Alexandria, VA	Feb 25, 2019 - Mar 03, 2019	Live Event
SANS Reno Tahoe 2019	Reno, NV	Feb 25, 2019 - Mar 02, 2019	Live Event
Mentor Session @Work - SEC401	Raleigh, NC	Feb 27, 2019 - Mar 06, 2019	Mentor
SANS Baltimore Spring 2019	Baltimore, MD	Mar 02, 2019 - Mar 09, 2019	Live Event
SANS Secure India 2019	Bangalore, India	Mar 04, 2019 - Mar 09, 2019	Live Event
Baltimore Spring 2019 - SEC401: Security Essentials Bootcamp Style	Baltimore, MD	Mar 04, 2019 - Mar 09, 2019	vLive
Community SANS Indianapolis SEC401	Indianapolis, IN	Mar 04, 2019 - Mar 09, 2019	Community SANS
SANS St. Louis 2019	St. Louis, MO	Mar 11, 2019 - Mar 16, 2019	Live Event
SANS Secure Singapore 2019	Singapore, Singapore	Mar 11, 2019 - Mar 23, 2019	Live Event
SANS London March 2019	London, United Kingdom	Mar 11, 2019 - Mar 16, 2019	Live Event
SANS San Francisco Spring 2019	San Francisco, CA	Mar 11, 2019 - Mar 16, 2019	Live Event
Mentor Session - SEC401	Fredericksburg, VA	Mar 12, 2019 - May 14, 2019	Mentor
SANS Munich March 2019	Munich, Germany	Mar 18, 2019 - Mar 23, 2019	Live Event
SANS Secure Canberra 2019	Canberra, Australia	Mar 18, 2019 - Mar 23, 2019	Live Event
SANS Norfolk 2019	Norfolk, VA	Mar 18, 2019 - Mar 23, 2019	Live Event
SANS vLive - SEC401: Security Essentials Bootcamp Style	SEC401 - 201903,	Mar 19, 2019 - Apr 25, 2019	vLive
SANS 2019 - SEC401: Security Essentials Bootcamp Style	Orlando, FL	Apr 01, 2019 - Apr 06, 2019	vLive
SANS 2019	Orlando, FL	Apr 01, 2019 - Apr 08, 2019	Live Event
Community SANS Raleigh SEC401	Raleigh, NC	Apr 01, 2019 - Apr 06, 2019	Community SANS
SANS London April 2019	London, United Kingdom	Apr 08, 2019 - Apr 13, 2019	Live Event
Blue Team Summit & Training 2019	Louisville, KY	Apr 11, 2019 - Apr 18, 2019	Live Event
SANS Riyadh April 2019	Riyadh, Kingdom Of Saudi Arabia	Apr 13, 2019 - Apr 18, 2019	Live Event